

AOI2 Wireless High-Temperature Sensor Network for Smart Boiler Systems

Project No.: DE-FE0031895

Dr. Xuejun Lu, Dr. Xingwei Wang, and Dr. Tricia Chigan (subject to DOE approval) University of Massachusetts Lowell (UML)

Dr. Dongsheng Li, Advanced Manufacturing LLC (subcontractor)

Dr. Xinsheng Lou, General Electric (GE), vendor

Federal Project Manager: Mark Render

05/20/2021

Disclaimer



Acknowledgement

This material is based upon work supported by the Department of Energy Award Number DE-FE0031895

Disclaimer:

"This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof."

Outline




- Project objective
- Background
- Methods
- Tasks
- Progress
- Future work
- Team members

Project objective



Develop a new wireless high-temperature sensor network for realtime continuous boiler condition monitoring in harsh environments

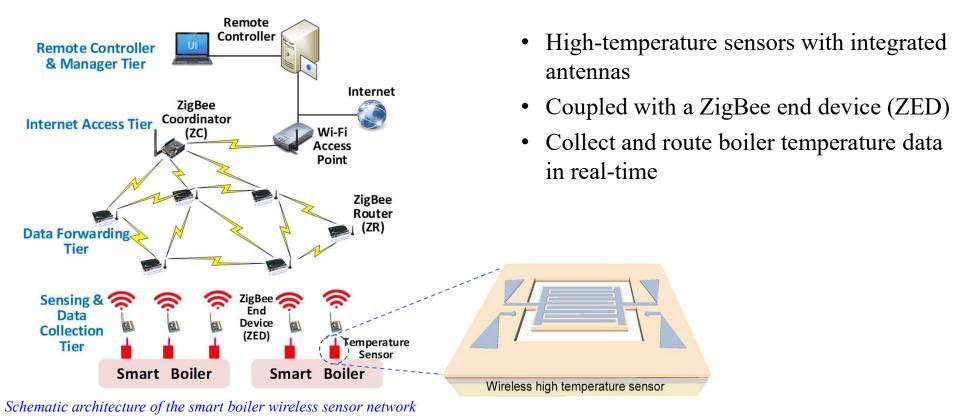

Background



The needs

- Boilers and furnaces are extensively used virtually everywhere
- These systems consume the most significant amount of energy
- Optimizing the operation of the systems can lead not only to huge energy savings and bring tremendous benefits to our environment

Estimated impacts

- 1% efficiency improvement provides energy savings of around 30 billion kilowatt-hours (kW·h)
- ~ 300 billion cubic feet of natural gas
- ~ 17 million tons of carbon emission reduction

Tasks





- **Task 1:** Obtain optimal designs of the wireless high temperature sensor network.
- **Task 2:** Fabricate the wireless high-temperature sensor and build the wireless sensor network.
- **Task 3:** Characterize the wireless high-temperature sensor and evaluate the performance of the wireless high-temperature sensor.
- **Task 4:** Determine the system stability and reliability.
- Task 5: Report.

Milestones




DOE Project Schedule



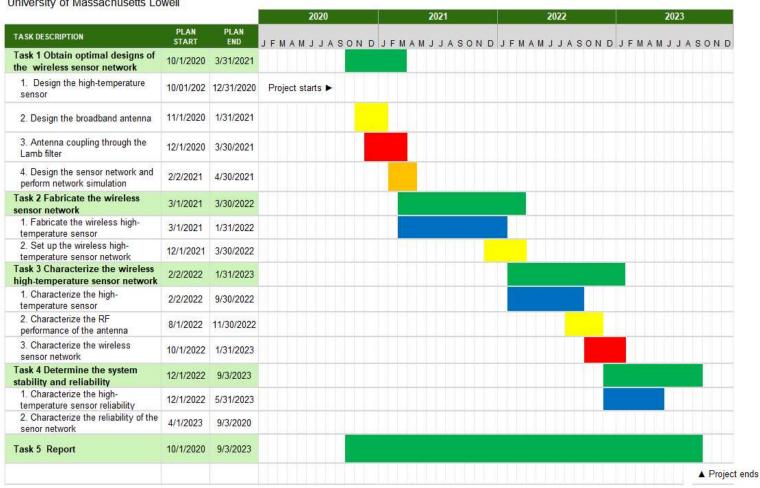




Design the High-temperature wireless sensor

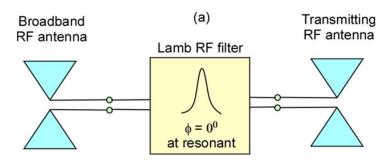

(a) Equivalent circuit

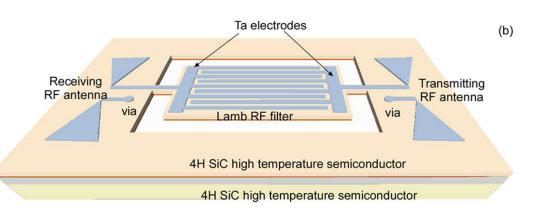


(b) 3D schematic structure


- A Lamb filter¹ sensing structure
- The high-temperature sensor and the bowtie transmission and receiving antennas are all on the 4H SiC piezoelectric substrate.
- The Lamb filter provides sharp transmission spectrum and a 0⁰ degree phase shift at the resonant frequency
- Enables strong coupling of the integrated antennas.
- The resonant frequency shifts with the temperature, allowing temperature measurement through the transmission and receiving and the coupling properties of the antennas

¹Lin, C.-M. et al. Thermally compensated aluminum nitride Lamb wave resonators for high temperature applications. Applied Physics Letters 97, 083501, doi:10.1063/1.3481361 (2010)



Lamb-filter temperature shift

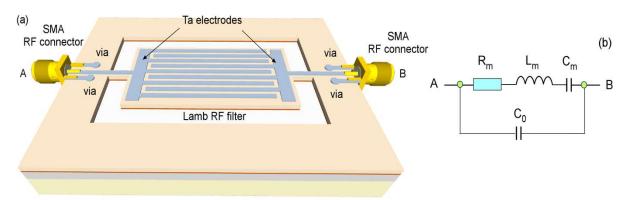

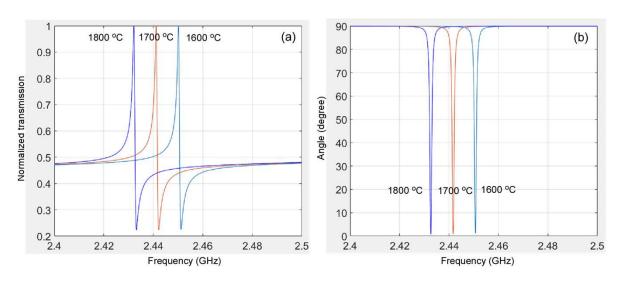

$$Y = \frac{1}{R_m + j\omega L_m + \frac{1}{j\omega C_m}} + j\omega C_0$$
$$= \frac{1 + \frac{C_0}{C_m} - \omega^2 C_m L_m + j\omega C_0 R_m}{R_m + j\omega L_m + \frac{1}{j\omega C_m}}$$


$$\Gamma = rac{F}{V} = e_{31} \cdot l$$
 $C_m = rac{\Gamma^2}{k_{eq}},$ $L_m = rac{m_{eq}}{\Gamma^2}$ $C_0 = rac{\varepsilon_r \varepsilon_0}{t} w l$


$$k_{eq} = \frac{Elt}{2w}$$
 $R_m = \frac{\sqrt{L_m/C_m}}{O}$

Lin, C.-M. et al. Thermally compensated aluminum nitride Lamb wave resonators for high temperature applications. Applied Physics Letters 97, 083501, doi:10.1063/1.3481361 (2010)



Lamb-filter temperature shift (900 MHz)

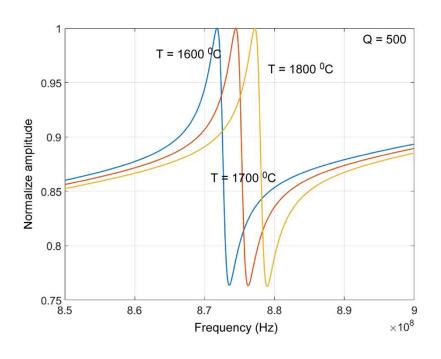

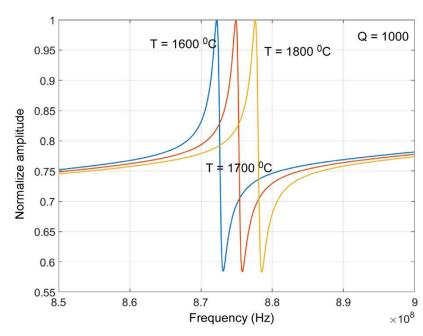



Summary of design parameters

Design parameters for 2.4 GHz filter

Length (mm)	Thickness (mm)	Width (mm)	CTE (/K)	Meq (kg)	e31 (C/m^2)	E (Pa)	
6.0	0.2	0.0104	-42e-6	1.25×10 ⁻⁶	0.2	7.0×10 ¹¹	


Design parameters for 900 MHz filter

Length (mm)	Thickness (mm)	Width (mm)	CTE (/K)	Meq (kg)	e31 (C/m^2)	E (Pa)	
6.0	0.2	0.0285	-42e-6	1.25×10 ⁻⁶	0.2	7.0×10 ¹¹	


Methods



Broadband antenna

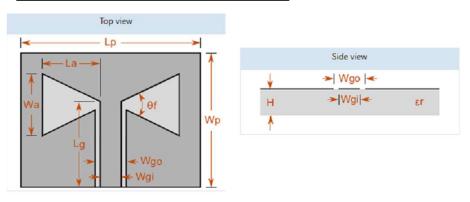

Antenna design parameters using Antenna Magus and CST Microwave Studio®.

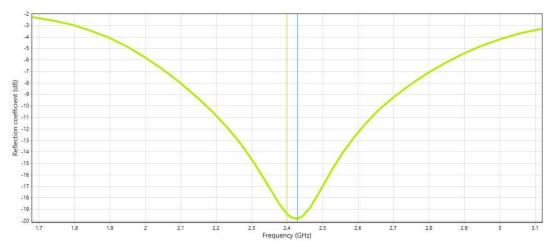

Simulated 3dB bandwidth. A broadband operation of 800 MHz can be achieved


• Antenna coupling

$$S_{11} = \frac{Z_L - Z_0}{Z_L + Z_0} \qquad Z_L = Z_0 \frac{1 + \Gamma e^{-j\beta L}}{1 - \Gamma e^{-j\beta L}} \qquad \Gamma = \left(\frac{Z_{filter} Z_{antenna}}{Z_{filter} + Z_{antenna}} - Z_0\right) / \left(\frac{Z_{filter} Z_{antenna}}{Z_{filter} + Z_{antenna}} + Z_0\right) / \left(\frac{Z_{filter} Z_{antenna}}{Z_{filter} + Z_{antenna}} - Z_0\right) / \left(\frac{Z_{filter} Z_{antenna}}{Z_0} - Z_0\right) / \left(\frac{Z_{filter} Z_0}{Z_0} - Z_0\right) / \left(\frac{Z_0}{Z_0} - Z_0\right) / \left(\frac$$



2.4 GHz antenna S11


	Relative permittivity	La	Wa	Lр	Wp	Lg	Wgi	Wgo
2.8	9.66	33.3	40.5	90	90	66.6	3.2	5.2

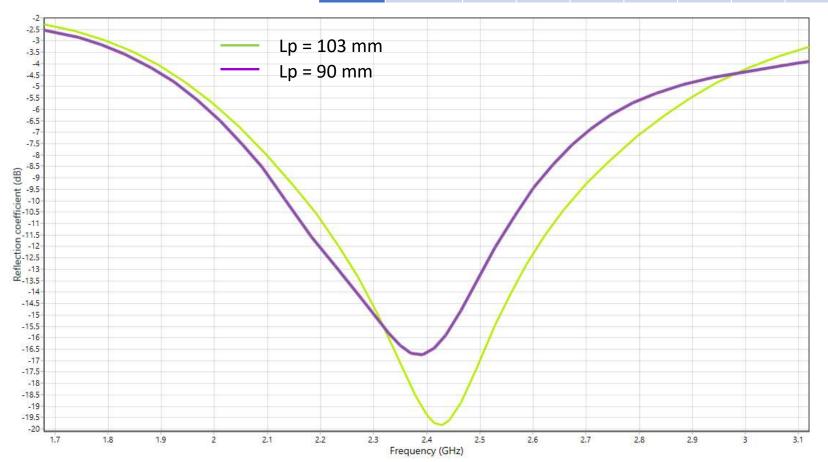




2.4 GHz antenna gain

	Relative permittivity	La	Wa	Lp	Wp	Lg	Wgi	Wgo
2.8	9.66	33.3	40.5	90	90	66.6	3.2	5.2

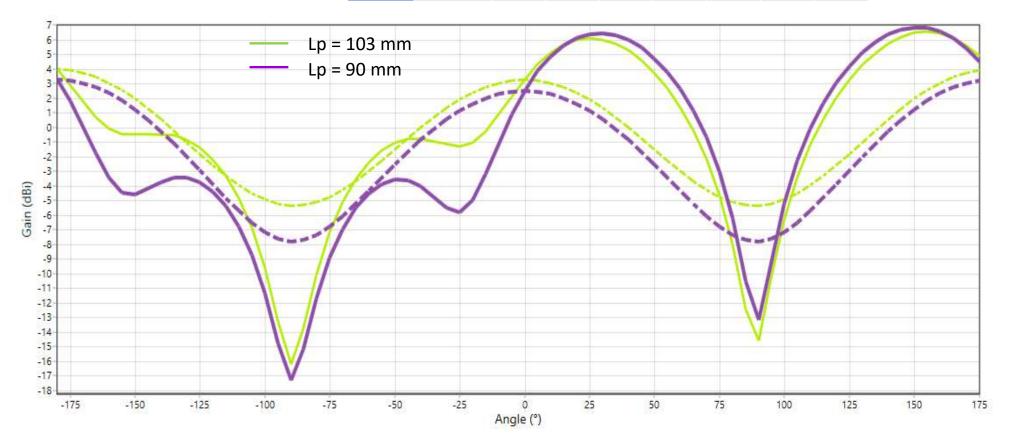




VSWR

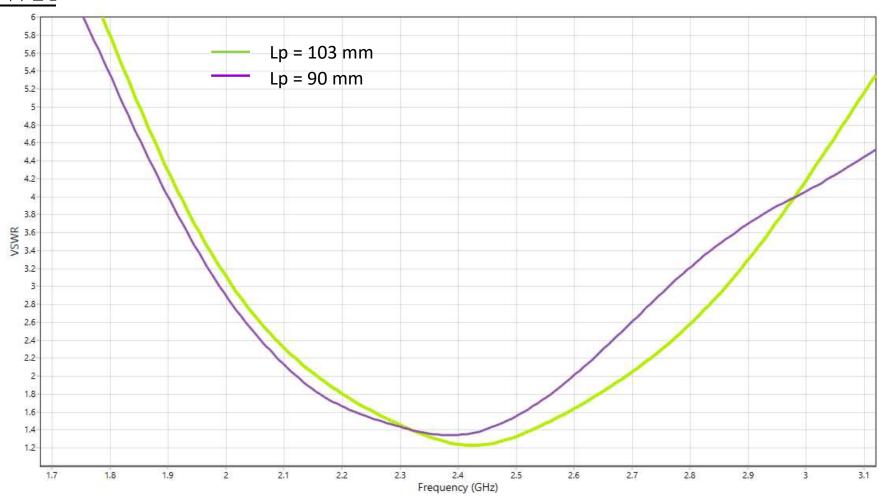




3D antenna pattern (dBi)

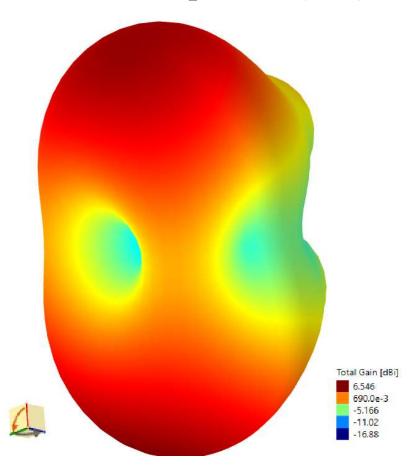


Smith chart

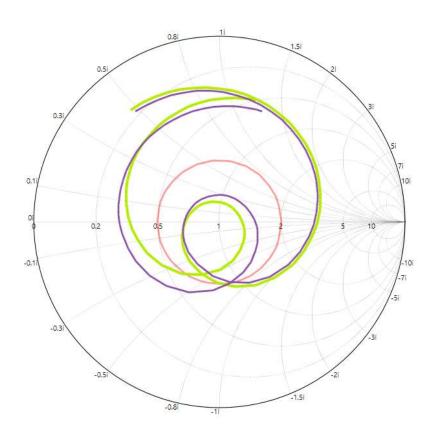

Task 2.2



Set up the wireless high-temperature sensor network testbed

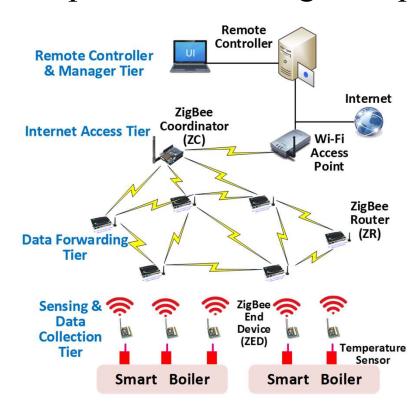


High-temperature WSN testbed

- Include Different ZigBee PRO devices (ZigBee End Device (ZED), ZigBee Router (ZR), and ZigBee Coordinator (ZC)).
- Implement several augmented routing protocol candidates (e.g., ARTO-AODV, EA-AODV, AODV-FL) in the Ad-hoc Ondemand Distance Vector (AODV) routing protocol family
- Evaluate and compare both non-beaconenabled and beacon-enabled modes at the MAC layer
- Validate the most energy-efficient channel access mechanism with low/tolerable transmission latency

Task 2.2 RF wireless sensor network set up




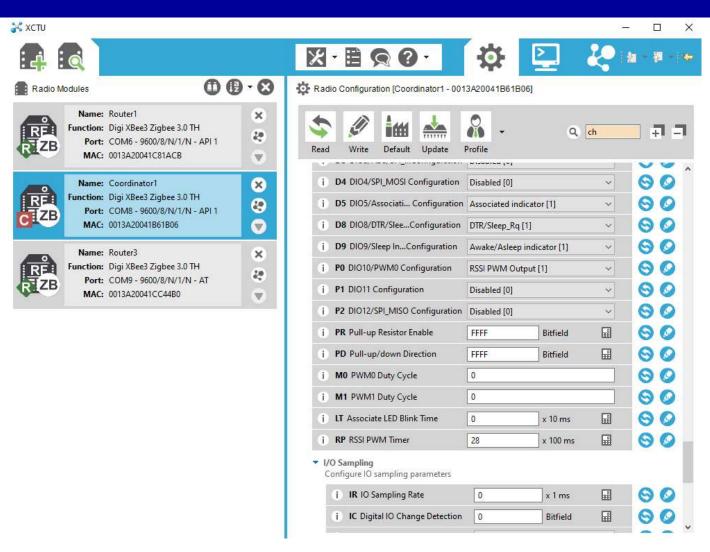


- Up to 4000 ft (1200 m) out door
- Integrated Wire SMT antanna
- +5 dBm transmission power
- -100 dBm receiver sensitivity
- UART, SPI serial data interface
- Flexible channel selections
- Configuration of arbitrary number of network nodes and the properties
- Different types of networks, including Wireless Sensor Networks (WSN) data transmission modes: transparent (AT mode), API mode, etc.
- Power saving modes with configurable sleeping time

Task 2.2 RF wireless sensor network set up



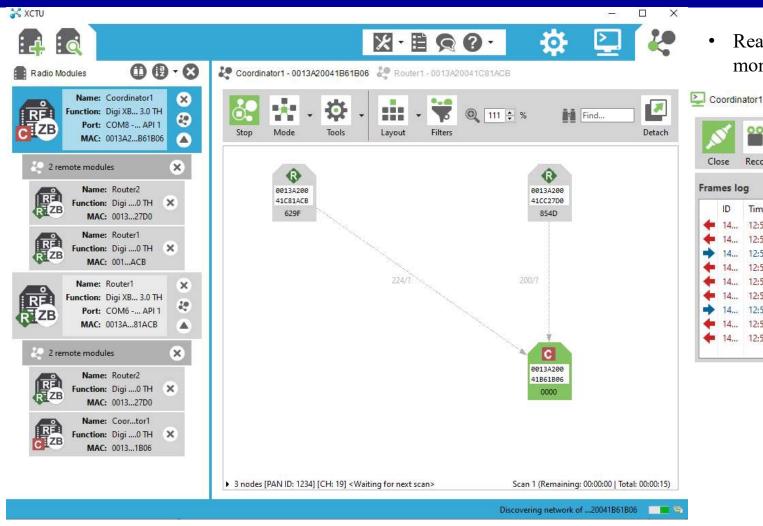

Real-time data transmission monitoring



Future work



- Continue set up the RF wireless network
- Simulate the wireless network
- Start the fabrication of the high-temperature sensor

Team members



• Dr. Xingwei Wang, US Citizen

- ☐ Ph.D. in Electrical Engineering, Virginia Tech 2006
- ☐ Research experience in optical fiber sensors and high temperature sensors

Selected Publications of Dr. Wang

- 1. Jingcheng Zhou, Xu Guo, Cong Du, Xinsheng Lou, Chengyu Cao, Xingwei Wang, "A Fiber Optic Acoustic Pyrometer for Temperature Monitoring in an Exhaust Pipe of a Boiler" IEEE Photonics Technology Letters, 31 (19), 1580-1583 (2019).
- 2. Jingcheng Zhou, Xu Guo, Cong Du, Chengyu Cao, and Xingwei Wang, "A Fiber Optic Ultrasonic Sensing System for High Temperature Monitoring Using Optically Generated Ultrasonic Waves" Sensors, 19 (2), 404 (2019).
- 3. Xu Guo, Jingcheng Zhou, Cong Du, and Xingwei Wang, "Highly Sensitive Miniature All-Silica Fiber Tip Fabry-Perot Pressure Sensor", IEEE Photonics Technology Letters, 2019.
- 4. Jingcheng Zhou, Xu Guo, Cong Du, and Xingwei Wang, "Ultrasound beam steering using a fiber optic ultrasound phased array", Optics Letters, 44(21), 5390-5393 (2019).
- 5. Xu Guo, Nan Wu, Jingcheng Zhou, Cong Du and Xingwei Wang (2020). Validation of an ultrasound transducer's generation and receiving function on one single-mode fiber. Optics and Lasers in Engineering, 127, 105962.

Team members



- Dr. Tricia Chigan, US Permanent Resident (subject to DOE's approval)
 - ☐ Ph.D. in Electrical Engineering, State University of New York at Stony Brook 2002
 - 18 years research experience in wireless networking

Selected Publications of Dr. Chigan

- 1. L. Li, C. Chigan, "An Energy-Efficient Privacy Preserving Security-oriented DSA with Low Latency," *IEEE Transactions on Vehicular Technology*, Vol. 68 (11), pp. 11283-11294, Nov., 2019.
- 2. S.Yuan, L. Li, C. Chigan, "On MMD-based Secure Fusion Strategy for Robust Cooperative Spectrum Sensing," *IEEE Transactions on Cognitive Communications and Networking*, Vol. 5 (3), pp. 504-516, Sept., 2019.
- 3. L. Li, S.Yuan, C. Chigan, "A Relay Selection based Bidirectional Full-Duplex Communication Scheme," in Proceedings of IEEE ICC 2018 Workshop 3rd Workshop on Full-Duplex Communications for Future Wireless Networks, May, 2018.
- 4. S.Yuan, L. Li, C. Chigan, H. Zhu, "Stochastic Game Approach for Long-term Fairness-aware Radio Resource Allocation," in Proceedings of IEEE Global Communications Conference (Globecom 2017), Dec. 2017.
- 5. C. Zou, C. Chigan, "Dynamic Spectrum Access based Cryptosystem for Cognitive Radio Networks," *Wiley Journal of Security and Communication Networks*, Oct. 2016.



Thank you!