Energy Efficient GO-PEEK Hybrid Membrane Process for Post-combustion CO_2 Capture

DOE Contract No. DE-FE0026383

Shiguang Li, Naomi Klinghoffer, Travis Pyrzynski, S. James Zhou, Howard Meyer

Gas Technology Institute (GTI)

Huynh Ngoc Tien, Fanglei Zhou, Jarvis Chen, Miao Yu

University of South Carolina (USC)

Yong Ding and Ben Bikson

Air Liquide Advanced Separations (ALaS)

NETL CO_2 Capture Technology Meeting
August 8-12, 2016

Project overview

- **Performance period**: Oct. 1, 2015 – Sep. 30, 2018
- **Funding**: $1,999,995 from DOE; $500,000 cost share
- **Objectives**: Develop a hybrid membrane process combining a graphene oxide (GO) gas separation membrane configuration unit and a PEEK hollow fiber membrane contactor (HFMC) unit to capture ≥90% of the CO_2 from flue gases with 95% CO_2 purity at a cost of electricity 30% less than the baseline CO_2 capture approach
- **Team:**

Member	Roles
gti	• Project management and planning • Quality control and CO_2 capture performance tests
University of South Carolina	• GO membrane development
Air Liquide ALaS	• PEEK membrane development
Trimeric Corporation	▪ High-level technical & economic feasibility study

Process description

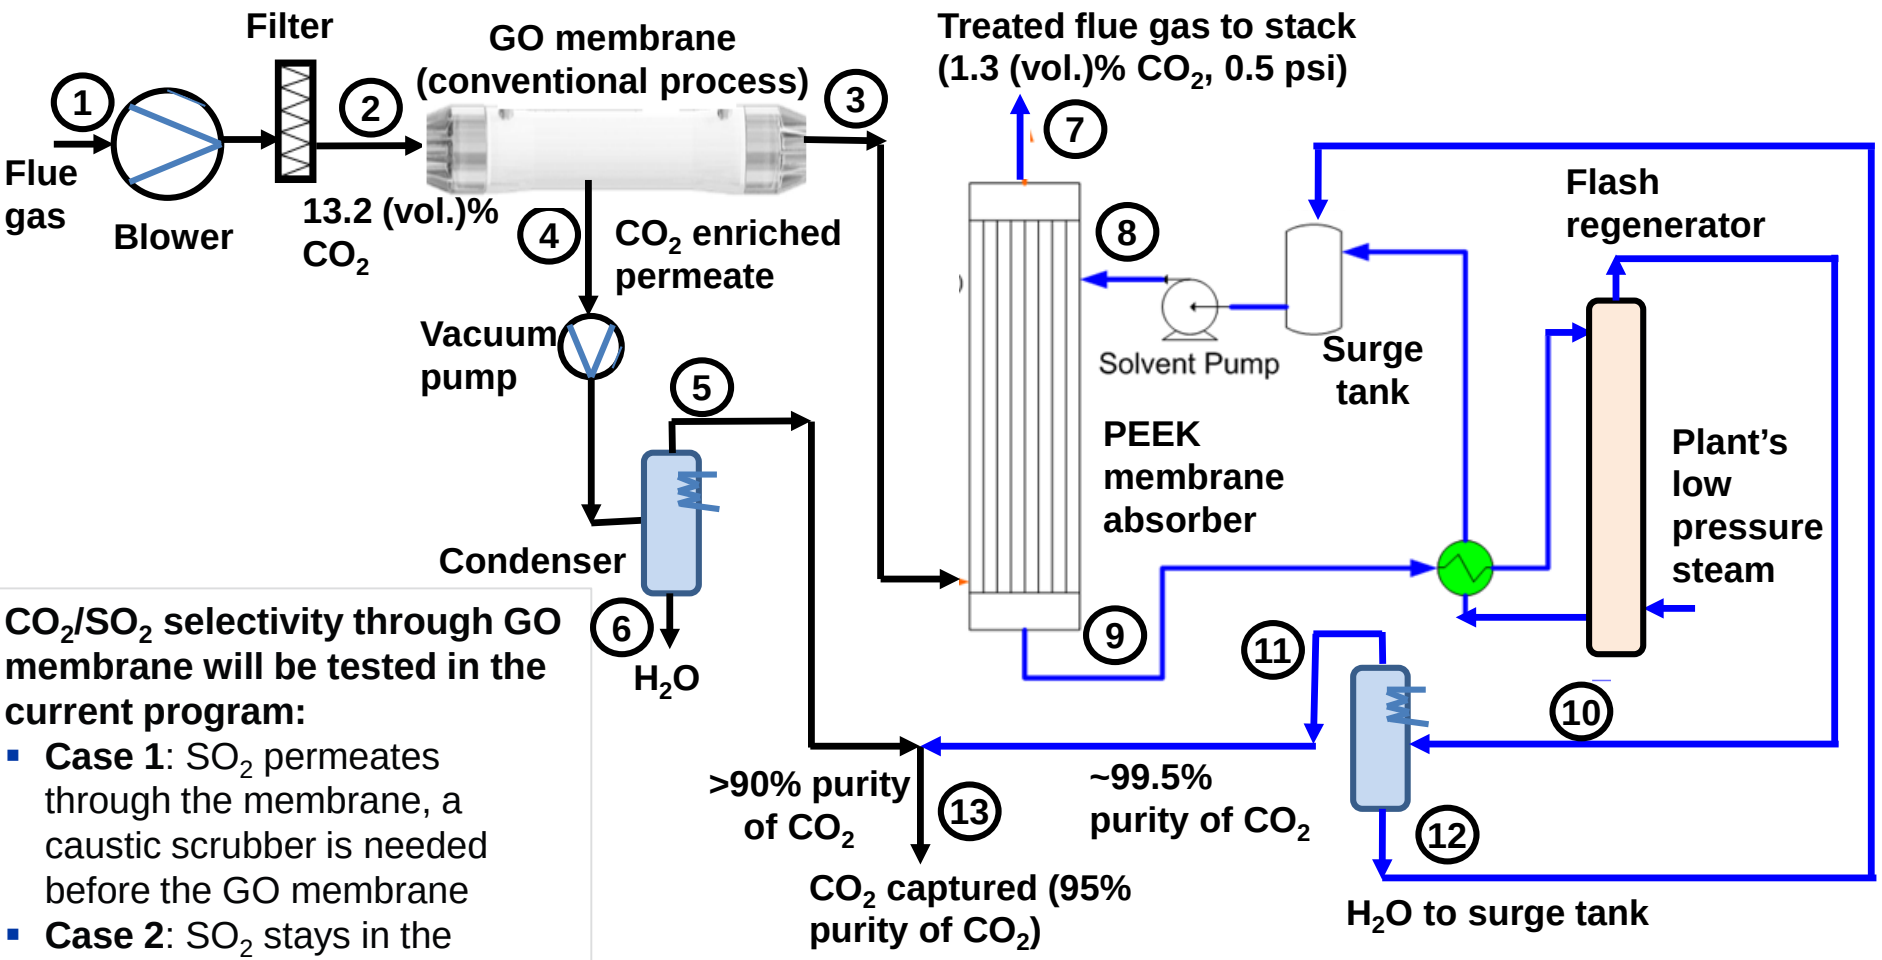

CO_2/SO_2 selectivity through GO membrane will be tested in the current program:

- **Case 1**: SO_2 permeates through the membrane, a caustic scrubber is needed before the GO membrane
- **Case 2**: SO_2 stays in the retentate, scrubber unneeded; HFMC can handle 150 ppmv SO_2 (DE-FE-0004787)

GO membrane technology based on our pioneering work published in *Science (2013, 342 (6154) 95)*

Science
AAAS

Ultrathin, Molecular-Sieving Graphene Oxide Membranes for Selective Hydrogen Separation
Hang Li *et al.*
Science **342**, 95 (2013);
DOI: 10.1126/science.1236686

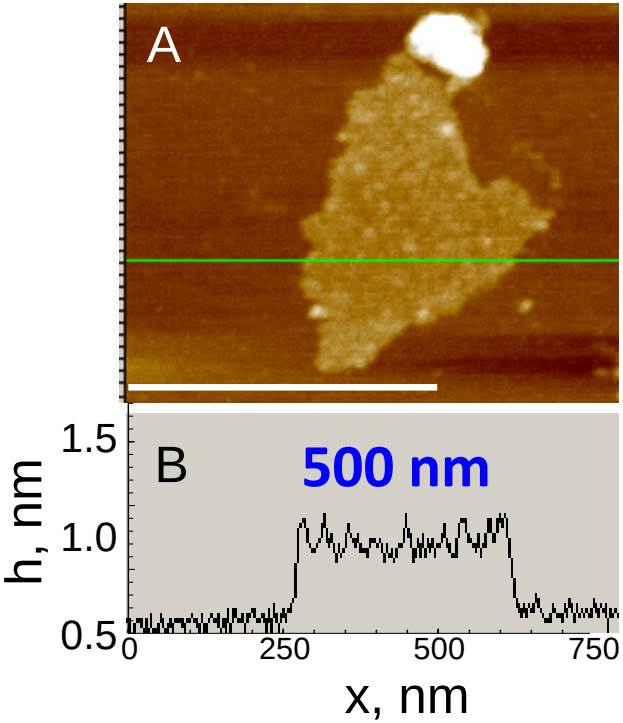

Single-layered GO flake prepared as thin as 1 nm

- **Contribution of the paper**:
  - Structure defect-free GO membrane is impermeable to gas
  - Structural defects on GO flakes can be controlled as transport pathway for selective gas separations

What is a membrane contactor?

- High surface area membrane device that facilitates mass transfer
- Gas on one side, liquid on other side

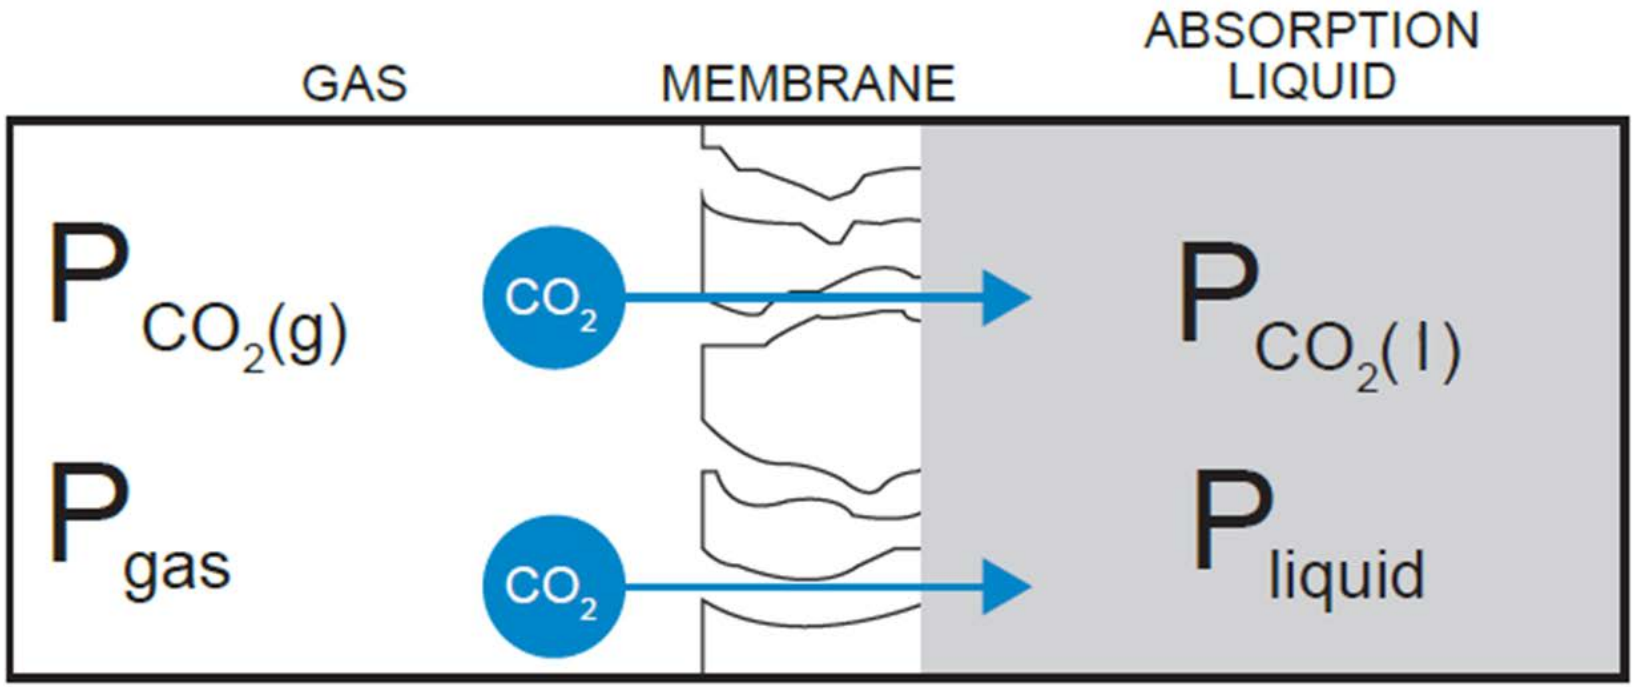

- Membrane does not wet out in contact with liquid
- **<u>Separation mechanism</u>**: CO_2 permeates through membrane, reacts with the solvent; N_2 does not react and has low solubility in solvent

Singular PEEK HFMC technology currently at small pilot scale development stage (DE-FE0012829)

Commercial-sized modules

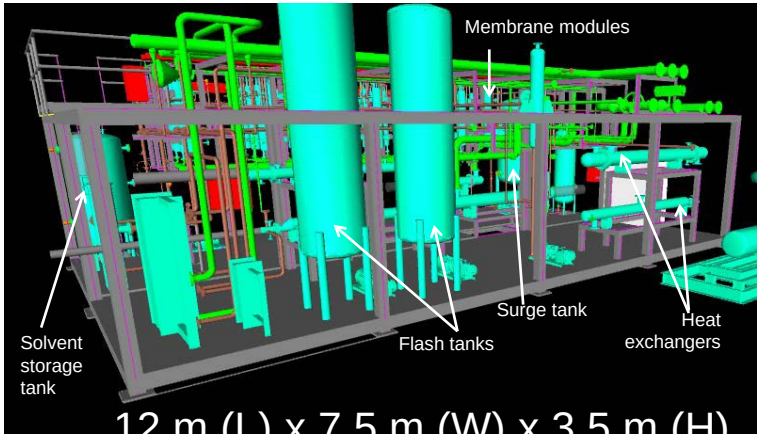

3D model of the 0.5 MW_e plant

Pilot plant construction to be completed by 9/30/16

To be tested at NCCC in 2017

GO-PEEK technical goals

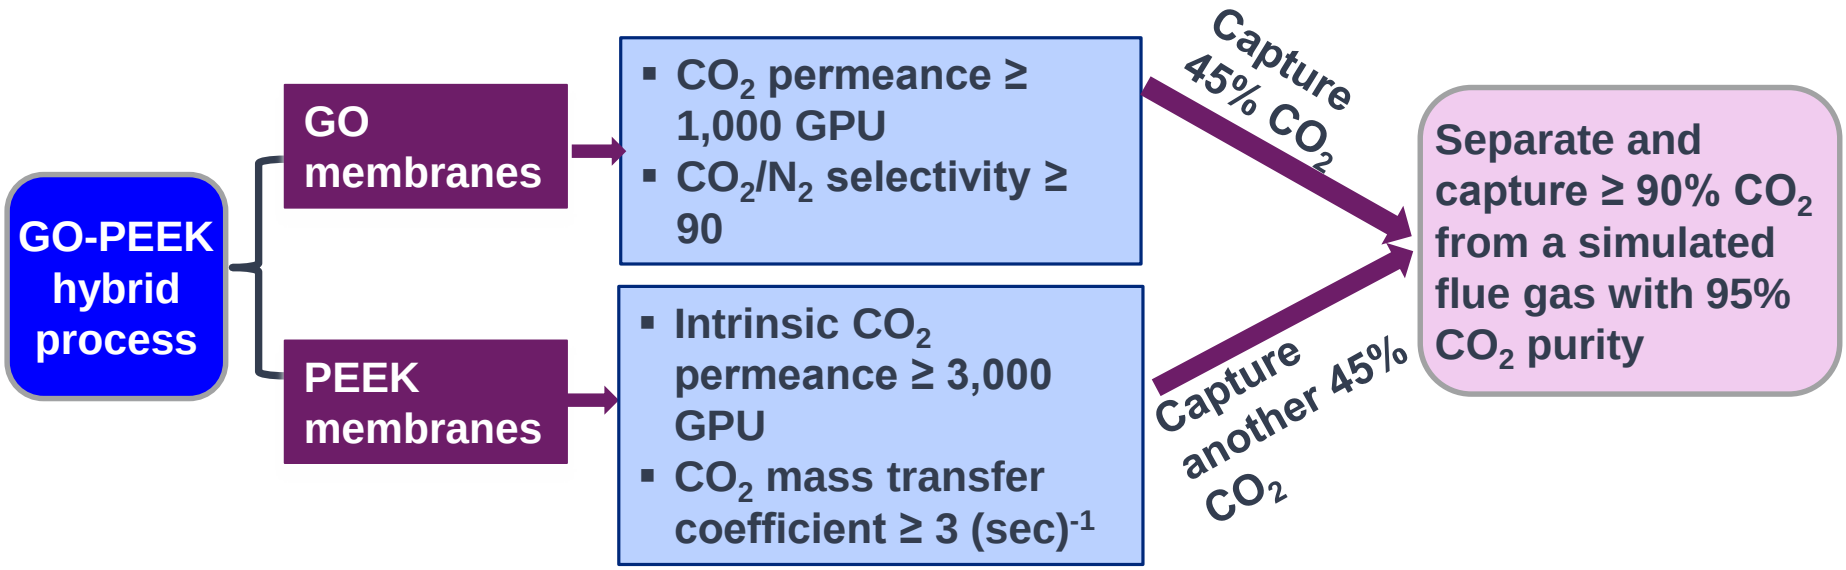

GPU= **G**as **P**ermeation **U**nit

Technical challenges of applying GO-PEEK process to existing coal-fired plants

- **GO membrane performance** – Needs significant improvement

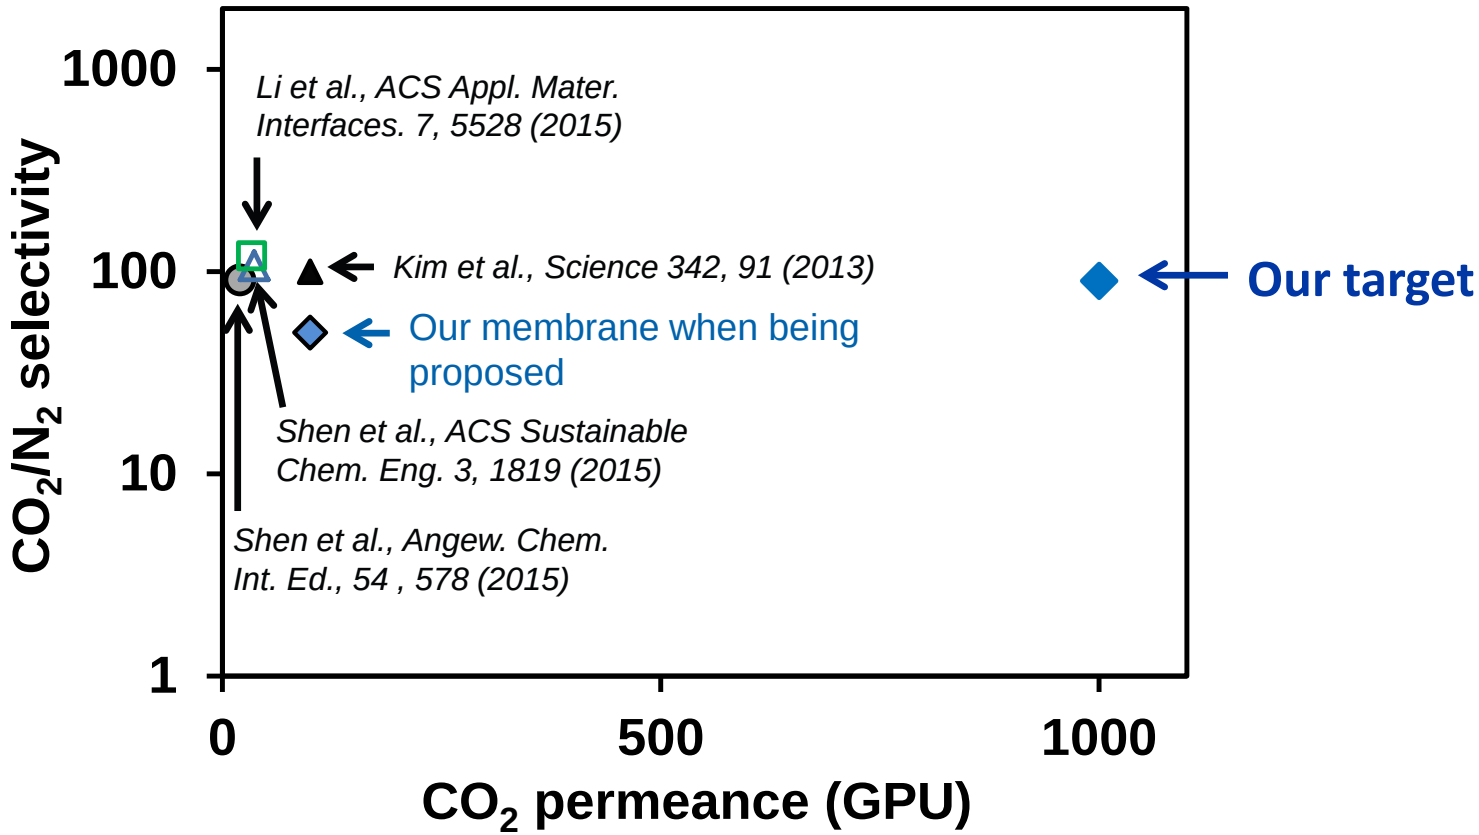

- **Durability** – Long-term stability of both GO and PEEK membranes
- **Scale-up and cost reduction** – Both membranes in hollow fiber format

Progress on GO Membranes

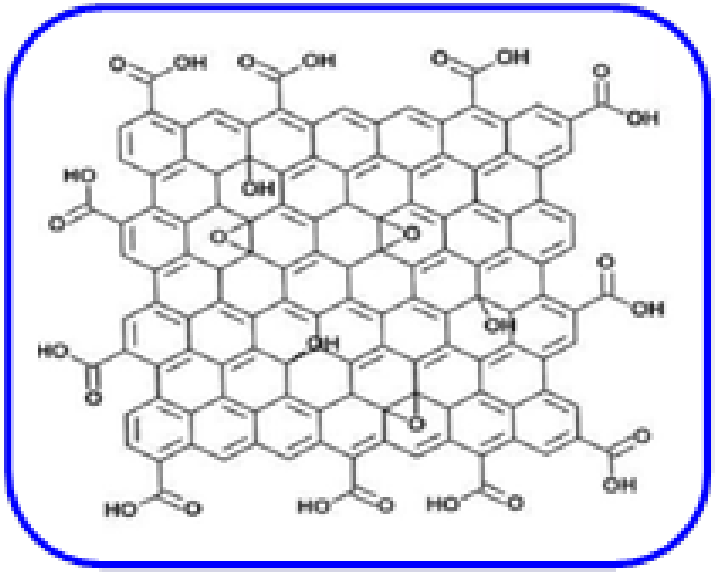

<u>GO</u>: single-atomic layered, oxidized graphene

Procedure developed for coating GO on hollow fiber (HF) support

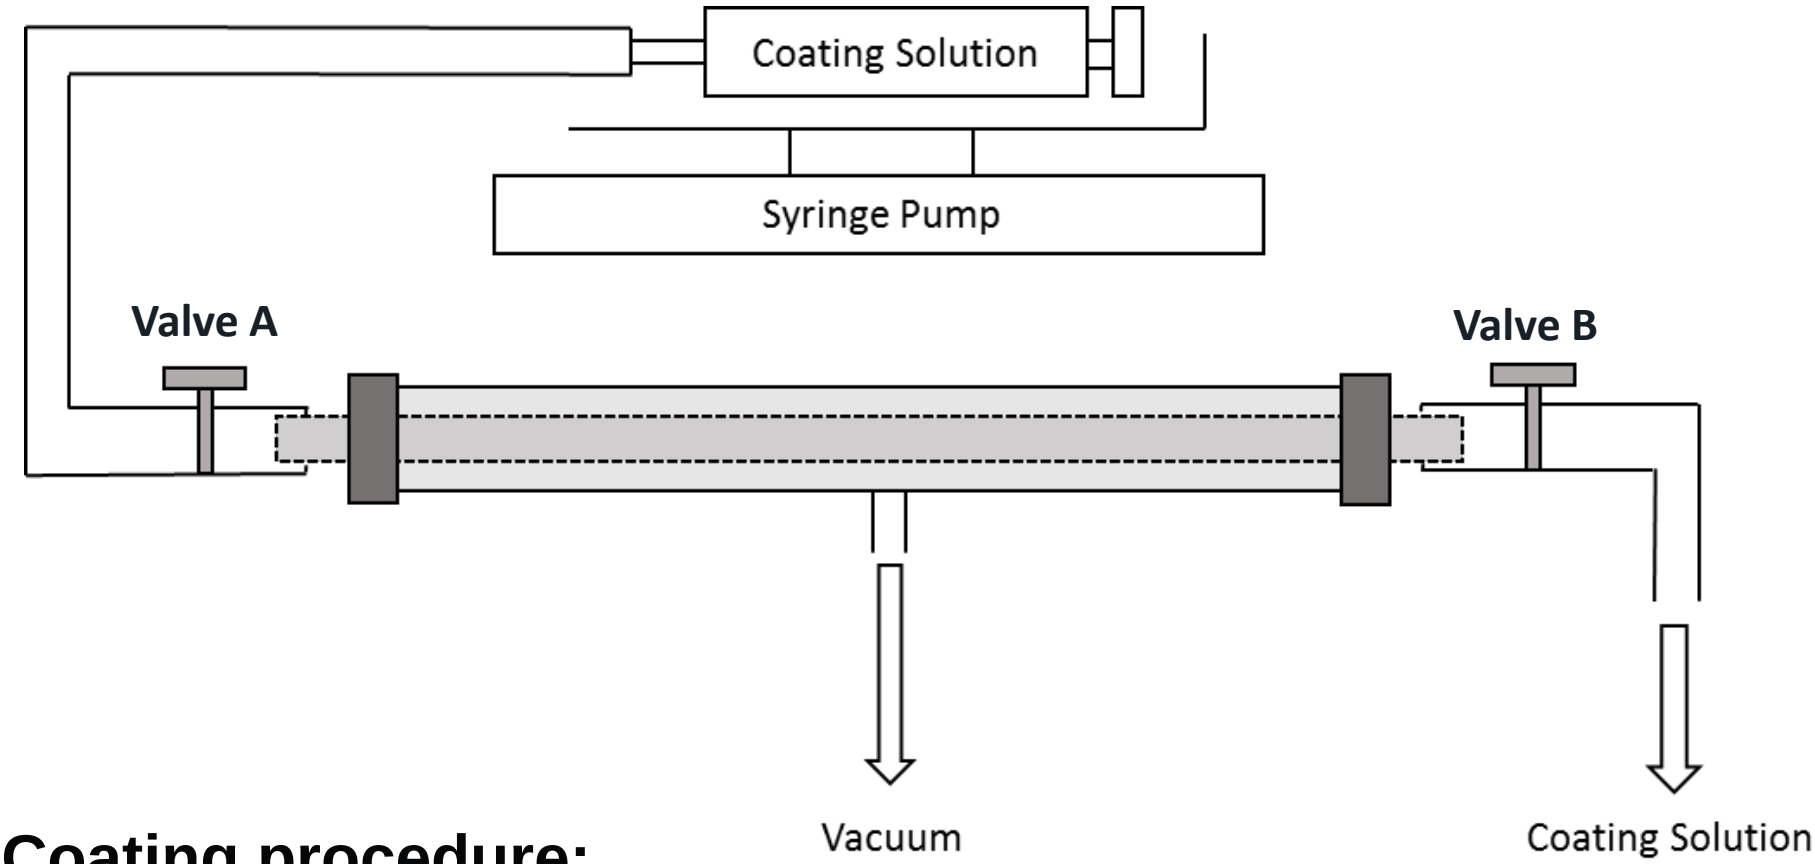

Coating procedure:

1. Valves A and B are open, GO dispersion flows continuously in hollow fiber
2. Vacuum filtration is conducted for a controlled time; and
3. Close valves A and B, leave the coated fiber under vacuum for a controlled time

GO membrane (thickness: ~40 nm) supported on polyethersulfone (PES) hollow fiber

PES fiber

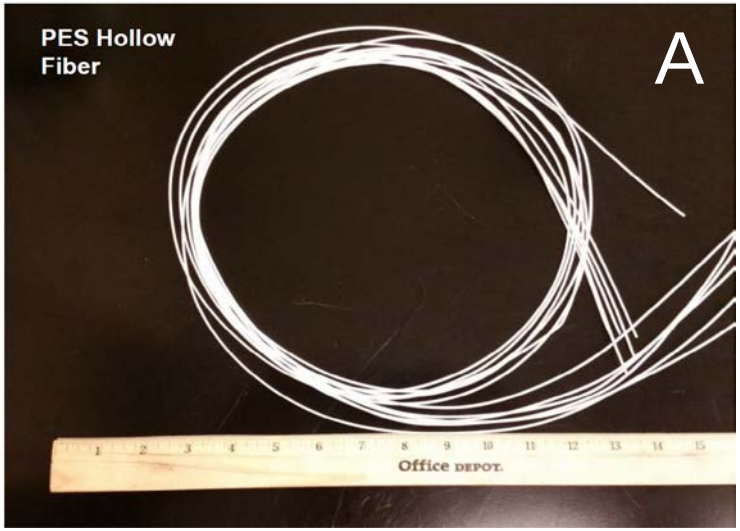

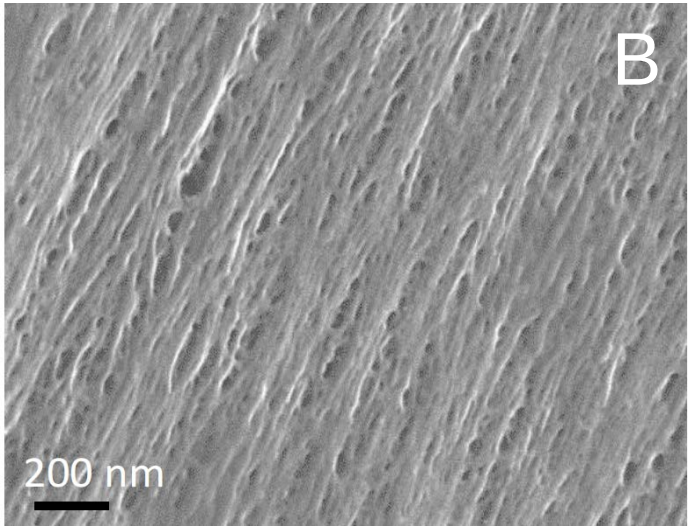

Uncoated fiber surface

Coated fiber surface

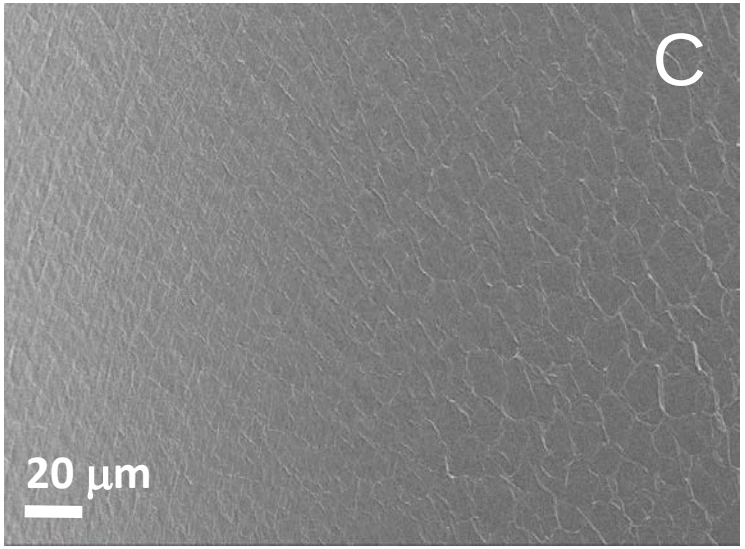

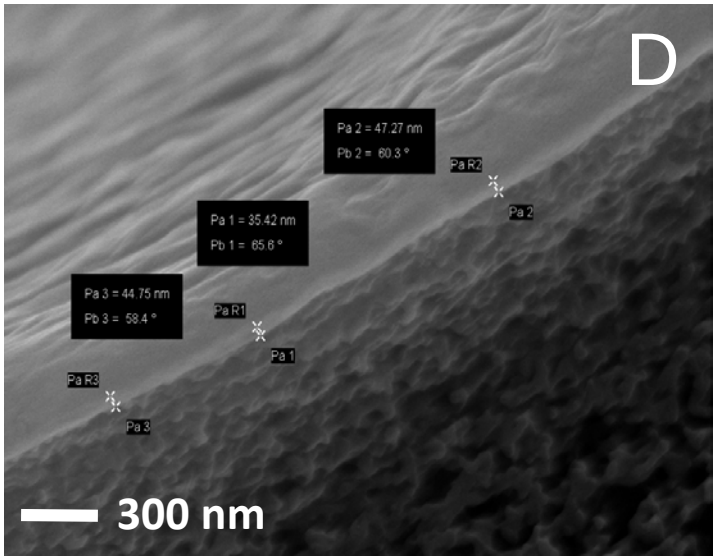

Coated fiber cross section

gti

Coated fiber sealed in a mini-module for gas permeation testing

Permeation testing unit

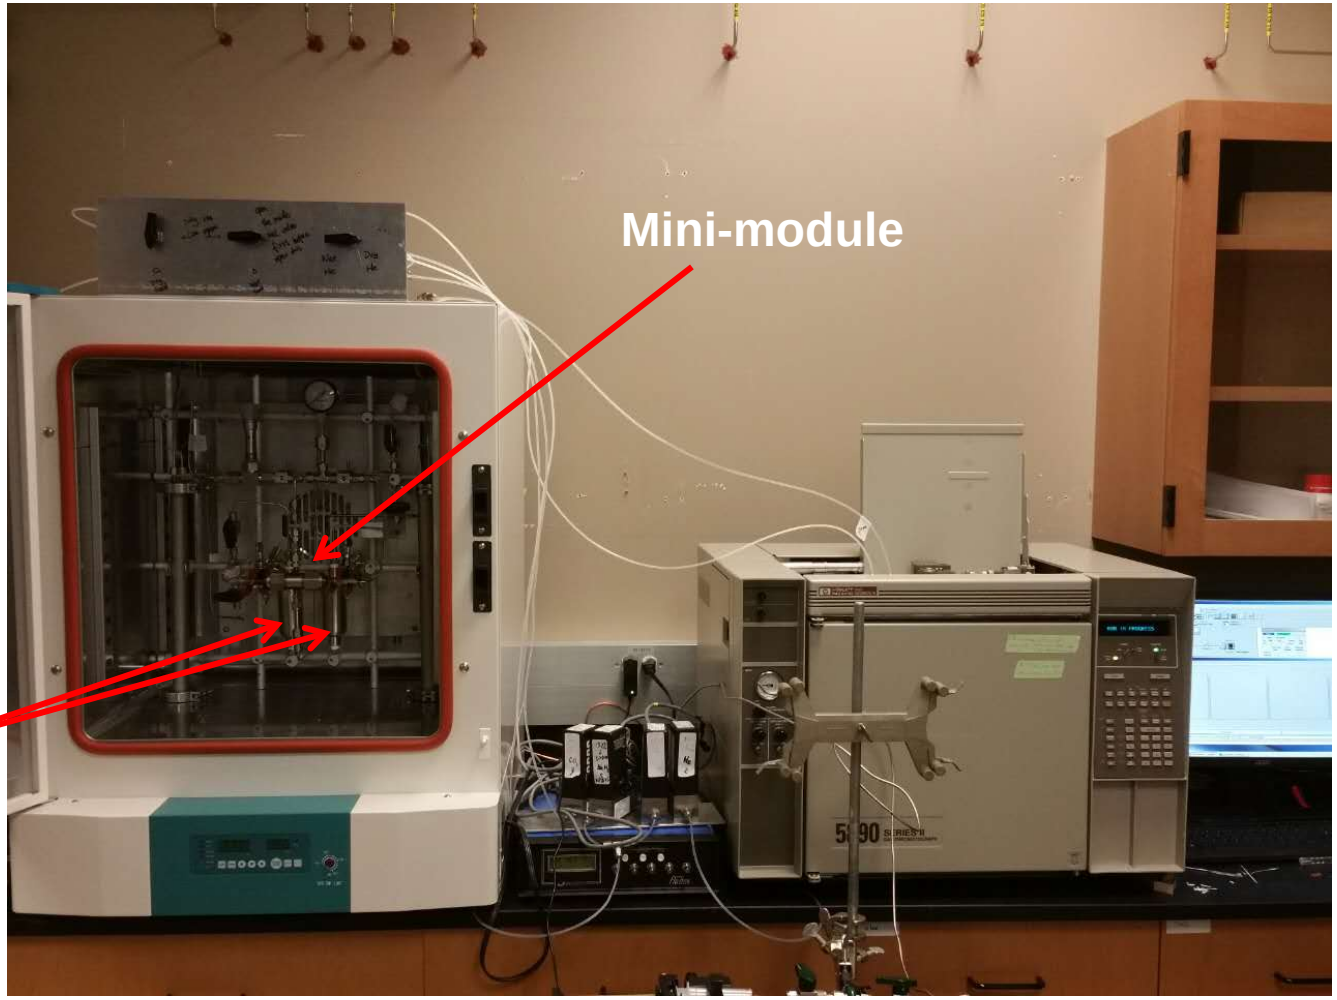

Water bubbler and knockout vessel

Approaches to improve membrane performance

- Create more structural defects on GO flake by HNO_3 etching

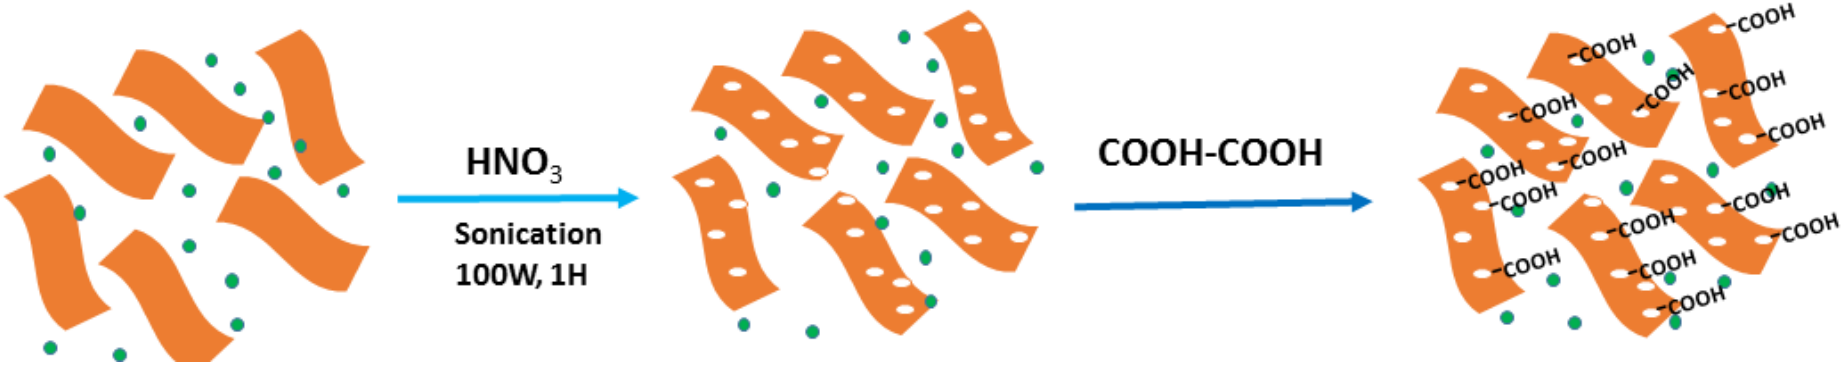

- Reduce GO flake lateral size by ultra-sonication

W/O ultra-sonication

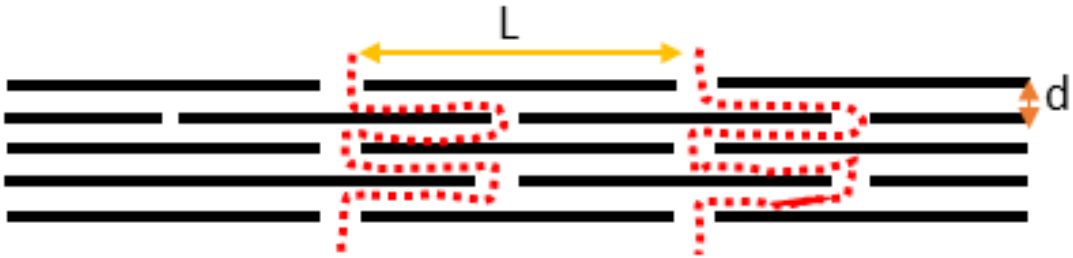

W/ ultra-sonication

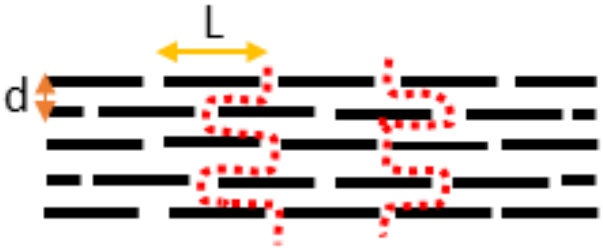

Optimized membranes showed superior performance to GO-based membranes reported in the literature

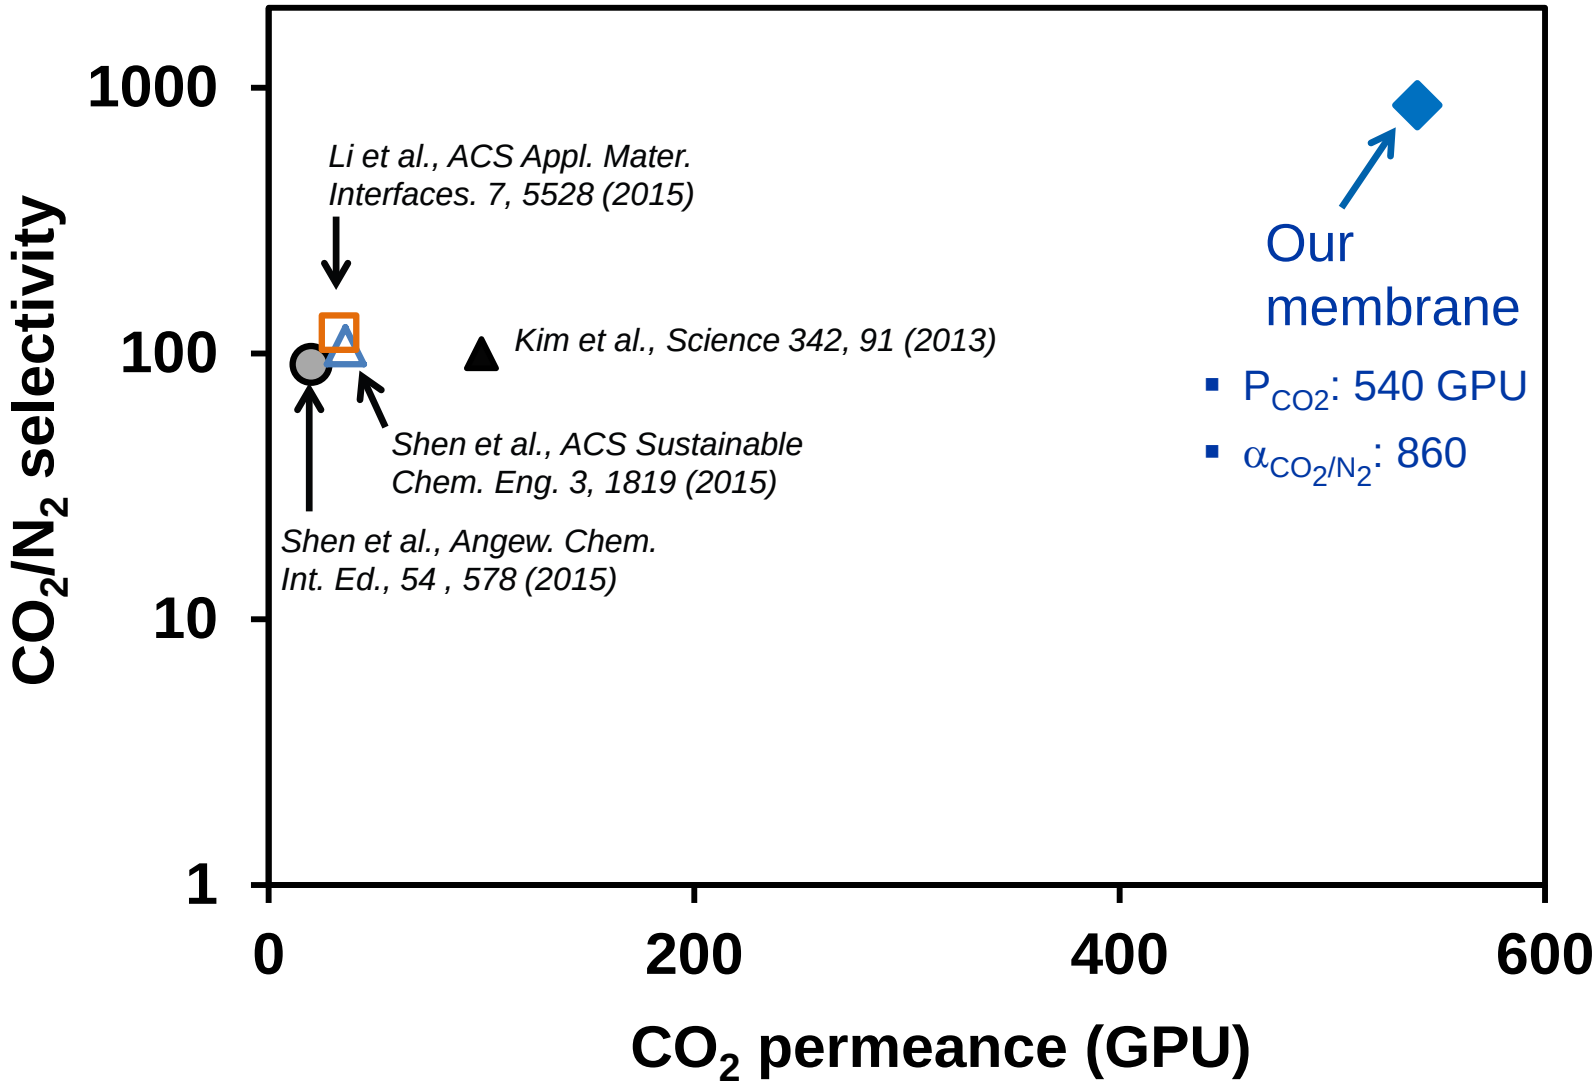

Comparison to other CO_2/N_2 separation membranes

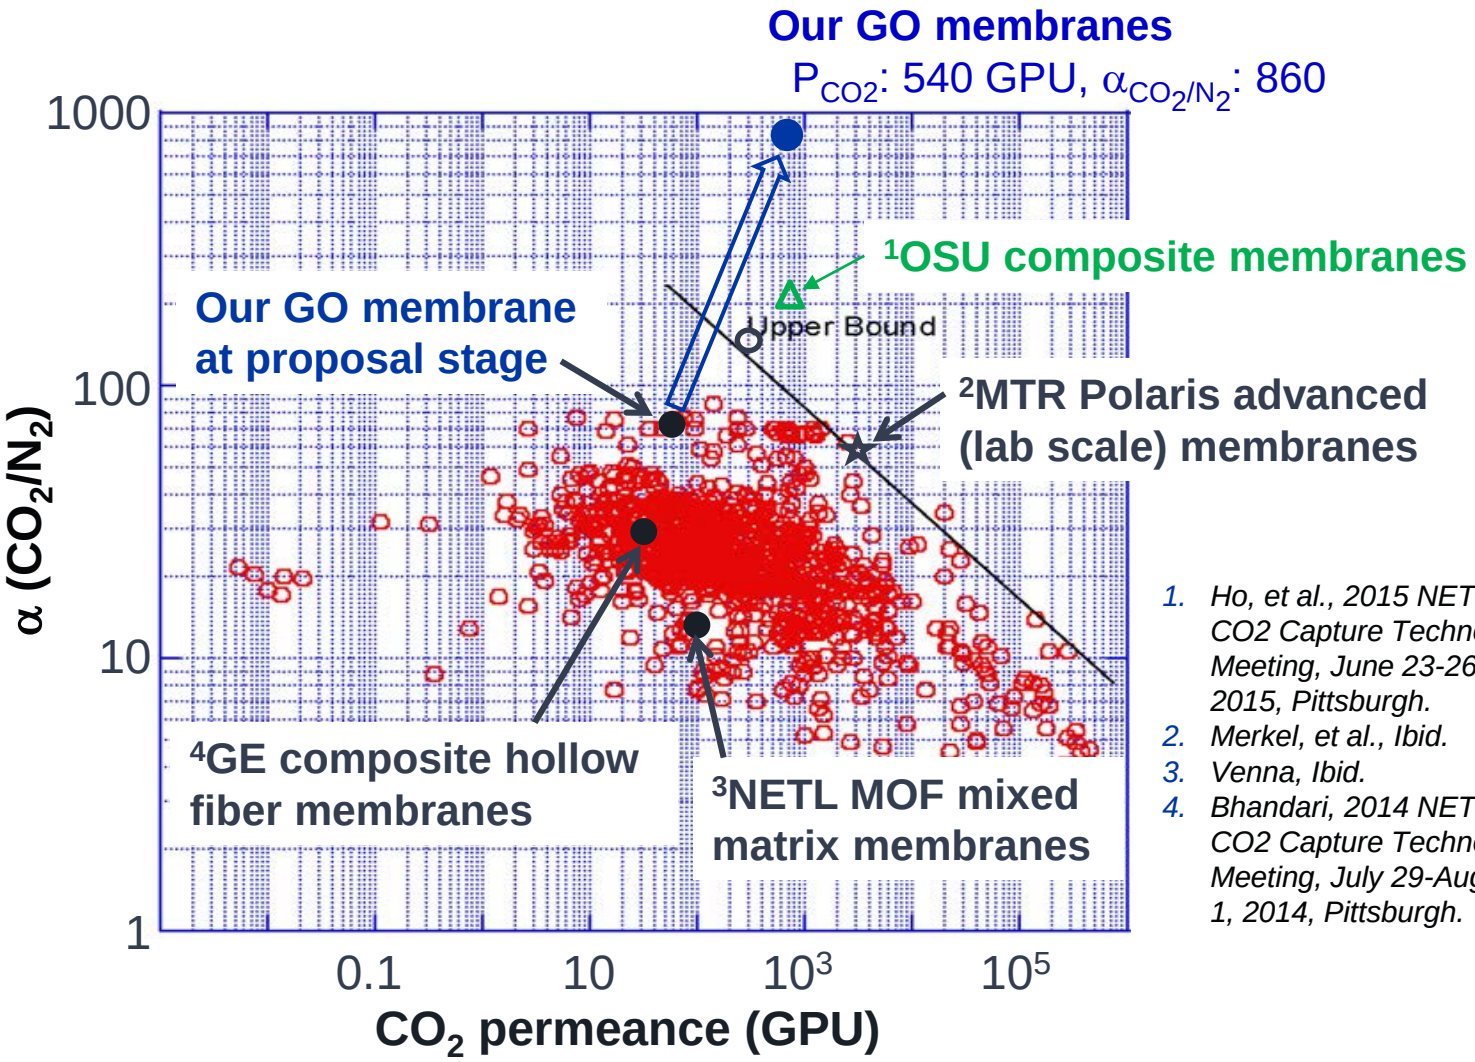

1. *Ho, et al., 2015 NETL CO2 Capture Technology Meeting, June 23-26, 2015, Pittsburgh.*
2. *Merkel, et al., Ibid.*
3. *Venna, Ibid.*
4. *Bhandari, 2014 NETL CO2 Capture Technology Meeting, July 29-August 1, 2014, Pittsburgh.*

Robeson, J. Membrane Sci. ***2008****, Vol. 320, p390*

Note: Polymer data points (red): 100 nm membrane thickness assumed

Progress on PEEK Membranes

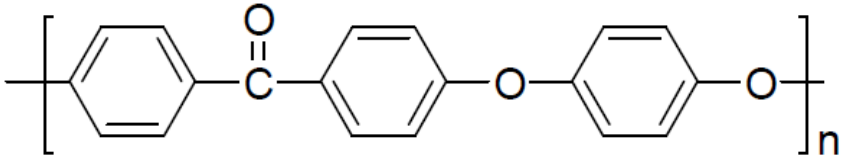

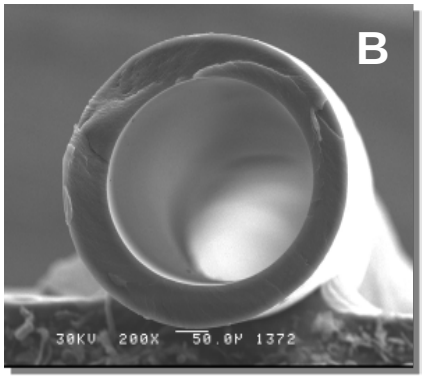

Under the current program, we are developing PEEK fibers with intrinsic CO_2 permeance of 3,000 GPU

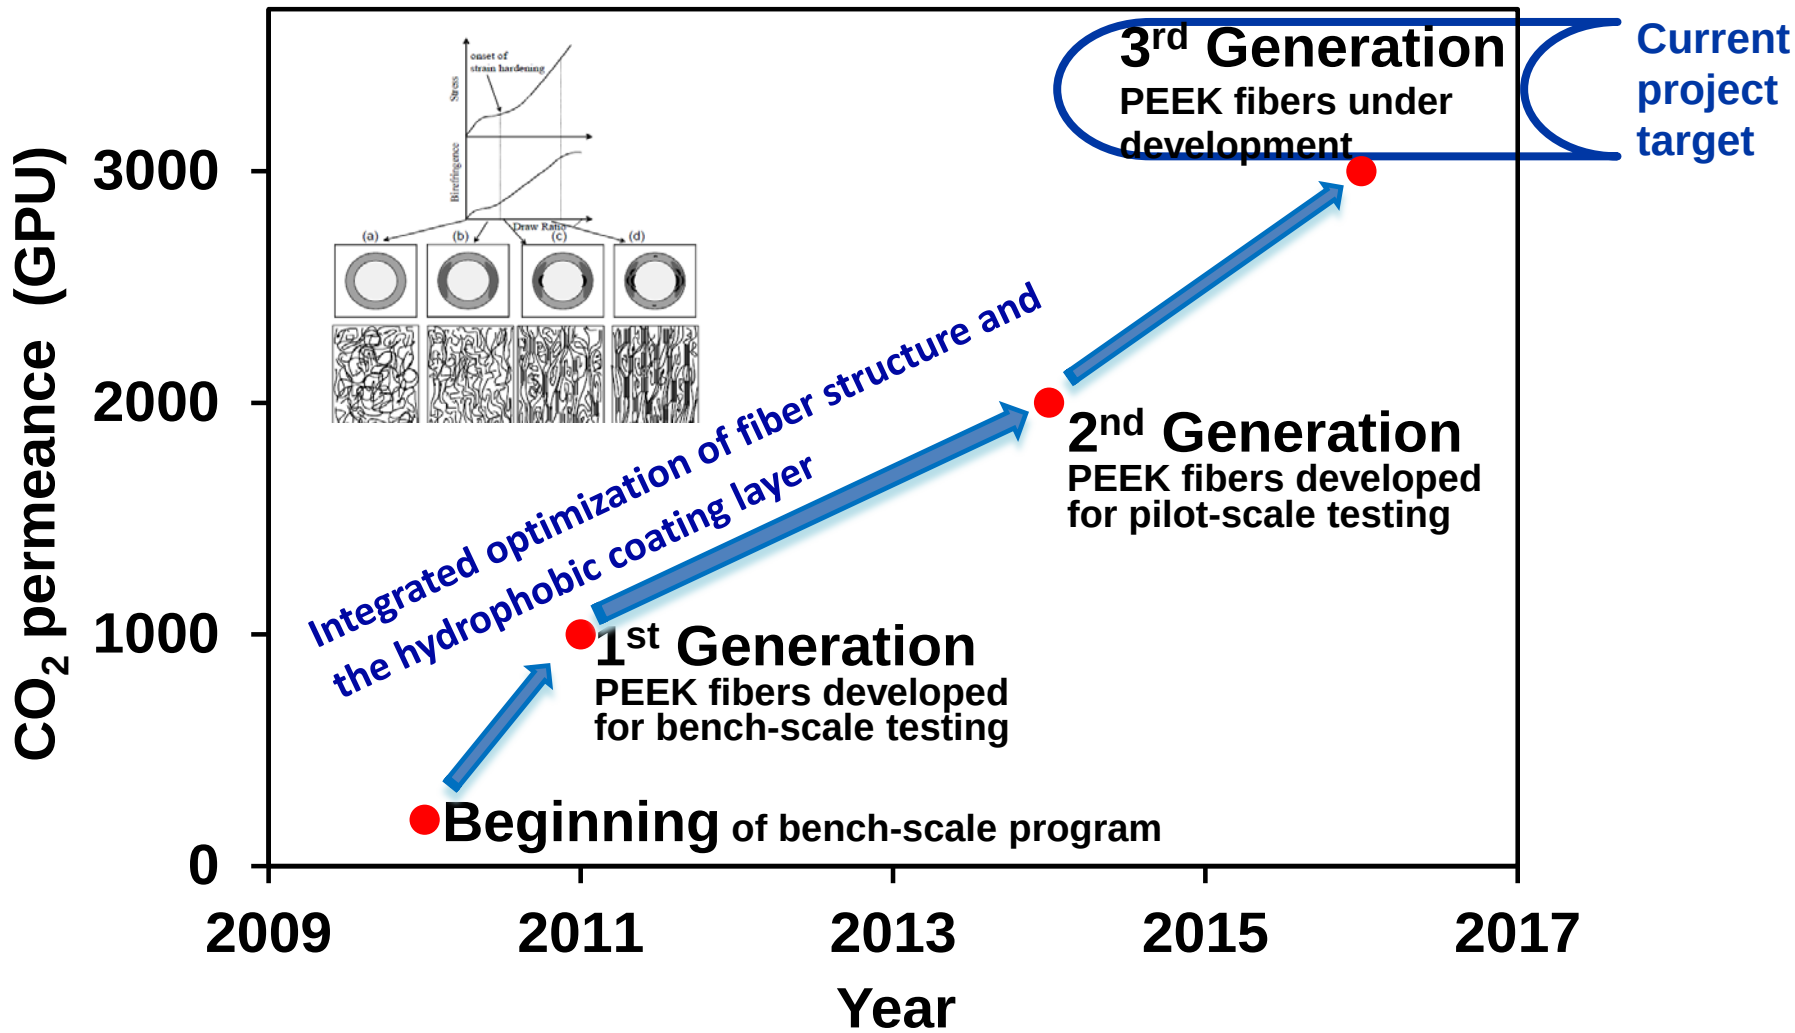

1 GPU = 1 x 10^6 cm^3 (STP)/cm^2 • s • cmHg

To date, intrinsic CO_2 permeance of 2,500 GPU obtained for a new 2-inch module

Test number	Temperature (°C)	Feed inlet pressure (psig)	Retentate pressure (psig)	Permeate pressure (psig)	CO_2 permeance (GPU)
1	22	5.35	2.7	0.27	2,500
2	22	4.31	2.4	0.18	2,400

This module showed mass transfer coefficient > 3.0 $(sec)^{-1}$ in capturing CO_2 from low CO_2-concentration feeds

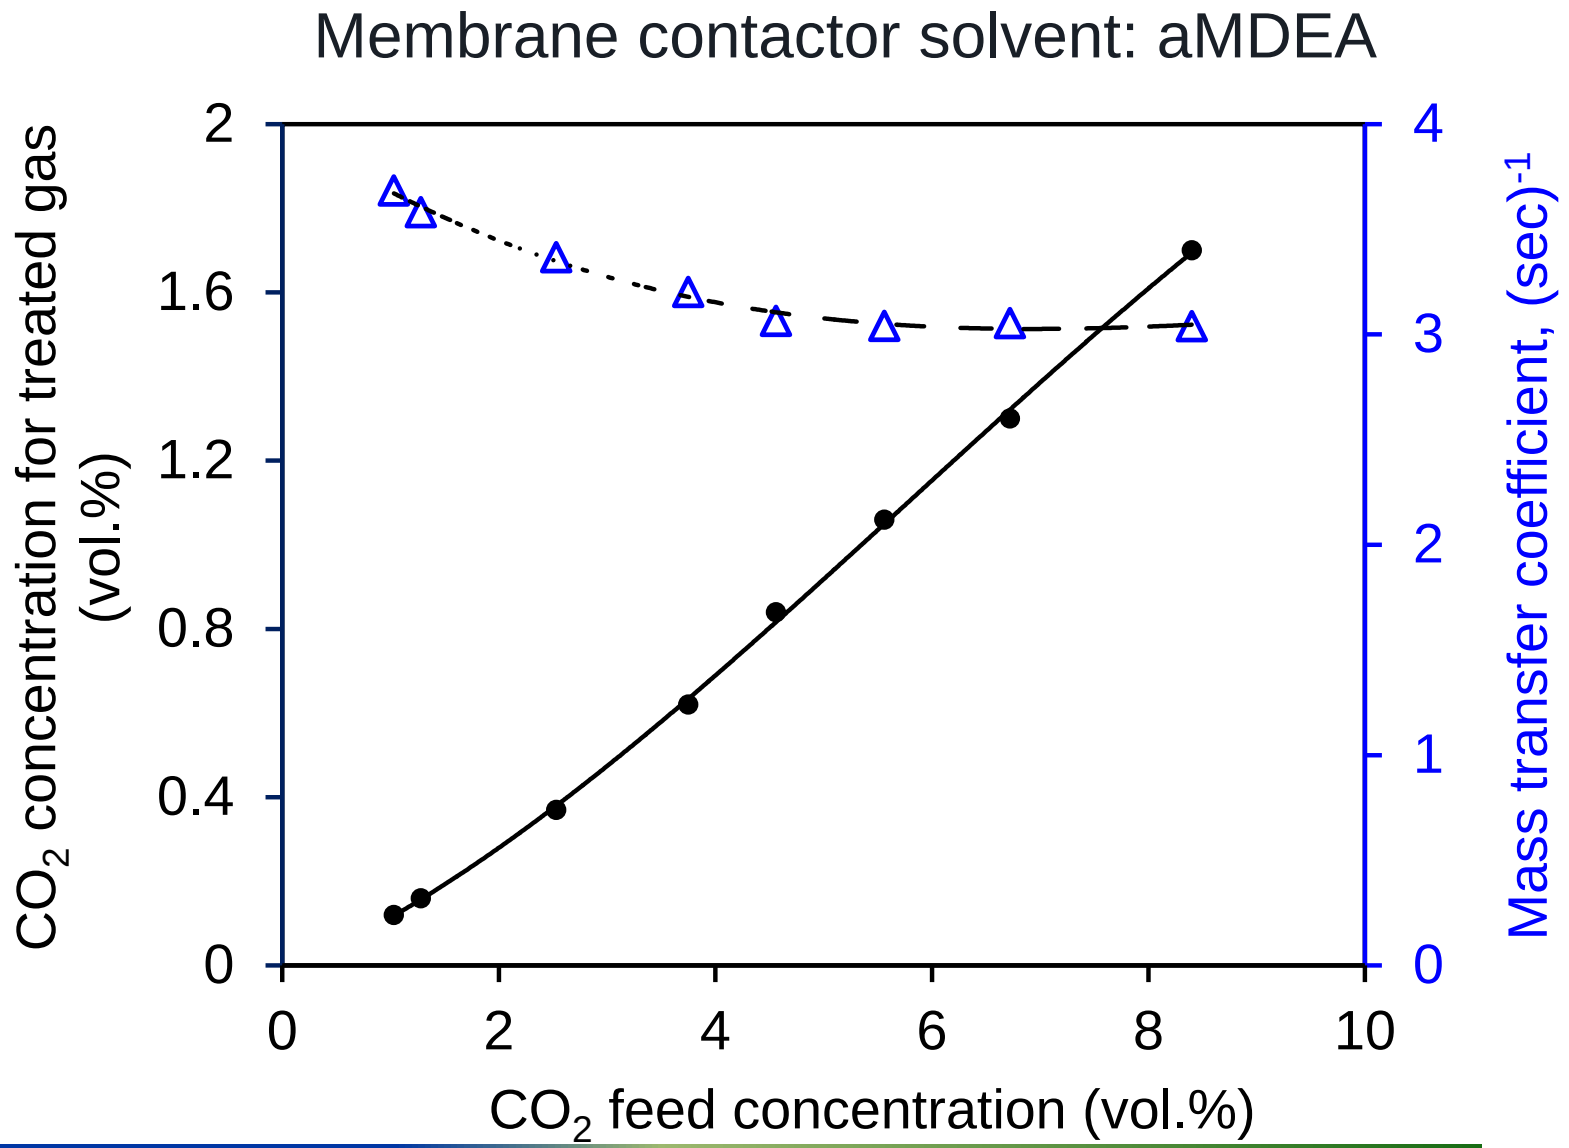

Plans for future development in this project

- Further development for GO and PEEK membranes

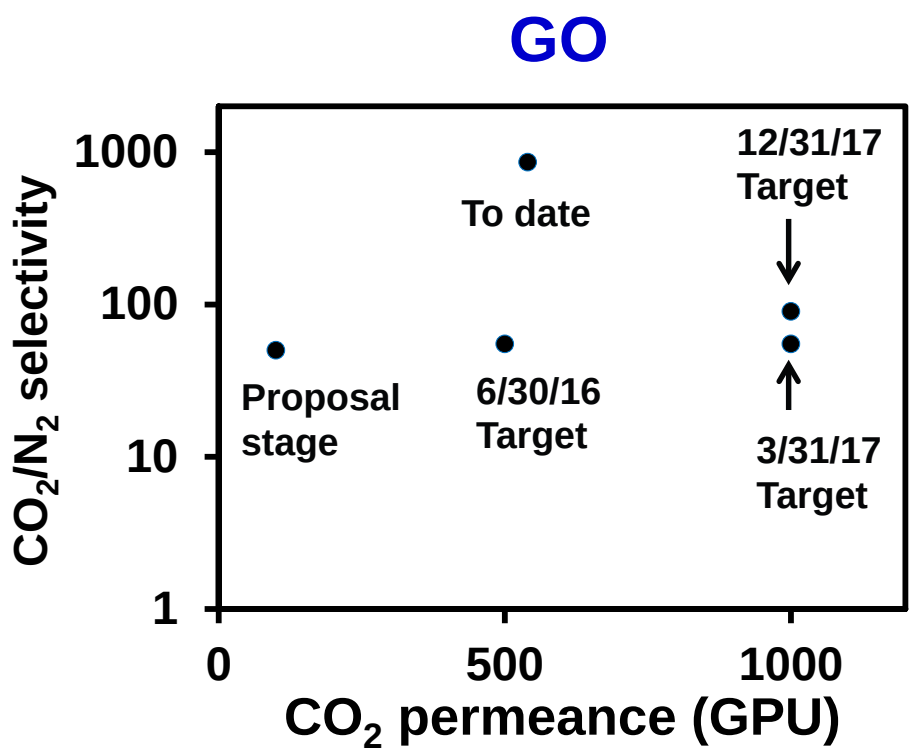

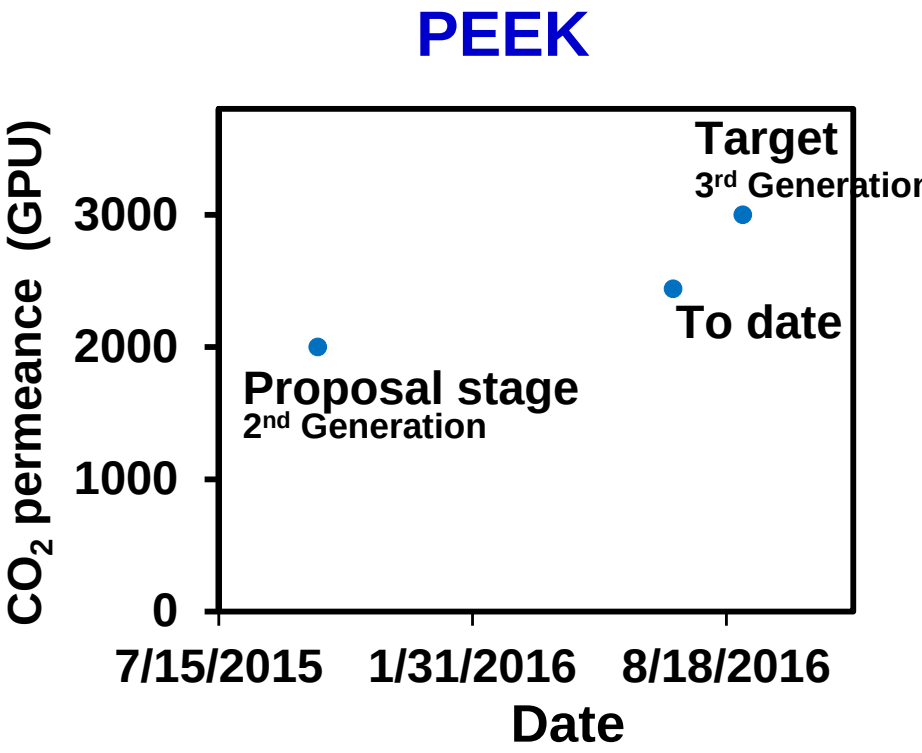

- **Integrated GO-PEEK** process tests to achieve technical goal

After the current project, steps can be taken to further reduce capture cost

- Increase CO_2 permeance for both GO and PEEK membranes
- Improve manufacture process to lower membrane costs
- Use advanced solvents instead of aMDEA
  - e.g. OASE Blue® currently used by Linde[1]
- Use novel process for solvent regeneration
  - e.g. gas pressurized stripping reported by Carbon Capture Scientific[2]
  - e.g. advanced flash regeneration by UT [3]

1: Krish R. Krishnamurthy, et al., 2015 NETL CO2 Capture Technology Meeting, June 23-26, 2015, Pittsburgh.
2: Scott Chen et al., Ibid
3. Gary Rochelle, 2016 NETL CO2 Capture Technology Meeting, August 8-12, 2016, Pittsburgh.

gti

Summary

- We are developing a novel CO_2 capture process combining a conventional gas membrane unit and a HFMC unit
- **GO membrane** developed to date
  - CO_2 permeance of 540 GPU and α_{CO_2/N_2} of 860 obtained at 80°C for a humidified CO_2/N_2 mixture
  - Superior performance to GO-based membranes reported in the literature
  - Selectivity higher than other CO_2/N_2 separation membranes
- **PEEK membrane** developed to date
  - Intrinsic CO_2 permeance of 2,500 GPU obtained
  - Mass transfer coefficient > 3.0 $(sec)^{-1}$ in capturing CO_2 from low CO_2-concentration feeds with aMDEA solvent

Acknowledgements

- **Financial support**

U.S. DEPARTMENT OF ENERGY

NETL NATIONAL ENERGY TECHNOLOGY LABORATORY

UNIVERSITY OF SOUTH CAROLINA

AIR LIQUIDE ADVANCED BUSINESS & TECHNOLOGIES ALaS

gti®

- **DOE NETL José Figueroa**