





---

# NETL Life Cycle Inventory Data

## Process Documentation File

---

CAP_FAC	<i>Capacity factor of BTL plant (dimensionless)</i>
NAPFLOW	<i>Production rate of naphtha, a co-product (barrels/day)</i>
CO2SEQFLOW	<i>Mass capture rate of CO<sub>2</sub> from BTL plant (ton/day)</i>
CO2FLOW	<i>CO<sub>2</sub> released to atmosphere from BTL plant (ton/day)</i>
STACK_OUT	<i>Volumetric flow rate of stack gas from BTL plant (ft<sup>3</sup>/hr)</i>
PROD_OUT	<i>Volumetric flow rate product gas from BTL plant (ft<sup>3</sup>/hr)</i>
SOLIDFLOW	<i>Mass flow rate of solid waste from BTL plant (lb/hr)</i>
H2OFLOW_IN	<i>Water input to BTL plant (L/MMBtu)</i>
H2OFLOW_OUT	<i>Water output from BTL plant (L/MMBtu)</i>
H2O_CCS	<i>Rate at which water use increases with addition of a CCS or CCS+ATR system (dimensionless)</i>

### Tracked Input Flows:

Switchgrass	<i>Switchgrass input to BTL plant</i>
-------------	---------------------------------------

### Tracked Output Flows:

FTD Produced	<i>1 kg of FTD production (the reference flow of this unit process)</i>
Naphtha Produced	<i>Mass of naphtha co-produced per kg of FTD production</i>
CO <sub>2</sub> sent to sequestration	<i>Mass of CO<sub>2</sub> captured for sequestration per kg of FTD production</i>



---

# NETL Life Cycle Inventory Data

## Process Documentation File

---

---

### Section II: Process Description

---

#### Associated Documentation

This unit process is composed of this document and the data sheet (DS) *DS\_Stage3\_O\_SG\_BTL\_2010.01.xls*, which provides additional details regarding relevant calculations, data quality, and references.


#### Goal and Scope

This unit process accounts for the operating activities for a BTL plant that uses switchgrass as a feedstock. The process is based on the reference flow of 1 kg of FTD production. The inputs to the process include water and switchgrass. Water is used for cooling and other process-related utilities; water is assumed to enter the boundaries of this unit process having no upstream resource consumption or environmental emissions. Switchgrass is a biomass feedstock that is converted to diesel via gasification followed by catalyzed synthesis; the resource consumption and emissions associated with the upstream production and delivery of switchgrass to the BTL plant are not included in the boundaries of this unit process, but are accounted for by upstream unit processes. The outputs of this unit process are FTD (the reference flow of this unit process), naphtha (a co-product of this unit process), water, air emissions, and water emissions.

#### Boundary and Description

This unit process models the production of diesel fuel via biomass gasification and FT synthesis. The energy inputs and outputs for this process were provided in the NETL coal and biomass to liquids (CBTL) Baseline Report (NETL 2009). This unit process describes activities that occur within Life Cycle (LC) Stage #3 of FTD production. The steps that precede this unit process include the production of biomass feedstocks in LC Stage #1, and the transport of biomass feedstocks in LC Stage #2. The step that immediately follows this unit process is the pipeline transport of FT diesel in LC Stage #4. **Figure 1** provides an overview of the boundary of this unit process. Rectangular boxes represent relevant sub-processes, while trapezoidal boxes indicate upstream data that are outside the boundary of this unit process. As shown, upstream resources and emissions associated with the production and delivery of biomass are accounted for outside the boundary of this unit process, while water is assumed to enter the boundary of the unit process with no upstream resources or emissions. The methods for calculating these operating activities are described below.

Figure 1: Unit Process Scope and Boundary

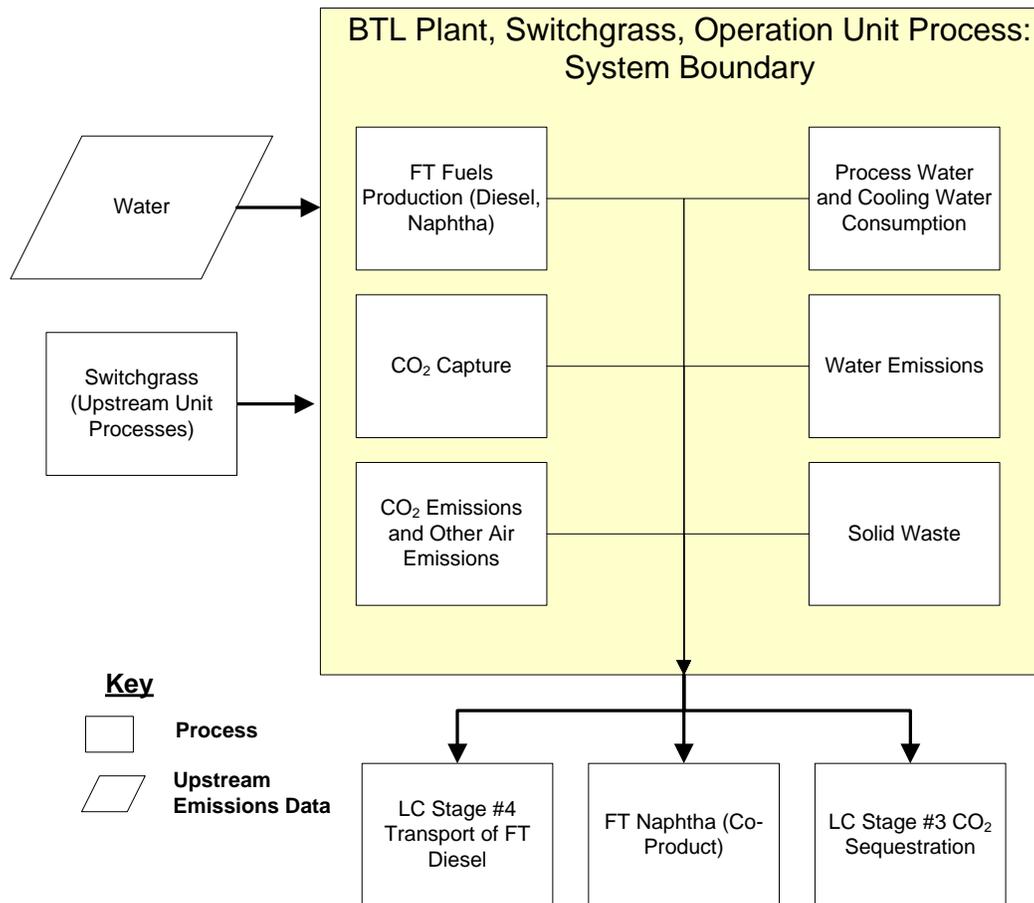

This unit process has 14 adjustable parameters, which enhance its versatility and allow the modeling of several scenarios. Unless noted otherwise, these adjustable parameters are based on data from the NETL baseline report on CBTL plants (NETL 2009). The default values for the adjustable parameters are shown in the DS for this unit process; cases in which a range in a default value is warranted are noted below. "BIOFEED" is an adjustable parameter based on NETL data for BTL plants (NETL 2009), and describes the rate at which the BTL plant consumes biomass feedstocks. "BIOPERCENT" is an adjustable parameter that describes the fraction of BTL feedstock that is biomass; it equals 1 for BTL plants, but other values for CBTL scenarios. "HHVBIO" is an adjustable parameter that describes the higher heating value of biomass feedstock; it is a necessary factor for the normalization of water use rates and stack flow rates, which are expressed on the basis of volume per MMBtu of feedstock input, to the production of one kilogram of FTD. "DIESELFLOW" is an adjustable parameter for the production rate of FTD and is based on NETL data for BTL plants (NETL 2009). "CAP\_FAC" is an adjustable parameter that describes the operating time of the BTL plant and allows an accurate translation between instantaneous and annual flows of the BTL plant; the default value for "CAP\_FAC" is 0.85 (i.e., 85 percent), which is specified in the baseline

document for this unit process (NETL 2009) and accounts for interruptions in biomass supply. "NAPFLOW" is an adjustable parameter that represents the mass of naphtha that is co-produced per kilogram of FTD production. "CO2SEQFLOW" and "CO2FLOW" are adjustable parameters that represent the mass of carbon dioxide (CO<sub>2</sub>) captured for sequestration and the mass of CO<sub>2</sub> released to the atmosphere, respectively. "STACK\_OUT" is an adjustable parameter that represents the volumetric flow rate of the stack gas and allows the calculation of sulfur oxides (SO<sub>x</sub>), nitrogen oxides (NO<sub>x</sub>), carbon monoxide (CO), and hydrogen chloride (HCl) emissions to air. "PROD\_OUT" is an adjustable parameter that represents the volumetric flow rate (in ft<sup>3</sup>/hr) of the gas stream that exits the gasifier and is used to calculate hydrogen sulfide (H<sub>2</sub>S) emissions from the BTL plant. "SOLIDFLOW" is an adjustable parameter that represents the mass of ash and other solid wastes from the BTL plant. "H2OFLOW\_IN" and "H2OFLOW\_OUT" are adjustable parameters that are based on NETL data for an integrated gasification combined cycle (IGCC) power facility (NETL 2007) and represent the water consumption of the BTL plant. Finally, "H2O\_CCS" is an adjustable parameter that represents the change in water input to the BTL plant when a CCS system is added; this change in water input is also based on the NETL data for an IGCC power facility (NETL 2007).

Naphtha is a co-product of FTD. This unit process does not use co-product allocation to apportion environmental burdens between FTD and naphtha. Rather, the mass of naphtha per production of one kilogram of FTD is shown as an output, and the recommended approach for co-product management is system expansion, wherein naphtha co-produced by BTL plants displaces naphtha produced by conventional routes. No life cycle data are available for the production of naphtha by conventional routes in the United States. Thus, for the life cycle of BTL fuels, NETL uses life cycle data for jet fuel to represent the conventional naphtha routes displaced by FT naphtha. That is, for every kilogram of FT naphtha that is produced by a BTL plant, one kilogram of jet fuel is displaced from the energy supply system. Alternatively, one could use the available GaBi profile for naphtha produced in the European Union. The displacement of conventional routes to naphtha production are outside the scope of this unit process; only the mass of naphtha co-produced per unit of FT diesel production is shown in this unit process.

The NETL CBTL baseline (NETL 2009) provides data for CO<sub>2</sub> emissions, H<sub>2</sub>S emissions, and slag (solid waste) output. All other impacts were determined by other sources. An LCA study on poplar short rotation woody crop (SRWC) gasification was used to characterize SO<sub>x</sub>, CO, and HCl emissions (Carpentieri 2005); it is assumed that these emissions do not change significantly with changes in the type of biomass feedstock. Carpentieri (2005) also provides NO<sub>x</sub> emission data, but does not provide sufficient information on the extent of environmental controls used to manage NO<sub>x</sub> emissions. Thus, NO<sub>x</sub> emissions were calculated using environmental targets outlined in the NETL baseline report on fossil energy plants (NETL 2007), which includes data for an IGCC with bituminous coal as a feedstock. The NO<sub>x</sub> emissions data for the IGCC plant (NETL

2007) were adjusted downward because co-firing with biomass has been shown to reduce NO<sub>x</sub> emissions (Tillman 2000).

Particulate matter (PM) emissions from BTL plants were also estimated from the baseline data for IGCC plants (NETL 2007). This unit process assumes that the BTL plant produces negligible mercury (Hg) emissions; this assumption is supported by a study that shows that Hg in biomass is on the scale of parts per billion (Friedli 2003). Similarly, based on the composition of the BTL feedstock and the extent to which the gas streams of a BTL plant are cleaned, ammonia (NH<sub>3</sub>) and lead (Pb) emissions were assumed to be negligible. Because no combustion processes are considered (e.g., no auxiliary boilers or other units are used for onsite energy generation), no other combustion-related emissions are calculated. Air emissions are considered a limitation due to the lack of specific data for BTL plants.

Water use was not given in the NETL CBTL baseline report. An environmental impact statement (EIS) on a smaller CTL plant was used as a data source for water input, consumption, and discharge (DOE 2007). This is noted as a data limitation because the BTL cases have slightly lower gasifier output temperatures and therefore would probably require less water; however, no BTL-specific water use data was available. Water increases due to CCS addition were based on the percent increase reported in the NETL baseline report on fossil energy plants (NETL 2007). This, too, is noted as a data limitation, as no distinction was made between water use increases with CCS and CCS +ATR. Emissions to water were determined based on the calculated water output and effluent water quality data from an IGCC plant (NETL 2002). Water emissions that were calculated as 0.1 parts per million (ppm) or greater were included in the water quality data for this unit process. This includes the waterborne emission of NH<sub>3</sub>, cyanide (CN<sup>-</sup>), nickel (Ni), selenium (Se), and zinc as significant water outputs. Both the water quantity and quality data are considered data limitations.

Solid waste is dominated by ash created during gasification, which is given in the NETL CBTL baseline report. Additionally, the FT process uses an iron catalyst that would contribute to solid waste as it degrades and is replaced. Data on FT catalyst productivity and loss (degradation) rate was taken from a NREL report of FT production of mixed alcohols from biomass (Phillips *et al.* 2007). When calculated, the loss of catalyst was less than 0.01 percent compared to slag output, and was therefore considered insignificant.

Properties of BTL plants that use switchgrass as a feedstock are shown in **Table 1**. **Table 2** provides a summary of modeled input and output flows. Additional details regarding input and output flows, including calculation methods, are contained in the associated DS.

**Table 1: Properties of Switchgrass BTL Plants (NETL 2009)**

<b>Property (at 100% capacity)</b>	<b>5,000 BPD BTL, switchgrass</b>	<b>5,000 BPD BTL w/ CCS, switchgrass</b>	<b>5,000 BPD BTL w/ CCS + ATR, switchgrass</b>
Diesel Output (tonne/day)	463	464	464
Naphtha Output (tonne/day)	158	157	157
Biomass Input (tonne/day)	3,705	3,752	3,946
Biomass HHV (MJ/kg)	16.9	16.9	16.9
CO2 Capture (tonne CO2e/day)	0	3,466	4,085
CO2 Emissions (tonne/day)	3,761	449	147
Solid Waste Flow (tonne/day)	222	225	236

Table 2: Unit Process Input and Output Flows

Flow Name*	5,000 BPD BTL, switchgrass	5,000 BPD BTL w/ CCS, switchgrass	5,000 BPD BTL w/ CCS + ATR, switchgrass	Units (Per Reference Flow)
<b>Inputs</b>				
Water (unspecified) [Water]	34.7	37.6	39.6	kg
Switchgrass	8.00	8.08	8.50	kg
<b>Outputs</b>				
Fischer-Tropsch diesel (FTD)	1	1	1	kg
Naphtha (NETL) [Organic intermediate products]	0.340	0.337	0.338	kg
Carbon dioxide [Inorganic intermediate products]	0.0	7.5	8.8	kg
Water (returned to receiving body) [Water]	14.5	15.7	16.5	kg
Carbon dioxide [Inorganic emissions to air]	6.90	0.82	0.27	kg
Nitrogen dioxide [Inorganic emissions to air]	3.31E-05	4.07E-05	3.30E-05	kg
Sulphur dioxide [Inorganic emissions to air]	3.71E-05	4.55E-05	3.69E-05	kg
Particulate Matter, unspecified [Other emissions to air]	4.12E-04	4.16E-04	4.38E-04	kg
Hydrogen Sulfide [Other emissions to air]	2.29E-07	2.70E-07	2.52E-07	kg
Carbon monoxide [inorganic emissions to air]	5.29E-07	6.51E-07	5.28E-07	kg
Hydrogen chloride [inorganic emissions to air]	3.62E-04	4.45E-04	3.61E-04	kg
Ammonium / ammonia [Inorganic emissions to fresh water]	1.28E-04	1.38E-04	1.46E-04	kg
Cyanide [Inorganic emissions to fresh water]	2.09E-06	2.26E-06	2.38E-06	kg
Nickel (+II) [Heavy metals to fresh water]	1.65E-06	1.79E-06	1.89E-06	kg
Selenium [Heavy metals to fresh water]	2.00E-06	2.17E-06	2.28E-06	kg
Zinc (+II) [Heavy metals to fresh water]	1.98E-06	2.14E-06	2.26E-06	kg
Solid Waste (unspecified) [Solid Waste]	4.07E-01	4.11E-01	4.33E-01	kg

\* **Bold face** clarifies that the value shown *does not* include upstream environmental flows.

### Embedded Unit Processes

None.

## References

- Carpentieri *et al.* 2005  
Carpentieri, M., Corti, A., Lombardi, L., 2005. *Life cycle assessment (LCA) of an integrated biomass gasification combined cycle (IBGCC) with CO<sub>2</sub> removal*. Energy Conversion and Management 46:1790-1808.  
[http://www.sciencedirect.com/science?\\_ob=Image&\\_imagekey=B6V2P-4DXB86Y-3-1&\\_cdi=5708&\\_user=2638189&\\_orig=search&\\_coverDate=07%2F01%2F2005&\\_sk=999539988&view=c&wchp=dGLbVIW-zSkzk&md5=9de9d8ed2399fcd4f37324b44282f5a3&ie=/sdarticle.pdf](http://www.sciencedirect.com/science?_ob=Image&_imagekey=B6V2P-4DXB86Y-3-1&_cdi=5708&_user=2638189&_orig=search&_coverDate=07%2F01%2F2005&_sk=999539988&view=c&wchp=dGLbVIW-zSkzk&md5=9de9d8ed2399fcd4f37324b44282f5a3&ie=/sdarticle.pdf) (accessed December 17, 2009).
- DOE 2007  
DOE, 2007. *Final Environmental Impact Statement for the Gilberton Coal-to-Clean Fuels and Power Project*. U.S. Department of Energy. DOE/EIS-0357.  
<http://www.gc.energy.gov/NEPA/finalEIS-0357.htm> (accessed December 17, 2009).
- Friedli 2003  
Friedli, H.R., *et al.*, 2003. *Mercury emissions from burning of biomass from temperate North American forests: laboratory and airborne measurements*. Atmospheric Environment 37:253-267.
- NETL 2002  
NETL, 2002. *Major Environmental Aspects of Gasification-Based Power Generation Technologies*. U.S. Department of Energy, Office of Fossil Energy, National Energy Technology Laboratory.  
<http://www.netl.doe.gov/technologies/coalpower/gasification/pubs/pdf/final%20env.pdf> (accessed December 17, 2009).
- NETL 2007  
NETL, 2007. *Cost and Performance Baseline for Fossil Energy Plants – Volume 1: Bituminous Coal and Natural Gas to Electricity Final Report*. U.S. Department of Energy, National Energy Technology Laboratory.

Pittsburgh, PA. DOE/NETL-2007/1281.  
[http://www.netl.doe.gov/energy-analyses/baseline\\_studies.html](http://www.netl.doe.gov/energy-analyses/baseline_studies.html) (accessed December 17, 2009).

NETL 2009

NETL, 2009. *Affordable, Low-Carbon Diesel Fuel from Domestic Coal and Biomass*. U.S. Department of Energy, National Energy Technology Laboratory. Pittsburgh, PA. DOE/NETL-2009/1349. January 14, 2009.

Phillips *et al.* 2007

Phillips, S., et al., 2007. *Thermochemical Ethanol via Indirect Gasification and Mixed Alcohol Synthesis of Lignocellulosic Biomass*. National Renewable Energy Laboratory, Golden, CO. NREL/TP-501-41168.  
<http://www.nrel.gov/docs/fy07osti/41168.pdf> (accessed December 17, 2009).

Tillman 2000

Tillman, D.A., 2000. "Biomass cofiring: the technology, the experience, the combustion consequences." *Biomass and Bioenergy* 19:365-384.  
[http://www.sciencedirect.com/science?\\_ob=Mgr&\\_imagekey=B6V22-41TN69H-2-58&\\_cdi=5690&\\_user=2638189&\\_orig=search&\\_coverDate=12%2F31%2F2000&\\_sk=999809993&view=c&wchp=dGLzVtb-](http://www.sciencedirect.com/science?_ob=Mgr&_imagekey=B6V22-41TN69H-2-58&_cdi=5690&_user=2638189&_orig=search&_coverDate=12%2F31%2F2000&_sk=999809993&view=c&wchp=dGLzVtb-)

---

### Section III: Document Control Information

---

**Date Created:** February 5, 2010

**Point of Contact:** Timothy Skone (NETL), [Timothy.Skone@NETL.DOE.GOV](mailto:Timothy.Skone@NETL.DOE.GOV)

**Revision History:**

Original/no revisions

**How to Cite This Document:** This document should be cited as:

NETL (2010). *NETL Life Cycle Inventory Data – Unit Process: BTL Plant Operation with Switchgrass Feed*. U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: February 2010 (version 01). [www.netl.doe.gov/energy-analyses](http://www.netl.doe.gov/energy-analyses) (<http://www.netl.doe.gov/energy-analyses>)

---

---

**Section IV: Disclaimer**

---

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.