



2024

SENSORS, CONTROLS, AND OTHER NOVEL CONCEPTS



PROJECT PORTFOLIO



U.S. DEPARTMENT OF
ENERGY



NATIONAL
ENERGY
TECHNOLOGY
LABORATORY

DISCLAIMER

This project was funded by the United States Department of Energy, National Energy Technology Laboratory, in part, through a site support contract. Neither the United States Government nor any agency thereof, nor any of their employees, nor the support contractor, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

CONTENTS

INTRODUCTION	5
Sensors, Controls, and Other Novel Concepts	7
ADVANCED CONTROLS AND CYBER PHYSICAL SYSTEMS	8
National Energy Technology Laboratory: Cyber-Physical Systems as an Integrated Energy System Development Tool	9
National Energy Technology Laboratory: Demonstration of Online System Identification and Adaptive Controls for Improved Systems Flexibility	10
National Energy Technology Laboratory: Hybrid R&D Power System Data Management and Retrieval Systems to Demonstrate Intelligent Sensors	11
Strategic Power Systems, Inc. (SPS): Continued Development - Real Time and Physics Based Data Analytics for Thermal Power Plants.....	12
University of Texas at El Paso: 5G Integrated Edge Computing Platform for Efficient Component Monitoring in Coal-Fired Power Plants.....	13
University of Texas at El Paso (UTEP): 5G-Time Sensitive Networking Architecture Capable of Providing Real-Time Situational Awareness to Fossil-Energy (FE) Generation Systems.....	14
West Virginia University Research Corporation: Boiler Health Monitoring using a Hybrid First Principles-Artificial Intelligence Model.....	15
HARSH ENVIRONMENT SENSORS	16
Clemson University: Test and Validate Distributed Coaxial Cable Sensors for In Situ Condition Monitoring of Coal-Fired Boiler Tubes	17
Clemson University: Additive Manufacturing of Circumferentially Embedded Optical Sensor Modules for In Situ Monitoring of Coal-Fueled Steam Turbines.....	18
Lehigh University: Integration of LIBs with Machine Learning for Real-Time Monitoring of Feedstock in H ₂ Gasification Applications	19
Michigan State University: High-Accuracy and High-Stability Fiber-Optic Temperature Sensors for Coal Fired Advanced Energy Systems	20
Morgan State University: Ceramic-Based Ultra-High Temperature Thermocouples in Harsh Environments.....	21
National Energy Technology Laboratory: Development of Functional Sensor Materials and Cladding for Fuel Gas Sensing.....	22
National Energy Technology Laboratory: Application of Distributed Temperature Measurement with Optical Fiber	23

National Energy Technology Laboratory: Raman Gas Analyzer Field Testing	24
National Energy Technology Laboratory: Ultrafast Laser Measurements for Harsh Energy System Environments.....	25
National Energy Technology Laboratory: Development of LIBS for Subterranean Chemical Sensing.....	26
Ohio University: Enabling the Next Generation of Smart Sensors in Coal Fired Power Plants Using Cellular 5G Technology.....	27
University of Maryland: Robust Heat-Flux Sensors for Coal-Fired Boiler Extreme Environments	28
University of Massachusetts: Wireless High Temperature Sensor Network for Boiler Systems	29
University of Pittsburgh: Distributed Sensors for Waste Plastics Gasification and Clean Hydrogen Production.....	30
West Virginia University: Advanced Manufacturing of Ceramic Anchors with Embedded Sensors for Process and Health Monitoring of Coal Boilers.....	31
West Virginia University: An Autonomous Robotic Inspection System for Coal Ash and Tailings Storage Facilities.....	32
West Virginia University Research Corporation: Passive Wireless Sensors for Realtime Temperature and Corrosion Monitoring of Coal Boiler Components Under Flexible Operation	33
OTHER NOVEL CONCEPTS	34
Duke University: Characterization of Arsenic and Selenium in Coal Fly Ash to Improve Evaluations for Disposal and Reuse Potential	35
National Energy Technology Laboratory: Magnetohydrodynamic Channel Testing and Simulation	36
National Energy Technology Laboratory: Artificial Intelligence-Based Theoretical Approach for Screening and Design of Functional Materials for the Harsh Environment Applications.....	37
National Energy Technology Laboratory: Quantum Sensing for FECM Applications	38
Oklahoma State University: Towards AI-Enabled Autonomy of Robotic Inspection Platforms for Sustainability of Energy Infrastructure	39
University of California - Riverside: Harnessing Quantum Information Science for Enhancing Sensors in Harsh Fossil Energy Environments.....	40
University of Texas at El Paso: Ultra-Low Disorder Graphene Quantum Dot-Based Spin Qubits for Cyber Secure Fossil Energy Infrastructure	41
Abbreviations	42
Contacts.....	43

INTRODUCTION

As part of the U.S. Department of Energy (DOE) Office of Fossil Energy's Hydrogen with Carbon Management (HCM) program, National Energy Technology Laboratory (NETL) research focuses on carbon-neutral hydrogen (i.e., coupled to carbon capture and storage (CCS)) as a fuel and developments technologies to use carbon-neutral hydrogen from any source.

The HCM program's efforts are promoted by the Department of Energy's Hydrogen Shot, with a goal of reducing clean hydrogen costs by 80% to \$1 per 1 kilogram within 1 decade (1-1-1) while expanding employment of the U.S. energy workforce. Seeking a cost-competitive decarbonized alternative to traditional fossil fuels, HCM has a research and development portfolio consisting of a new generation of carbon neutral or net-negative greenhouse gas emissions technologies. HCM comprises six subprogram activities: (1) Gasification Systems, (2) Advanced Turbines, (3) Reversible Solid Oxide Fuel Cells, (4) Advanced Energy Materials, (5) Sensors, Controls, and Other Novel Concepts, and (6) Simulation-Based Engineering.

In combination, these investments in innovation, informed by private-sector stakeholders, enable more comprehensive risk assessment and techno-economic analysis, increase the resiliency of the nation's energy infrastructure, and enable the adoption of cutting-edge data harnessing technologies for plant owners and operators.

Gasification Systems: The DOE Gasification Systems program is developing innovative modular designs for converting diverse types of carbonaceous feedstocks into clean synthesis gas to enable the low-cost production of clean hydrogen, electricity, transportation fuels, chemicals, and other useful products to suit market needs. Advancements in this area will help enable syngas-based technologies to play a role in economy-wide decarbonization in multiple energy sectors while remaining competitive in both domestic and international markets, and spur on the use of abundant domestic carbon feedstock resources, in turn contributing towards increased energy security and promoting justice through reviving depressed markets in traditional coal-producing regions of the United States.

Advanced Turbines: The NETL Advanced Turbines Program is focused on the development of advanced turbine technologies that will accelerate turbine performance, efficiency, and cost effectiveness beyond current state-of-the-art. The program will provide tangible benefits to the public in the form of options for eliminating CO₂ emissions, lowering cost of electricity, and reducing emissions of criteria pollutants. The efficiency of combustion turbines has steadily increased as advanced technologies have provided manufacturers with the ability to produce highly advanced turbines that operate at very high temperatures. Further increases in efficiency are possible through the continued development of advanced components, combustion technologies, material systems, thermal management, and novel turbine-based cycles. The Advanced Turbines Program supports four key technologies that will advance clean, low-cost power production from fossil energy resources while providing options for CO₂ mitigation. These key technologies include: (1) Advanced Combustion Turbines, (2) Pressure Gain Combustion, (3) Turbomachinery for Supercritical Carbon Dioxide Power Cycles, and (4) Modular Turbine-Based Hybrid Heat Engines. DOE's research and development in advanced turbines technology develops and facilitates low-cost advanced energy options for carbon-negative energy ecosystems.

Reversible Solid Oxide Fuel Cells: The NETL Reversible Solid Oxide Fuel Cell program maintains a portfolio of RD&D projects that address the technical issues facing the commercialization of solid-oxide fuel cell (SOFC) and Reversible Solid Oxide Fuel Cell (R-SOFC) technologies and pilot-scale test projects intended to validate the solutions to those issues. To successfully complete the maturation of these technologies from their present state to the point of commercial readiness, the program's efforts are channeled through three key technology areas, each of which has its respective research focus: (1) Cell Development, (2) Core Technology, and (3) Systems Development.

Advanced Energy Materials: The Advanced Energy Materials program drives to characterize, produce, and certify advanced alloys and high-performance materials that are key to realizing dispatchable, reliable, high-efficiency decarbonized power generation from hydrogen. In addition, the program aims to encourage change and stimulate innovation in the high-performance materials value chain to spur U.S. competitiveness and enable achievement of 2050 zero-emission goals. Materials of interest include those that enable components and equipment to perform in the high-temperature, high-pressure, corrosive environments of advanced energy systems with specific emphasis on durability, availability, and cost. The key focus areas of this program include (1) development of a robust domestic materials supply chain, (2) lifetime prediction and rapid repair critical to manage a flexible fleet of generators that enable high penetration of renewables into the grid, and (3) low-cost, high performance alloy development to enable meeting 2050 zero-emission goals.

Sensors, Controls, and Other Novel Concepts: The NETL Sensors, Controls, and Novel Concepts program conducts research and development for technologies that will provide pivotal insights into optimizing performance, reliability, and availability of integrated energy and carbon management systems. NETL develops, tests, and matures novel sensor and control technologies that are operable in next-generation energy systems, including hybrid plants incorporating components such as hydrogen-powered turbines and fuel cells, renewables, and energy storage applications. These sensors enable responsiveness to varying conditions in real time, maintaining high efficiencies and reducing emissions. This research will aid in the achievement of DOE goals which include net-zero carbon emissions in the energy sector by 2035 and a decarbonized wider economy by 2050.

Simulation-Based Engineering: NETL's Simulation-Based Engineering (SBE) program supports the development and application of innovative physics- and chemistry-based models and computational tools at multiple scales (i.e., atomistic, device, process, grid, and market) in order to accelerate development and deployment of clean, advanced fossil fuel technologies. The SBE program combines a multidisciplinary approach comprising technical knowledge, software development, computational power, data repositories, experimental facilities, and unique partnerships to support research into timely and accurate solutions for fossil and sustainable energy and carbon management systems. Analysis and visualization tools are manipulated to gain scientific insights into complex, uncertain, high-dimensional, and high-volume datasets. The information generated is then collected, processed, and used to inform research that combines theory, computational modeling, advanced optimization, physical experiments, and industrial input.

SENSORS, CONTROLS, AND OTHER NOVEL CONCEPTS

The Sensors, Controls, and Other Novel Concepts program enables and enhances carbon management technologies ranging from hydrogen fuel production and power generation to post-combustion carbon capture. Crosscutting research optimizes sensor arrays, enabling the optimization of parameters such as temperature, pressure, fluid composition, and the state of materials. Researchers investigate a range of advanced manufacturing techniques (e.g., 3D printing) to determine the feasibility of embedding sensors coupled with condition-based monitoring algorithms to operate in extreme environments, helping anticipate maintenance needs and reducing plant downtime. The information apprises operators of component health and performance in real time. Robots, ranging from drones to crawlers, have transformed the inspection and repair of equipment for a wide variety of systems. These advances in remote inspection are improving performance, reliability, and economics for future energy infrastructure.

Controls research at NETL enables optimized performance under increased energy system complexity. Optimized controls will reduce emissions including carbon dioxide and methane while ensuring safe and efficient performance. Smart control systems enable an optimal balance between operational performance and reliability. Advanced controls will also manage complex interactions of hybrid power systems (featuring renewable generation, energy storage, carbon management, etc.) and other subsystems. These control technologies within integrated systems will help facilitate carbon emissions reductions.

Novel technologies are being developed to support energy applications that will prove essential to an equitable, clean energy future. These activities start with emergent technologies such as quantum sensors, visible light communications, and direct power extraction, move through technology maturation, and transition to the marketplace. These efforts are complemented with cybersecurity projects including blockchain and distributed ledger technology.

The Sensors and Controls project portfolio is categorized into the following research areas:

- Harsh Environment Sensors
- Advanced Controls and Cyber Physical Systems
- Other Novel Concepts

This research will aid in the achievement of DOE's goal to achieve net-zero carbon emissions in the energy sector by 2035 and a decarbonized wider economy by 2050.

ADVANCED CONTROLS AND CYBER PHYSICAL SYSTEMS


National Energy Technology Laboratory: Cyber-Physical Systems as an Integrated Energy System Development Tool.....	9
National Energy Technology Laboratory: Demonstration of Online System Identification and Adaptive Controls for Improved Systems Flexibility	10
National Energy Technology Laboratory: Hybrid R&D Power System Data Management and Retrieval Systems to Demonstrate Intelligent Sensors	11
Strategic Power Systems, Inc. (SPS) Continued Development - Real Time and Physics Based Data Analytics for Thermal Power Plants.....	12
University of Texas at El Paso: 5G Integrated Edge Computing Platform for Efficient Component Monitoring in Coal-Fired Power Plants	13
University of Texas at El Paso (UTEP): 5G-Time Sensitive Networking Architecture Capable of Providing Real-Time Situational Awareness to Fossil-Energy (FE) Generation Systems	14
West Virginia University Research Corporation: Boiler Health Monitoring using a Hybrid First Principles-Artificial Intelligence Model	15

Cyber-Physical Systems as an Integrated Energy System Development Tool

Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 52
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 281,000
Technology Area	Plant Optimization Technologies

This task aims to establish a new technology development paradigm incorporating cyber-physical systems (CPS) to reduce both cost and risk, potentially accelerating technology development in the energy sector. It will clearly define the CPS design methodology, which has been informally applied in the lab's Hyper project for over a decade.

CPS are used to accelerate development of system components represented as real-time models while the remainder of the system is physical. They are also used to advance conceptual design of hybrid systems, including H₂ production and utilization, thermal management, and carbon management, and to prove the operability of conceptual designs.

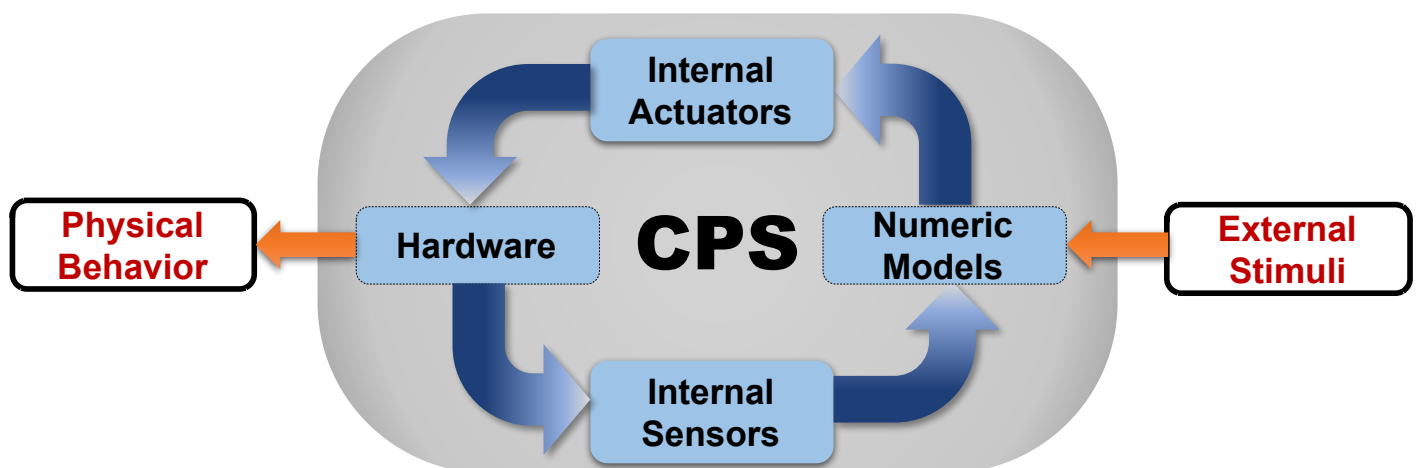

Cyber physical systems are used to replace physical components that (1) are irreplaceable, (2) are expensive, (3) are unable to meet performance targets, and/or (4) don't yet exist.

Demonstration of Online System Identification and Adaptive Controls for Improved Systems Flexibility

Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 53
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 55,000
Collaborator	Ames Lab
Technology Area	Plant Optimization Technologies

This task will mature the use of online system identification that will eventually be harnessed and automated for adaptive control. The team will develop tools and methodologies to assist in improving dynamic performance of flexible power systems and optimizing carbon management systems.

The team is identifying various control regimes for use by an industrial partner to identify control states for improved controller tuning. In a preliminary analysis, the team developed a multi-layered analysis scheme that includes intermediate and final process responses, disturbances, and manipulated parameters.

Hybrid R&D Power System Data Management and Retrieval Systems to Demonstrate Intelligent Sensors

Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 54
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 129,000
Technology Area	Plant Optimization Technologies

This task will install, set up, and configure a data historian for the Hyper facility capable of compiling and synchronizing all experimental and computational data, metadata, and paradata (i.e., why data was taken, or the test conducted) for cyber-physical experiments conducted in NETL's Advanced


System Integration laboratory facilities. The team will develop a roadmap with cooperation from other components of the NETL organization including, but not limited to, Information Technology (IT) and Engineering.

Continued Development - Real Time and Physics Based Data Analytics for Thermal Power Plants

Performer	Strategic Power Systems, Inc. (SPS)
Award Number	FE0032035
Project Duration	06/11/2021 – 06/10/2025
Total Project Value	\$ 812,807
Technology Area	Plant Optimization Technologies

The primary objective of this work is to extend the previous research results beyond the proof-of-concept phase. This will include verification and validation testing with direct support and collaboration from operating power plants with advanced power generation technologies and prime mover and downstream systems using the near-real-time data provided through the SPS Operational Reliability Analysis Program (ORAP[®]) and ORAP Asset Insight data system. The

project will result in real measurable value, better informed plant operators, and reduced disruptions, while meeting changing service demands based on enhanced operating flexibility. Extending prior research results to plant systems requires additional time and effort to develop an integration strategy for integrating research results into the SPS ORAP Asset Insight data system. This will enable live, real-time testing and integration with power plant operators.

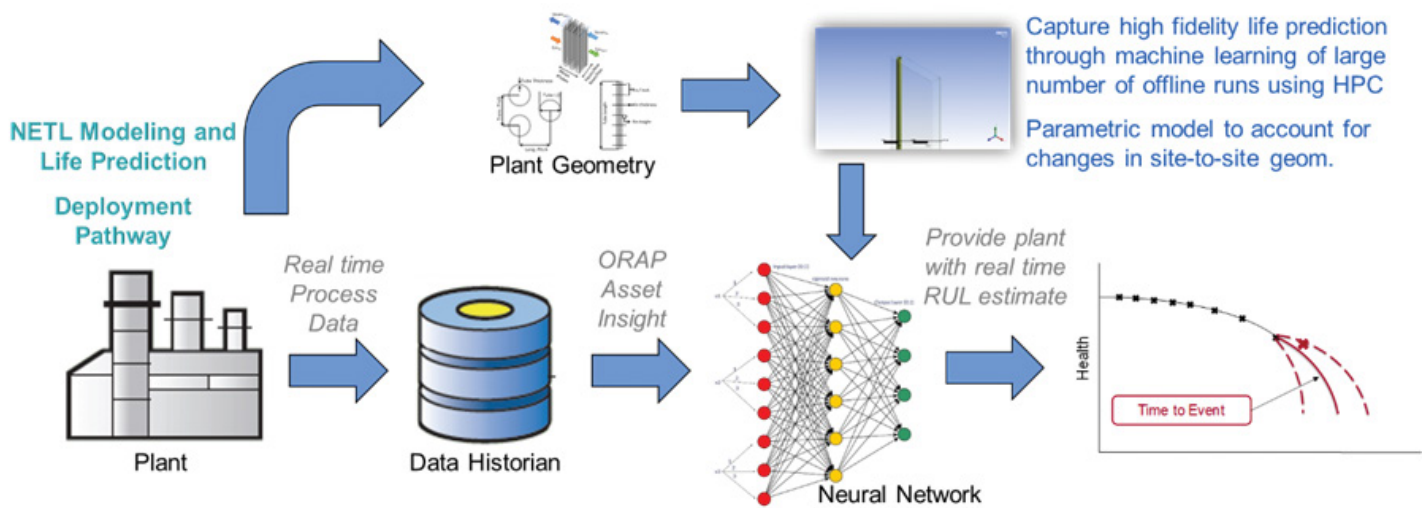

5G Integrated Edge Computing Platform for Efficient Component Monitoring in Coal-Fired Power Plants

Performer	University of Texas at El Paso
Award Number	FE0032089
Project Duration	08/23/2021 – 08/22/2024
Total Project Value	\$ 812,807
Technology Area	University Training and Research

The goal of this project is to develop a 5G integrated distributed edge computing (DEC) framework that facilitates real-time monitoring of critical components in coal-fired power plants (CFPPs). The objectives of the proposed effort are as follows:

(1) Distributed Edge Computing Service Orchestration for CFPP Component Monitoring—Develop an on-demand DEC platform to gather, process, and efficiently analyze the component health data in the CFPPs. Given that edge computing servers are closer to the field devices in modernized power plants, the efficiency of DEC services with respect to dynamic orchestration, resource data collection, and health information monitoring will be investigated for timely detection of remote faults and to perform diagnosis.


(2) Deploy and Integrate 5G Networking to Enable QoS (Quality of Service)-Aware Network Slicing—Leverage software-defined networking and network function virtualization mechanisms of 5G to instantiate a logically separated component monitoring network slice that will be integrated with DEC services for time-sensitive and efficient transfer of CFPP component health data.

(3) Prototype Development and Empirical Evaluation—Develop a customizable 5G-capable DEC prototype with a separate network slice for efficient plant component monitoring. In addition, extensive performance evaluation of the developed platform will be conducted by measuring several critical metrics.

Since traditional component monitoring in CFPP is done manually using costly portable testing equipment, it is a very time-consuming and labor-intensive maintenance process. Thus, integration of 5G-enabled sensor communication with edge computing infrastructure will be able to monitor the health of components in a CFPP in real time and in an automated

manner using machine learning capabilities. The proposed 5G integrated DEC framework will facilitate plant operators in conducting real-time monitoring of critical components in CFPPs. Furthermore, the 5G-based communication infrastructure will allow orchestration of on-demand network slices in order to dynamically meet the component monitoring data throughput and quality of service requirements. This R&D will produce a working prototype using 5G-compliant sensors, remote terminal units, and supervisory control and data acquisition (SCADA) servers.

This technology could be used to monitor the health of components of any power plant in real time, allowing for quicker detection and replacement of worn components with reduced downtime and a reduced need for manual monitoring. This will allow plant operators to dynamically instantiate and manage the QoS needs of the component monitoring traffic in real time. This platform would inherently enhance resiliency of the SCADA network because of the network slicing functionality.

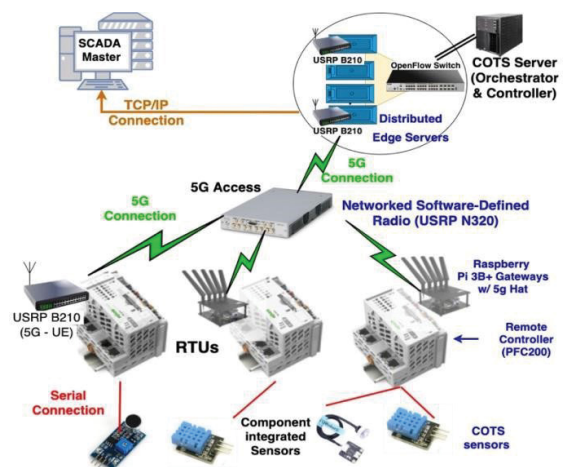

5G Capable Edge Computing Testbed for Component Monitoring.

5G-Time Sensitive Networking Architecture Capable of Providing Real-Time Situational Awareness to Fossil-Energy (FE) Generation Systems


Performer	University of Texas at El Paso (UTEP)
Award Number	FE0032090
Project Duration	09/23/2021 – 09/22/2024
Total Project Value	\$ 400,000
Technology Area	University Training and Research

The overall goal of the proposed effort is the delivery of an integrated fifth-generation time-sensitive networking architecture (5G-TSN) capable of supporting coal-fired power generation systems' operational data while providing the required quality of service. Requirements formulation and design will be based on a thorough network performance and emitted electromagnetic interference (EMI) characterization of the University of Texas at El Paso's Center for Space Exploration and Technology Research pressurized oxy-coal combustion system and the high-pressure oxy-natural-gas combustor. Recorded data and EMI profiles will then be played back into an end-to-end simulation of the 5G-TSN network. The proposed research will demonstrate the ability to design a 5G-TSN network capable of providing the necessary quality of service and security for measurement and control of oxy-coal and oxy-natural gas combustor systems.

The UTEP team will advance this technology by simulating end-to-end live combustor data through a 5G-TSN network. The goal will be fulfilled by the following specific objectives:

(i) operational characterization of the pressurized oxy-coal combustion system, (ii) 5G-TSN integration Requirements and conceptual design, and (iii) end-to-end simulation of oxy-coal combustion SCADA onto 5G-TSN ontology.

As power plants evolve, the ability to monitor them in real time is critical to increasing their efficiency and minimizing downtime due to maintenance and repairs. Fifth-generation sensor networks can give operators a way to monitor equipment that would otherwise need to be shut down for inspection and proactive response to maintenance issues. This research aims to characterize and deliver a novel 5G-TSN architecture capable of critical control and real-time measurement. The proposed design will be validated not only through industry-standard simulation but through the characterization of a pilot-scale oxy-coal combustor system during the course of this project. The introduction of a physical system to an otherwise simulated environment paves the way to practical implementation of 5G-TSN networks.

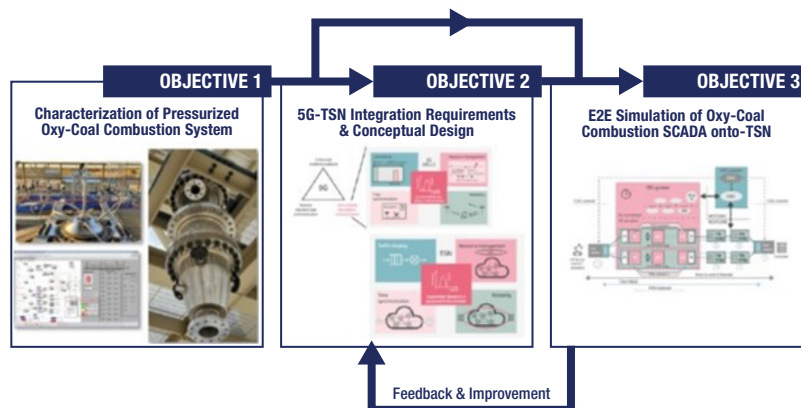

Schematic flow chart showing the over-arching objectives of the project.


Boiler Health Monitoring using a Hybrid First Principles-Artificial Intelligence Model

Performer	West Virginia University Research Corporation
Award Number	FE0031768
Project Duration	09/01/2019 – 08/31/2024
Total Project Value	\$ 2,509,016
Collaborators	Electric Power Research Institute, Inc.; Southern Company Services, Inc.
Technology Area	Coal Utilization Science

This project seeks to develop methodologies and algorithms to accomplish (i) a hybrid first principles-AI model of the pulverized coal boiler, (ii) a physics-based approach to material damage informed by ex-service component evaluation, (iii) a transformative, online health-monitoring framework that synergistically leverages the hybrid model and plant measurements to provide the spatial and temporal profile of key transport variables and characteristic measures for plant health, and (iv) a field implementation and demonstration at Southern Company's Plant Barry

in Bucks, Alabama. The methodologies and algorithms developed in this project will be calibrated and validated using data from Plant Barry. The framework will also be deployed at Plant Barry and evaluated for online monitoring of boiler health.

The Electric Power Research Institute, a sub-awardee, will provide real-world operation and material damage inputs to the hybrid creep and thermo-mechanical fatigue damage models.

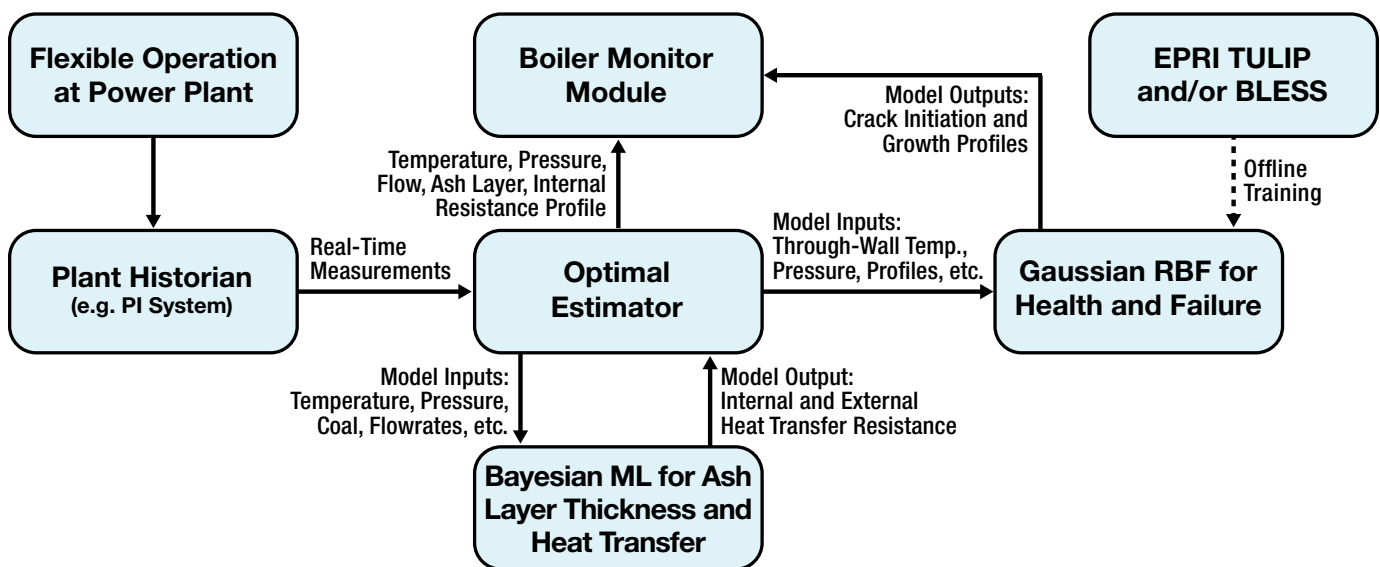

Hybrid model-based boiler health monitoring framework.

HARSH ENVIRONMENT SENSORS

Clemson University:

Test and Validate Distributed Coaxial Cable Sensors for In Situ Condition Monitoring of Coal-Fired Boiler Tubes 17

Clemson University:

Additive Manufacturing of Circumferentially Embedded Optical Sensor Modules for In Situ Monitoring of Coal-Fueled Steam Turbines..... 18

Lehigh University:

Integration of LIBs with Machine Learning for Real-Time Monitoring of Feedstock in H₂ Gasification Applications..... 19

Michigan State University:

High-Accuracy and High-Stability Fiber-Optic Temperature Sensors for Coal Fired Advanced Energy Systems..... 20

Morgan State University:

Ceramic-Based Ultra-High Temperature Thermocouples in Harsh Environments..... 21

National Energy Technology Laboratory:

Development of Functional Sensor Materials and Cladding for Fuel Gas Sensing..... 22

National Energy Technology Laboratory:

Application of Distributed Temperature Measurement with Optical Fiber..... 23

National Energy Technology Laboratory:

Raman Gas Analyzer Field Testing 24

National Energy Technology Laboratory:

Ultrafast Laser Measurements for Harsh Energy System Environments 25

National Energy Technology Laboratory:

Development of LIBS for Subterranean Chemical Sensing..... 26

Ohio University:

Enabling the Next Generation of Smart Sensors in Coal Fired Power Plants Using Cellular 5G Technology 27

University of Maryland:

Robust Heat-Flux Sensors for Coal-Fired Boiler Extreme Environments..... 28

University of Massachusetts:

Wireless High Temperature Sensor Network for Boiler Systems 29

University of Pittsburgh:

Distributed Sensors for Waste Plastics Gasification and Clean Hydrogen Production..... 30

West Virginia University:

Advanced Manufacturing of Ceramic Anchors with Embedded Sensors for Process and Health Monitoring of Coal Boilers 31

West Virginia University:

An Autonomous Robotic Inspection System for Coal Ash and Tailings Storage Facilities..... 32

West Virginia University Research Corporation:


Passive Wireless Sensors for Realtime Temperature and Corrosion Monitoring of Coal Boiler Components Under Flexible Operation 33

Test and Validate Distributed Coaxial Cable Sensors for In Situ Condition Monitoring of Coal-Fired Boiler Tubes

Performer	Clemson University
Award Number	FE0031765
Project Duration	10/01/2019 – 06/30/2024
Total Project Value	\$ 3,750,000
Technology Area	Plant Optimization Technologies

The objective of this project is to test, validate, and advance the technology readiness level (from TRL5 to TRL7) of a novel low-cost distributed stainless-steel/ceramic coaxial cable sensing (SSC-CCS) technology for in situ monitoring of the boiler tube temperature in existing coal-fired power plants. The novel SSC-CCS sensing technology and associated condition-based monitoring (CBM) software to be demonstrated in this project could lead to improved understanding of the boiler tube failure mechanisms and a prognostic system to improve the overall performance, reliability, and flexibility of the nation's coal-fired powerplant fleet. The new SSC-CCS sensing technology and the associated CBM package could provide the essential capability to enhance boiler reliability by predicting and preventing failures, maximizing the availability,

improving generating capacity/flexibility, and saving on maintenance cost. The novel SSC-CCS sensors and instrumentation have the combined advantages of low-cost implementation, proven robustness, easy installation, and distributed monitoring capability to reduce overall deployment and operating cost. The project could have profound impacts on the general field of harsh environment sensing as it fosters a number of technological breakthroughs that may offer solutions to other sensing and control needs in existing and next-generation power and fuel systems. This technology could become an important enabling factor for the U.S. energy industry to achieve the challenging goals of enhanced efficiency, reduced emissions, and improved reliability.

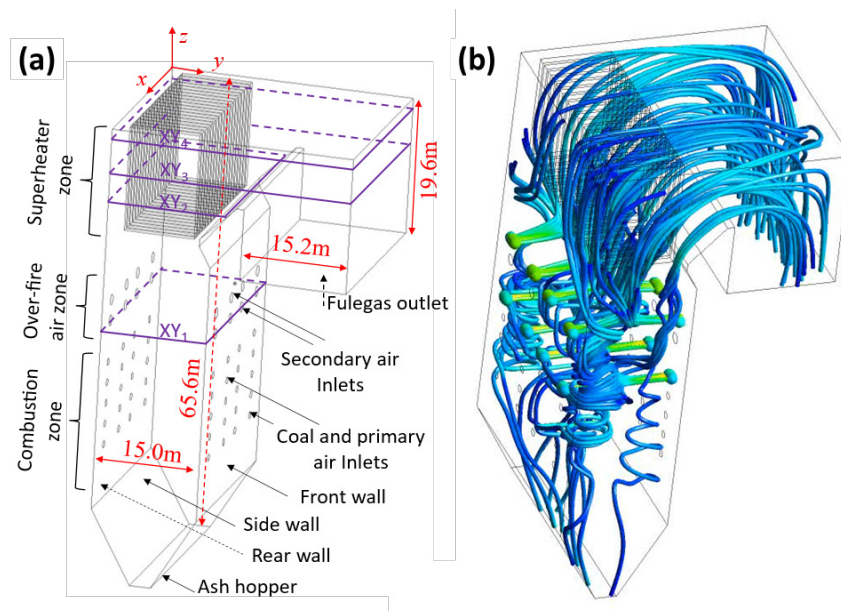

(a) CFD model of a coal-fired boiler
 (b) CFD simulation result of the air flow inside the boiler.


Additive Manufacturing of Circumferentially Embedded Optical Sensor Modules for In Situ Monitoring of Coal-Fueled Steam Turbines

Performer	Clemson University
Award Number	FE0031826
Project Duration	01/01/2020 – 12/31/2024
Total Project Value	\$ 1,250,000
Collaborator	General Electric
Technology Area	Plant Optimization Technologies

The main objective of this project is to design, develop, additively manufacture, test, and validate three types (temperature, pressure, and blade tip timing/clearance) of optical sensor modules for in-situ monitoring of the critical operational parameters in coal-fueled steam turbines. These sensor modules will be embedded into the Smart Ring (recently invented and patented by GE) and installed circumferentially and flush into the inner wall of the turbine casing for condition-based monitoring and control and maintenance scheduling. The optical sensor modules will be optimally designed based on simulations, and additively manufactured using the novel Integrated Additive and

Subtractive Manufacturing (IASM) method developed at Clemson University. The sensor-embedded Smart Ring will be tested and validated under laboratory-simulated conditions as well as demonstrated in industrial-scale turbine testing rigs at GE's turbine testing facilities.

As power plant designs extend the limits of materials into higher temperature and pressure regimes to gain efficiency, turbine blade creep becomes a key issue. The sensors developed in this project will help to monitor blade creep and correlate it to operating conditions, thereby enabling condition-based control and maintenance scheduling, and contributing to extended turbine lifetime.

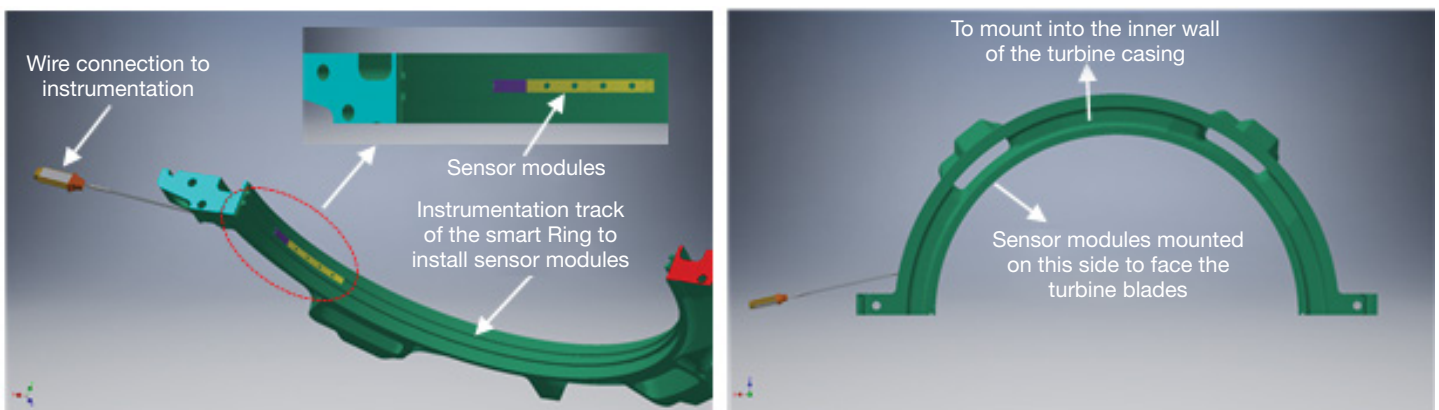

Prototype of field measurement optical system design.


Integration of LIBs with Machine Learning for Real-Time Monitoring of Feedstock in H₂ Gasification Applications

Performer	Lehigh University
Award Number	FE0032177
Project Duration	10/01/2022 – 09/30/2025
Total Project Value	\$ 625,000
Technology Area	Plant Optimization Technologies

This project will focus on assembling a material inventory that includes mixed waste plastics, biomass, and legacy coal wastes, and develop a procedure for sample processing, analysis, chain of custody, and quality assurance. The Recipient will design and assemble a laser-induced breakdown spectroscopy (LIBS) system for detection and quantification of material samples under both static and dynamic conditions (e.g., material flow on a small-scale research conveyor belt) and optimize this measurement technique to develop an analytical database. Machine learning algorithms for LIBS data processing will be utilized to provide improvement in measurement accuracy of the proposed LIBS technique for parameters of interest and throughput corresponding to on-line measurements, reducing future feedstock sampling, and analysis requirements. A techno-economic analysis of the proposed technology will be performed to assess the benefit of incorporating the proposed system on upgraded operational protocols and control schemes of gasifiers for hydrogen production.

This project will target characterization of waste plastics that would typically go to landfills, in combination with biomass and legacy coal waste, as a feedstock to hydrogen conversion reactors. Landfilling is often the cheapest way to dispose of municipal and industrial wastes. However, landfilling leads to significant environmental problems. This project eliminates these hazards by measuring, in real time and in-situ, the feedstock's chemistry and higher-order parameters so that a gasifier can efficiently and economically use them while producing hydrogen, an environmentally benign fuel. Real-time hydrogen gasifier feedstock analysis would benefit from the features of this combined LIBS and Machine learning

approach via a smaller footprint, fast analysis frequency, competitive measurement accuracy and precision, relatively easy calibration, and less time and labor intensity. Machine learning would also be able to provide information on higher-order parameters of the feedstock, such as heating value, fusion and slagging temperatures, and thermal conductivity, through classification and clustering methods which will link sample elemental information to those properties of interest in the sample.

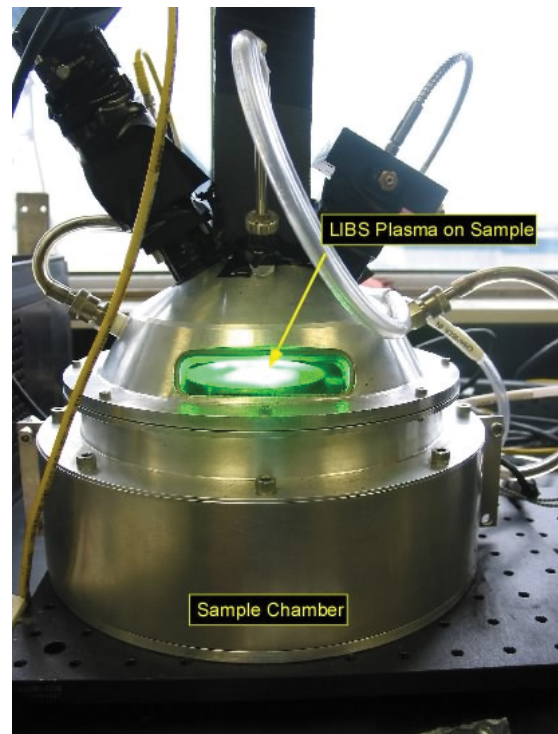


LIBS system with labels.

High-Accuracy and High-Stability Fiber-Optic Temperature Sensors for Coal Fired Advanced Energy Systems

Performer	Michigan State University
Award Number	FE0031899
Project Duration	09/01/2020 – 08/31/2023
Total Project Value	\$ 496,475
Technology Area	University Training and Research

The objective of this project is to develop a revolutionary gas-based fiber-optic temperature sensor technology with the required accuracy and long-term stability for temperature control and condition monitoring of the next generation of coal-fired power systems. The temperature sensor technology is based on a Fabry-Perot (FP) cavity filled with a gas (e.g., air) the pressure of which can be changed. An FP cavity is formed by a silica tube that is filled with air and sandwiched between a side-hole fiber and a capping fiber. The holey fiber has air channels in its cladding running along the length of the fiber through which the air pressure in the FP cavity can be tuned. The light coming from the holey fiber is partially reflected at the two fiber/tube interfaces and coupled back into the holey fiber. The system then measures the reflection spectrum which contains the interference fringes of the FP cavity by a white-light source, a fiber-optic coupler, and a spectrometer.

Accurately controlling the temperature is critical for the reliable and efficient operation of future highly efficient coal-fired energy systems. An accurate temperature sensor with long-term operating reliability is key for temperature control. Temperature is also a critical parameter for condition monitoring and lifetime prediction of energy systems. However, the extreme conditions present in advanced energy systems often lead to accelerated degradation in the performance and lifetime of current sensors. Most sensors used today show unacceptable drift and require frequent calibration or replacement, often leading to costly power plant shut down. The movement toward advanced energy systems requires that new temperature sensors be developed which can maintain accuracy and long-term stability comparable to or even better than low-temperature sensors over extended periods of operation under extreme conditions.

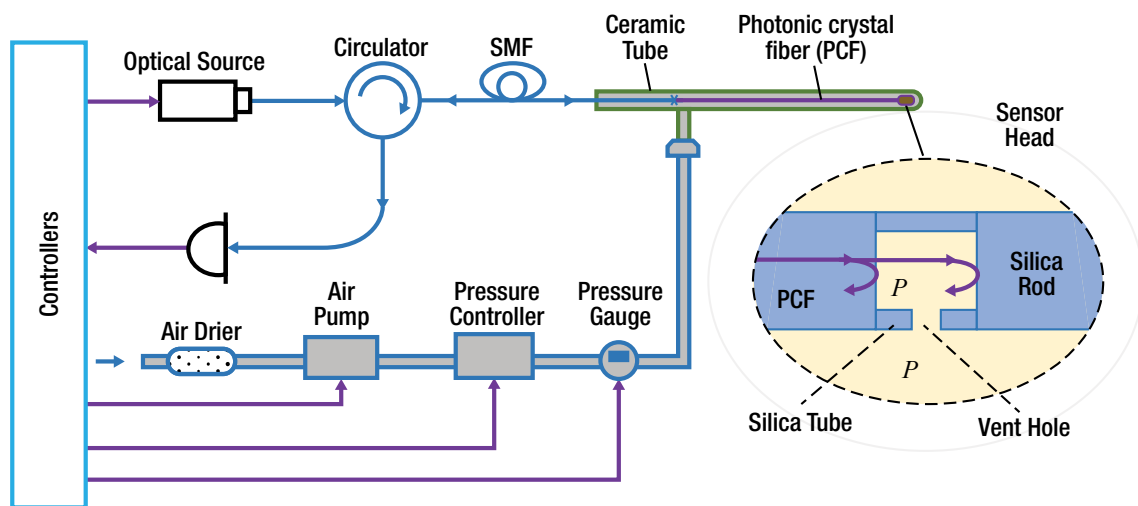

Developed a temperature sensor system that can operate at a temperature level above 1000 °C with accuracy and long-term stability comparable to the sensors of low-temperature version.


Ceramic-Based Ultra-High Temperature Thermocouples in Harsh Environments

Performer	Morgan State University
Award Number	FE0031906
Project Duration	08/01/2020 – 07/31/2023
Total Project Value	\$ 500,000
Technology Area	Plant Optimization Technologies

Researchers will develop novel, durable, low-cost ceramic-based super-high-temperature thermocouples (up to 2000 °C) for use in high-temperature (750–1800 °C) and 1000 psi and above coal-based energy systems under high corrosion and erosion conditions. The materials, zirconium diboride (ZrB_2) and samarium hexaboride (SmB_6) thermoelectric refractory materials, will be employed as n- and p-type thermocouple legs. The materials will be compacted into isotropic thermoelectric nanocomposites as thermocouple legs with excellent Seebeck coefficient. The legs will be fabricated into ceramic-based thermocouples with p-n junctions. The thermocouples will also have good oxidization and sulfidization resistance, require no protective outer layer, and cost less than acoustic and optical devices. Thermocouple performance will be evaluated in oxygen, carbon oxides, and sulfide atmospheres at high pressure

and temperature. In addition, the effects of heat flow, flow rate, and mass flux found in coal power generation on the performance of the thermocouples will be investigated. Physical behaviors and long-term stability will be evaluated.

Accurate and reliable temperature measurements and controls are essential to operating coal-based energy systems at high efficiency and optimal performance. However, present thermosensors, utilizing expensive acoustic and optical techniques, usually do not work well under such harsh conditions. Development and application of new kinds of thermocouples are essential elements for low-cost maintenance and long-term stable thermosensing devices. The proposed ceramic-based super-high-temperature thermocouples will lead to the development of low-cost thermosensors and significant reduction in maintenance costs.

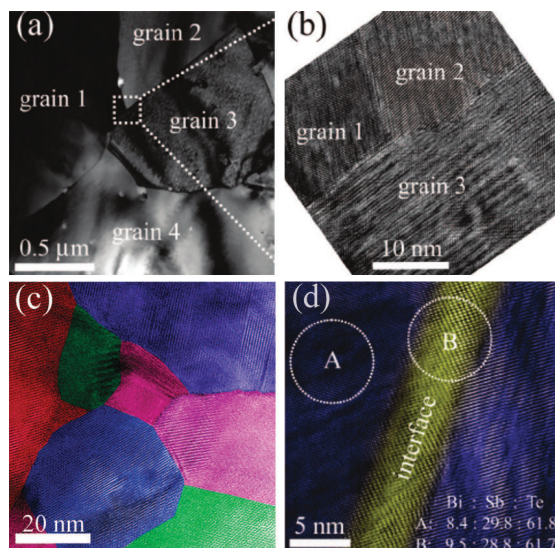


TEM images of ball-milled/hot-pressed p-type $(Bi, Sb)_2Te_3$ nanocomposites. (a) BF-TEM at low magnification. (b-c) HRTEM of nanograins. (d) HRTEM of a grain boundary.

Development of Functional Sensor Materials and Cladding for Fuel Gas Sensing


Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Tasks 22 and 24
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 450,000
Technology Area	Plant Optimization Technologies

These tasks will develop materials and methods for spatially resolved optical fiber-based sensing under harsh conditions (>800 °C). Task 22 will produce new fiber-optic hydrogen sensor devices that provide single-point or distributed measurements with improved durability, responsivity, and selectivity to characterize hydrogen distributions currently inaccessible by other technologies. Task 24 will develop

an economical fabrication process for durable optically clad single-crystal sapphire fiber as well as a distributed interrogator for such fiber, enabling the combined fiber-sensing system to make measurements in the world's most difficult and challenging harsh environments. This system will out-perform silica fiber sensor systems and will operate in environments that quickly degrade silica fiber sensors.

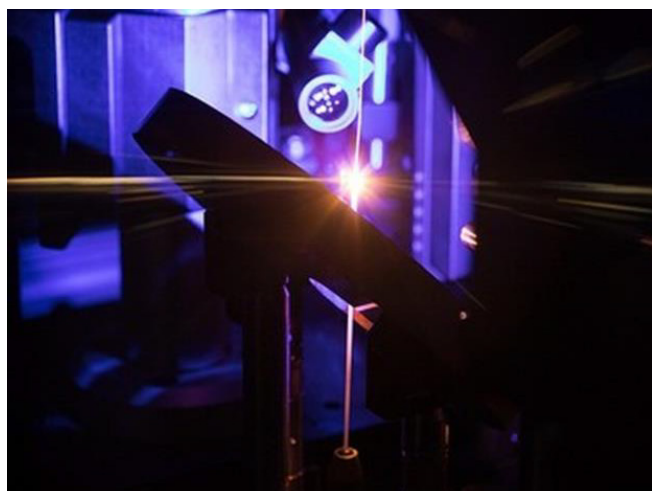

NETL laser-heated pedestal growth #1 grows single-crystal fiber at over 2000 °C.

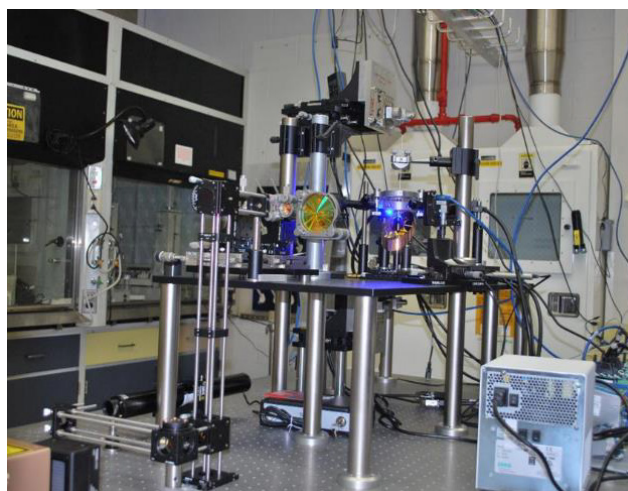


NETL's #2 laser-heated pedestal growth system for fiber regrowth and cladding.

Application of Distributed Temperature Measurement with Optical Fiber



Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 32
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 91,000
Technology Area	Plant Optimization Technologies

In this task, the team will apply distributed temperature measurement with optical fiber in FECM applications. The team will also continue to apply optical fiber temperature measurements in microwave reactors (NETL Reaction Analysis and Chemical Transformation [ReACT] Laboratory) to support an NETL-RIC key laboratory initiative developing new technology for low-carbon production of ammonia

(a liquid form of hydrogen storage) or other chemical conversions such as microwave-assisted gasification for hydrogen production. Temperature measurement in microwave reactors has been a challenge without the ability to use metal thermocouples, and improving the spatial resolution capabilities of fiber temperature sensors is a priority.

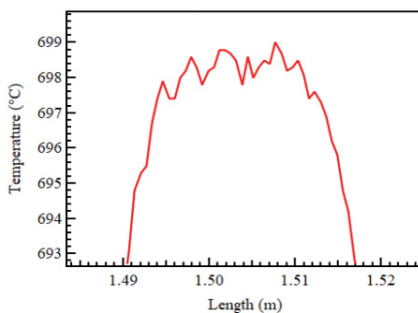

Fiber test in Plate Heater (plates heated to 701°C per TC readings)

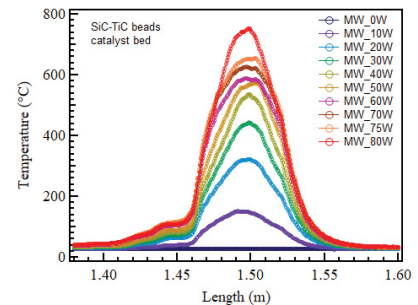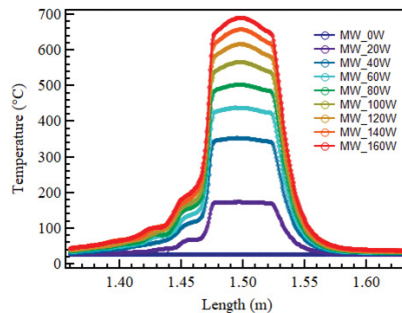

Raman Gas Analyzer Field Testing


Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 41
Project Duration	04/01/2020 – 03/31/2024
Total Project Value	\$ 133,000
Technology Area	Plant Optimization Technologies

Laser-based and other advanced laboratory diagnostics can be adapted to fossil energy research problems to provide non-contact sensing capabilities in harsh process environments, or to provide next-generation measurement capability for process control. Work on this project supports the field testing and improvement of the NETL-developed Raman gas analyzer (RGA), a next-generation technology for real-time composition analysis of fuel gases and other process gases. The RGA measures concentration of hydrogen, methane, ethane, and propane, as well as other common industrial gases (CO, CO₂, N₂, O₂, H₂O). It provides a new enabling technology for faster, smarter process control based on the chemical composition of the gases in the process, including improved fuel flexibility and efficiency for power generation systems.

The RGA applies Raman spectroscopy, a laboratory technique for non-destructive material analysis which has had great success previously with liquids and solids, to gases with an ingenious optical configuration which increases the signal more than 1000 times above that of the conventional approach. As a result, the composition of a gas mixture (such as natural gas or syngas) can be measured much faster than with conventional commercial technology; that is, fast enough to allow the method to be a powerful instrument to support process control. Field testing with commercial partners is the next step for technology readiness level advancement and market acceptance of the new technology. Test experience will also be used to improve the RGA to better meet the needs of end-use applications.



Raman gas analyzer field prototype.

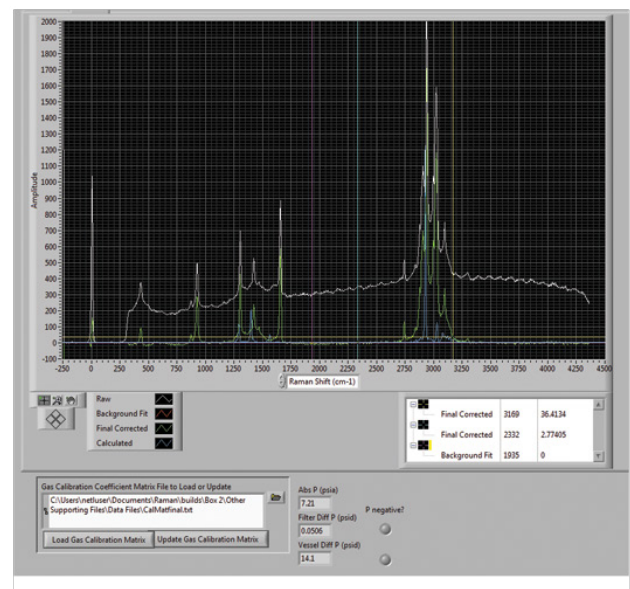


Example of Raman spectra from gas in real-time analysis.

Ultrafast Laser Measurements for Harsh Energy System Environments

Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 48
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 102,000
Technology Area	Plant Optimization Technologies

This team will design a pulsed Raman system for spatially resolved measurements in gasifiers or other large industrial systems such as biomass, waste plastic, municipal solid waste, hydrogen or hydrogen-blend fired boiler, heat recovery steam generator (HRSG), or other harsh environment industrial process. This type of technology

exists using tunable diode laser absorption spectroscopy, but it requires a grid of measurements with multiple entrance and exit ports and provides very coarse spatial resolution (tens of meters). The approach proposed here would require fewer measurement ports into the boiler and is expected to provide higher spatial resolution.

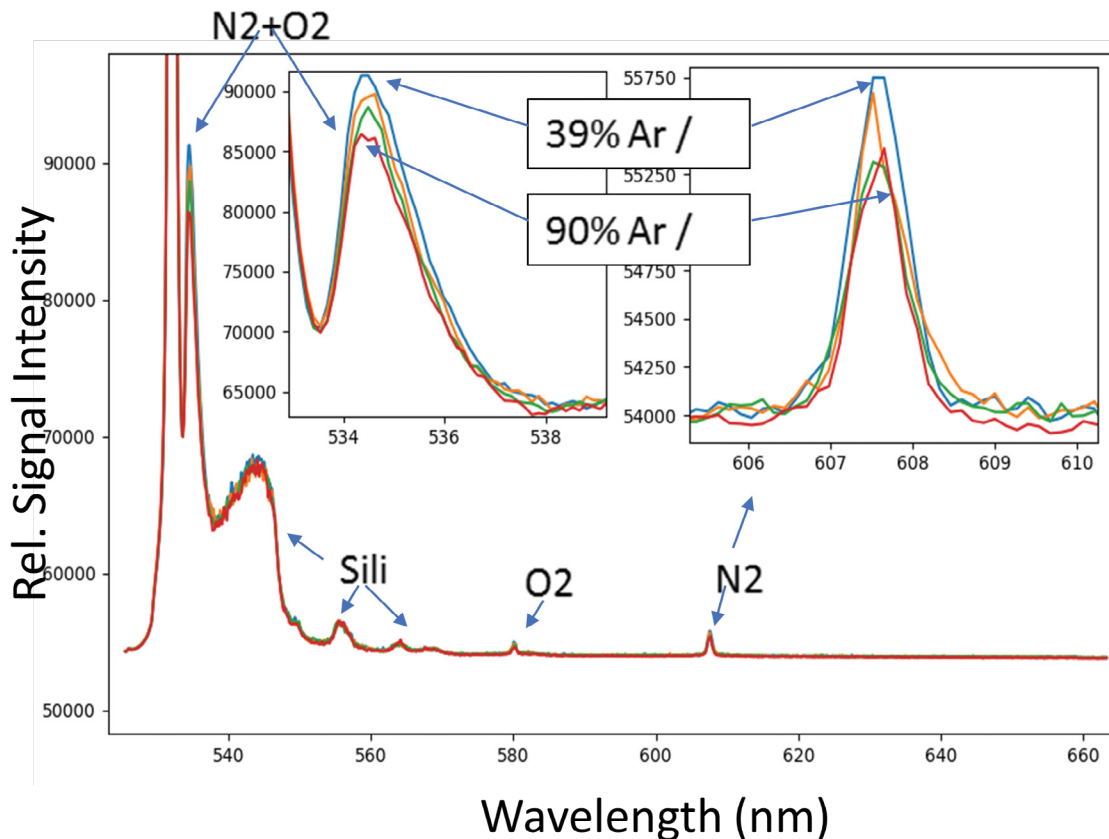


Laser-based measurement of species/temperature along a line of sight.

Development of LIBS for Subterranean Chemical Sensing

Performer	National Energy Technology Laboratory
Award Number	FWP-1022427 Task 71
Project Duration	04/01/2021 – 03/31/2024
Total Project Value	\$ 208,000
Technology Area	Plant Optimization Technologies

This task pursues the development, optimization, and testing of a deployable miniaturized laser induced breakdown spectroscopy (LIBS) system for subterranean chemical sensing. Subtasks involve design improvements of the

split system with submersible probe based on field testing. Raman measurement will be added through an SBIR award to MetroLaser Inc.

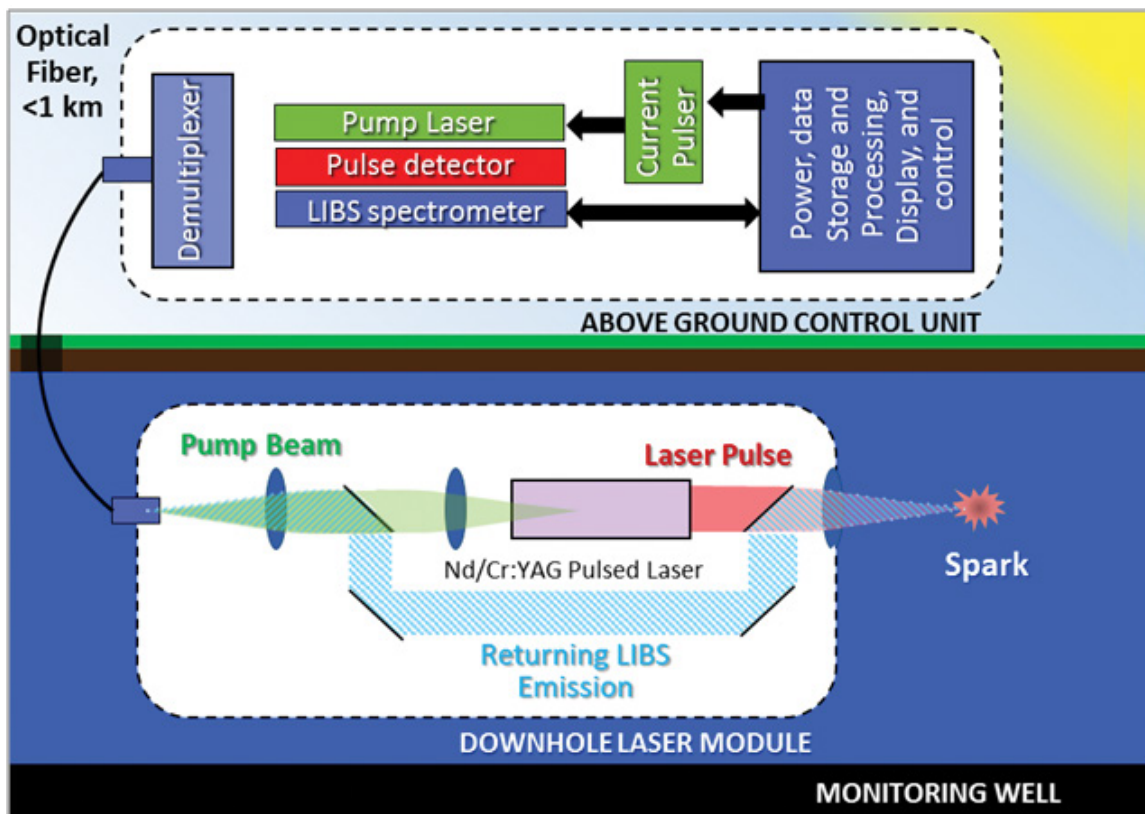

Split system design.

Enabling the Next Generation of Smart Sensors in Coal Fired Power Plants Using Cellular 5G Technology

Performer	Ohio University
Award Number	FE0032078
Project Duration	08/16/2021 – 08/15/2024
Collaborator	West Virginia University (WVU)
Total Project Value	\$ 414,481
Technology Area	University Training and Research


This project will build upon existing experience with cellular based systems, power plant water quality sensing, and high-temperature sensors developed during past projects. The main objective of this project is to demonstrate the effectiveness of 5G cellular embedded, cloud, and edge computing-based sensors specific to coal-fired power plant needs where harsh, noisy RF conditions are encountered. Sensors that utilize 5G for data communications are the first logical step in revolutionizing wireless connectivity that will enable robust operations in coal-fired power plants. Working together, Ohio University and WVU will focus on a high-priority in-situ boiler temperature measurement system that relies on chipless RFID technology and much-needed temperature, pressure, environmental, and water quality industrial sensors.

The specific project objectives are (1) investigate specific needs of interfacing and data collection of identified sensing areas of significance within coal-fired power plants that would immediately benefit from 5G wireless data communications, (2) enable 5G data communication for 'peel-and-stick' chipless RFID-based boiler temperature and corrosion sensors, (3) demonstrate effectiveness and performance of 5G enabled Internet-of-Things (IoT) sensors used in coal-fired power plants, (4) investigate sensor-driven deep learning/artificial intelligence using laboratory conditions that simulate power plants for system health monitoring, and (5) determine the limits of 5G systems in harsh environments—hot, humid, and cold.

The duty cycle style of power plant operation combined with a need to lower operating costs has left several components

of coal-fired power plants vulnerable to unscheduled maintenance. More advanced, intelligent, inexpensive, and simple-to-install monitoring equipment based on wireless data transfers will support the current and future coal power plant needs. Right now, coal power plant operators could greatly benefit from retrofitting of existing sensors and additional sensor and control systems throughout. In addition, the intelligent health monitoring capabilities that occur at the sensor (embedded computing) or base station (edge computing) will give operators more prediction tools about scheduling maintenance.

Graduate students at both universities will be employed and trained on our respective technologies and will cross-collaborate to exchange information and gather laboratory results.

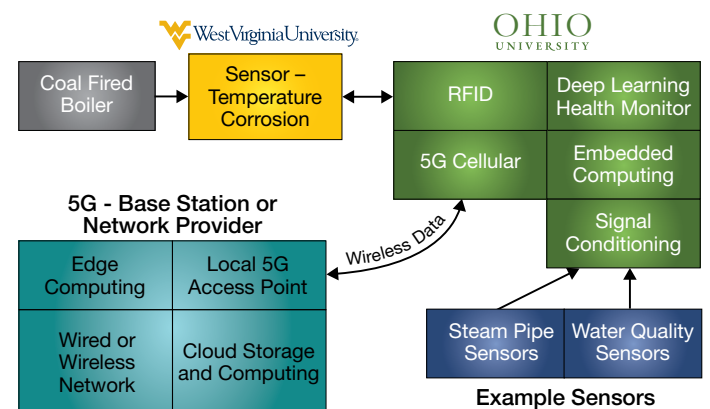

Proposed system integration – identifying contributions.


Robust Heat-Flux Sensors for Coal-Fired Boiler Extreme Environments

Performer	University of Maryland
Award Number	FE0031902
Project Duration	01/01/2021 – 12/31/2024
Total Project Value	\$ 500,000
Technology Area	Plant Optimization Technologies

Researchers will develop robust heat flux sensor elements, based on the wire-wound Schmidt Boelter gauge architecture and the transverse Seebeck effect, capable of operating in the challenging high-temperature, corrosive environments within the boilers of coal-fired power plants. The heat-flux sensors will utilize thermoelectric effects to directly transduce the heat-flux input to analog electrical voltage signals, will be constructed from dedicated materials that can withstand oxidative atmospheres at temperatures from 700 to 1200 °C, and will maintain adequate performance under these conditions for prolonged periods. Rigorous testing and calibration protocols in furnaces and medium-scale fire research facilities will be employed to understand the significance and reliability of the output signal under a range

of dynamic environmental conditions. These conditions will include a range of heat-flux values, temperatures, surface emissivity, cooling rates, flow rates, and concentrations of carbon particulates.

If successful, the project will help extend the power industry's real-time heat-flux sensing capabilities to a challenging regime of extreme environments, offering new opportunities to understand the mechanisms by which operational parameters affect the power generation efficiency. Furthermore, adverse effects of overheating, uneven burner operation and deposition of soot and slag can be detected and remediated before experiencing irreversible damages that could lead to shutdown.

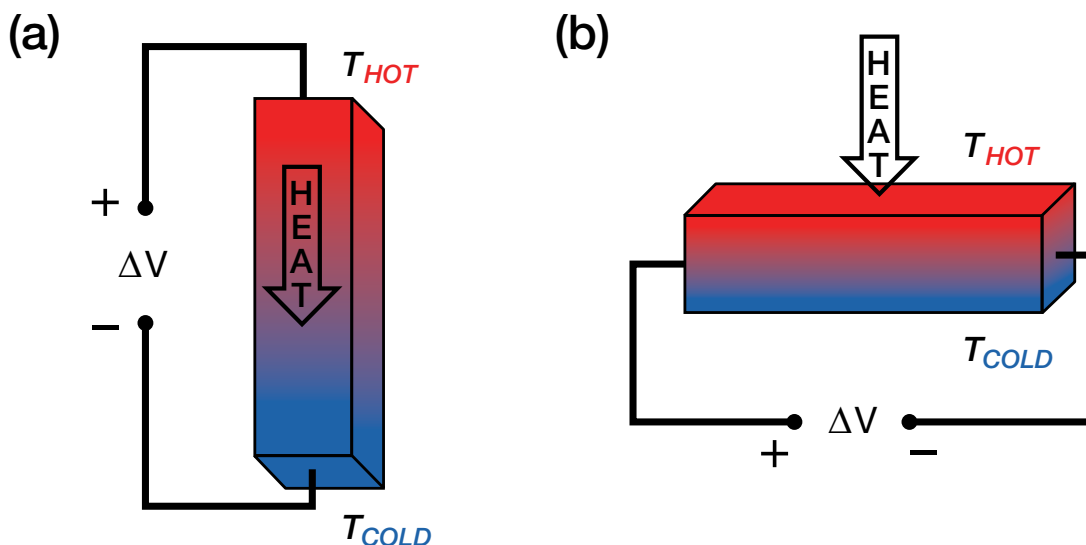


(a) Schematic of the Seebeck effect. (b) Schematic of the transverse Seebeck effect.

Wireless High Temperature Sensor Network for Boiler Systems


Performer	University of Massachusetts
Award Number	FE0031895
Project Duration	09/04/2020 – 09/03/2025
Total Project Value	\$ 499,958
Technology Area	University Training and Research

This project aims to develop a new wireless high-temperature sensor network for real-time continuous boiler condition monitoring in harsh environments. The wireless high-temperature sensor network consists of wireless radio frequency (RF) high-temperature sensors with integrated attached antennas for wireless internet-based continuous remote monitoring. Each of the new RF high-temperature sensors is based on a high-quality-factor RF filter fabricated on 4H silicon carbide semiconductor material capable of measuring high temperatures over 1,800 °C. The integrated antennas are broadband bow-tie RF antennas that can provide efficient signal transmission and reception. The wireless sensor network enables real-time and continuous

monitoring of boiler conditions to achieve smart boiler system management. The high-temperature sensor network enables network-based automatic temperature sensing and data collection, which combined with artificial intelligence algorithms allow the construction of smart boiler systems with boiler condition management and optimization for significant energy savings and reliability improvements. The research will also train graduate students in the critical technology areas of high-temperature materials, advanced manufacturing of integrated RF sensors, wireless sensor network communication, cloud computing with high security, and AI-enabled smart systems.

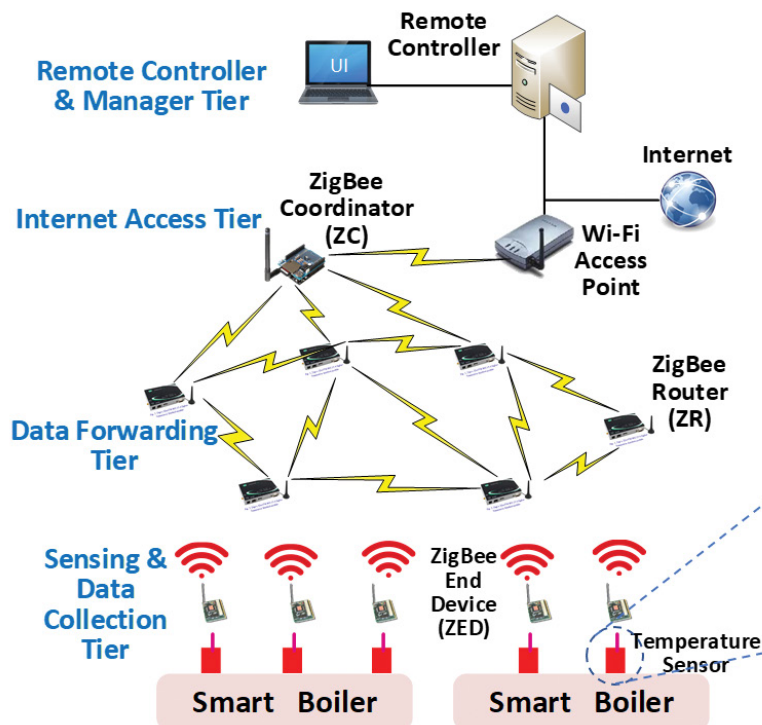

Schematic architecture of the smart boiler wireless sensor network. Each wireless high-temperature sensor is coupled with a ZigBee end device (ZED) to collect and continuously transmit the boiler temperature data in real time. The temperature data will be routed to the remote controller through the wireless mesh network and the internet as well as Wi-Fi access points. Inset: schematic structure of the wireless high-temperature sensor in boilers. It is based on a Lamb RF filter with integrated broadband bow-tie antennas for wireless temperature transfer.

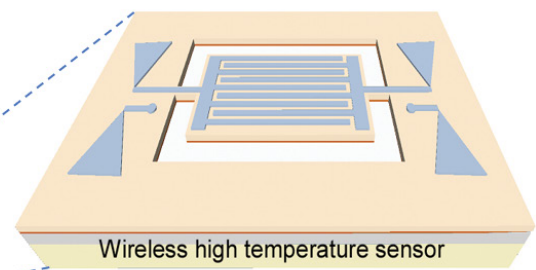


Distributed Sensors for Waste Plastics Gasification and Clean Hydrogen Production

Performer	University of Pittsburgh
Award Number	FE0032210
Project Duration	10/01/2022 – 09/30/2024
Total Project Value	\$ 634,765
Technology Area	Plant Optimization Technologies

This collaborative project seeks to develop distributed fiber sensors to perform real-time temperature and hydrogen concentration measurements to improve hydrogen production and energy efficiency for waste plastics gasification processes. Sensors to be developed by this project can be inserted into gasification reactors to perform in-situ real-time temperature and hydrogen concentration measurements inside feedstocks to achieve improved spatial resolution. Working with project partners, this project will perform distributed temperature and hydrogen sensors studies using an experimental gasification reactor to understand various gasification feedstocks and reaction conditions. Based on these results, the research team will

demonstrate a sensor-enabled gasification optimization process to improve hydrogen production and reduce harmful chemical generation.

The success of this project will significantly improve the scientific understanding of plastic gasification processes for hydrogen production. The new sensing technologies to be developed by this project will provide unprecedented insights into reaction chemistry and thermal dynamics of the gasification processes. It will provide vital data to improve reactor designs, optimize reaction control, reduce emissions, and unleash the scale-up potentials of the plastic gasification technique to support America's clean-energy transition and the hydrogen economy.

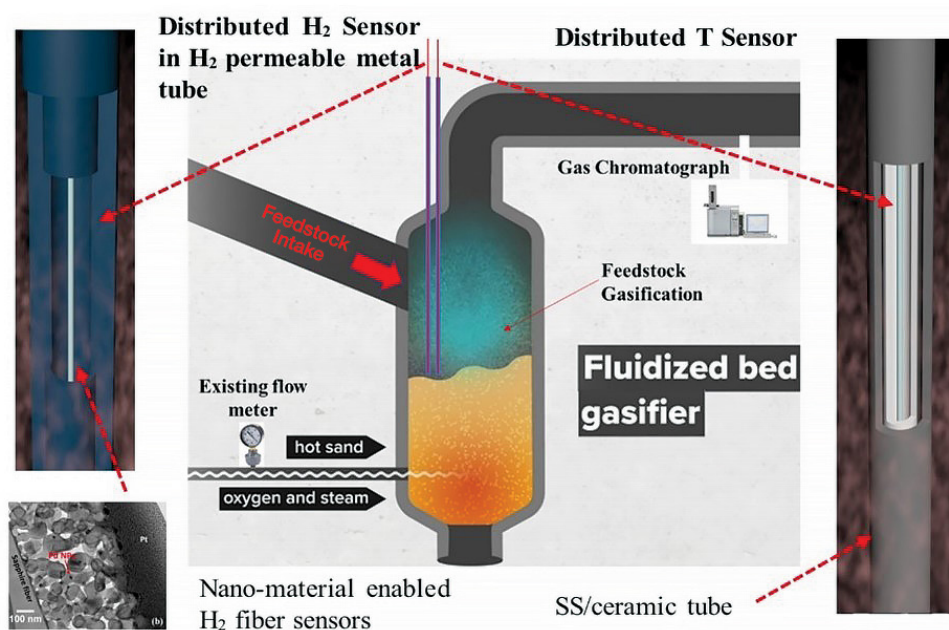

System overview.


Advanced Manufacturing of Ceramic Anchors with Embedded Sensors for Process and Health Monitoring of Coal Boilers

Performer	West Virginia University
Award Number	FE0031825
Project Duration	01/01/2020 – 08/31/2024
Total Project Value	\$ 1,254,719
Technology Area	Plant Optimization Technologies

West Virginia University Research Corporation will develop advanced manufacturing methods to fabricate and test ceramic anchors with embedded sensor technology for monitoring the health and processing conditions within pulverized coal and fluidized-bed combustion boiler systems. The goal is to place ceramic anchors within the boiler system (such as within the primary furnace and ash hopper) where information on the temperature, strain, and local crack population can be continuously monitored. The project will include the development of advanced manufacturing technologies and processes for 3D printing electroceramic (conductive ceramic) sensor designs within the ceramic anchor microstructure during the manufacturing process.

Specifically, the project team will (1) define the chemical and microstructural stability, in addition to the electrical properties, of oxide and non-oxide ceramic composites to be embedded within the $Al_2O_3-Cr_2O_3$ ceramic anchor compositions that can operate at temperatures up to 1400 degrees Celsius; (2) develop and implement the 3D printing technology to pattern and control the microstructure of the ceramic anchor and embedded sensor circuits; (3) develop an interconnect technology which will permit easy installation of the ceramic anchors and signal collection at the boiler shell; (4) develop low-power analog electronics and wireless communication hardware to efficiently collect the sensor signal at each processing unit and transmit data to a central hub for data analysis; and (5) demonstrate the smart ceramic anchor system for temperature and liner fracture within a high-temperature processing unit, such as a boiler furnace or glass melting furnace floor/wall liner.

Data collected can be used to monitor the boiler refractory liner temperature and degradation, information that currently is not available to boiler operators because no sensors are currently placed within or near the boiler furnace floor, and inserting access ports within this monolithic (seamless) refractory liner is not feasible.

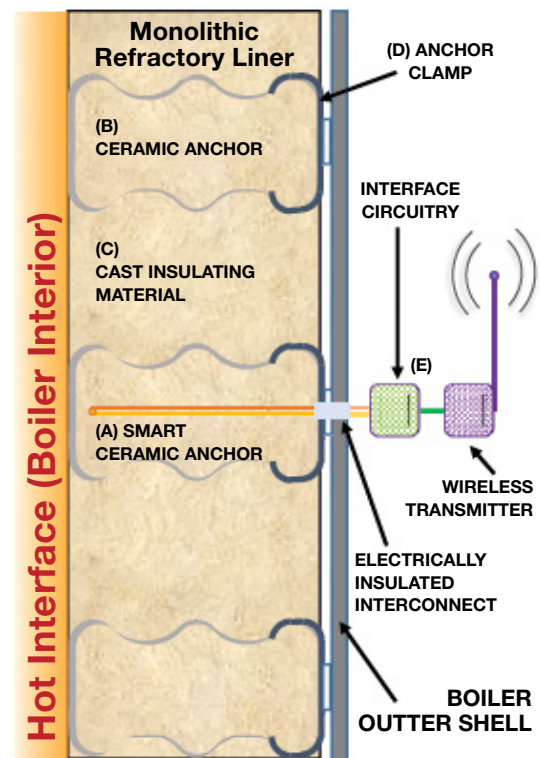

Schematic of boiler liner cross-section with smart anchors, metal interconnect clips/clamps, and low-power electronics.


An Autonomous Robotic Inspection System for Coal Ash and Tailings Storage Facilities

Performer	West Virginia University
Award Number	FE0032206
Project Duration	10/01/2022 – 09/30/2025
Total Project Value	\$ 499,846
Technology Area	Plant Optimization Technologies

The goal of the project is to prevent negative environmental and socioeconomic impacts of coal waste (coal ash and tailings) by developing an aerial robot-enabled inspection and monitoring system of active and abandoned coal ash and tailings storage facilities. The first objective of this project is the development of a programmable drone, equipped with several complementary sensors, that will autonomously inspect several structures of a storage facility. The second objective of this project is to create artificial intelligence-based hazard detection algorithms that will use multispectral and georeferenced images (i.e., thermal and visual) and 3D Point Clouds data collected by an autonomous drone to detect hazards in the storage facility structure that would indicate uncontrolled leakage to the environment or lead to the potential failure of the structure.

Coal ash is a residue left over after a coal-fired power plant

burns coal and tailings are a waste product of the coal cleaning process. Both coal ash and tailings, which contain metals that can adversely affect the environment and human health, are transported to waste storage facilities that are generally embankment dam structures. The waste stored in these structures is also used in the construction of the embankments, failure of which has been shown to be catastrophic, causing massive mudslides that devastate entire communities and create irreversible environmental damages. Wastewater leakages from the storage facilities, although less impactful, may also be very harmful to the environment and the communities they support. The aerial robot-enabled inspection and monitoring system will be able to detect hazards in the storage facility structures and alert users of these weaknesses, which can be repaired to prevent release of waste materials into the environment and nearby communities.

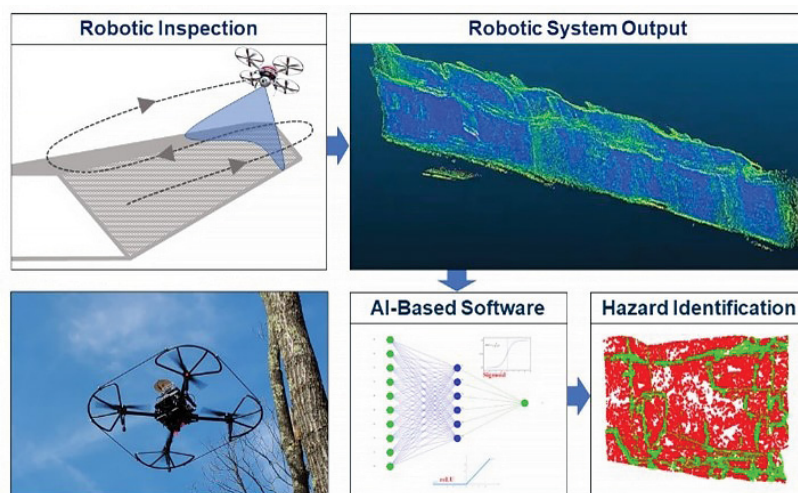

Robotic inspection and hazard identification.


Passive Wireless Sensors for Realtime Temperature and Corrosion Monitoring of Coal Boiler Components Under Flexible Operation

Performer	West Virginia University Research Corporation
Award Number	FE0031912
Project Duration	08/17/2020 – 05/16/2025
Total Project Value	\$ 500,000
Technology Area	University Training and Research

This project will develop an inexpensive wireless high-temperature sensor for real-time monitoring of the temperature and corrosion of metal components that are commonly used in coal-fired boilers. This work will focus on the fabrication and testing of harsh-environment, chipless radio-frequency identification (RFID) sensors that will function between 25 °C and 1300 °C in high steam and/or combustion gas environments. Sensor arrays will also be evaluated where each RFID sensor will be designed with a specified frequency band to spatially differentiate the testing site on the metal specimen. Specifically, this project will (1) design passive wireless RFID patch and interrogator antennas for high-temperature sensing of temperature and corrosion/crack propagation at temperatures up to 1300 °C; (2) develop materials and methods to fabricate a microstrip patch antenna sensor composed of a robust conductive electroceramic pattern and interlayer ceramic coating, and then incorporate this sensor into “peel-and-stick” preforms that will efficiently transfer and bond to the metal specimens of interest; (3) investigate the wireless RFID sensor response in accelerated high-temperature

and high-steam environments, and correlate corrosion and cracking mechanisms (and kinetics) with the response of the sensors; (4) investigate the wireless signal acquisition and processing of data transferred in various configurations by multiple sensors within the same environment and through-wall transmission of the signal by a single RFID sensor; and (5) investigate the passive wireless sensor system developed (and method of transferring the sensor system) for monitoring the temperature and health of metal components in service within a coal-fired power plant.

Applications for the passive wireless sensors are numerous within a coal boiler power plant, and these sensors will provide operators additional information over the current state-of-the-art temperature and corrosion sensors. An important strategy for managing cycling damage for flexible operation is through real-time monitoring of localized temperature and health of the various pipework, headers, rotors, and steam chests. This technology permits simplified monitoring of these components, which would greatly reduce the cost and provide valuable localized knowledge of thermal condition.

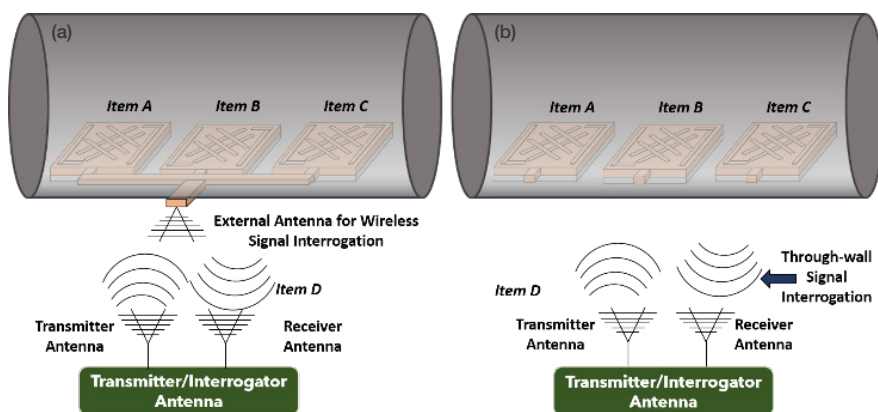

- Schematic of the multi-sensor array deposited onto the inner wall of a metal pipe to monitor corrosion rates, where each sensor focuses on a specific band range read by an external interrogator antenna.
- Schematic of the alternative interrogation method, where through-wall transmission will be tested in order to eliminate the need for an access hole.

OTHER NOVEL CONCEPTS

Duke University:

Characterization of Arsenic and Selenium in Coal Fly Ash to Improve Evaluations for Disposal and Reuse Potential..... 35

National Energy Technology Laboratory:

Magneto-hydrodynamic Channel Testing and Simulation 36

National Energy Technology Laboratory:

Artificial Intelligence-Based Theoretical Approach for Screening and Design of Functional Materials for the Harsh Environment Applications..... 37

National Energy Technology Laboratory:

Quantum Sensing for FECM Applications..... 38

Oklahoma State University:

Towards AI-Enabled Autonomy of Robotic Inspection Platforms for Sustainability of Energy Infrastructure..... 39

University of California - Riverside:

Harnessing Quantum Information Science for Enhancing Sensors in Harsh Fossil Energy Environments..... 40

University of Texas at El Paso:

Ultra-Low Disorder Graphene Quantum Dot-Based Spin Qubits for Cyber Secure Fossil Energy Infrastructure..... 41



Characterization of Arsenic and Selenium in Coal Fly Ash to Improve Evaluations for Disposal and Reuse Potential

Performer	Duke University
Award Number	FE0031748
Project Duration	09/01/2019 – 05/31/2024
Total Project Value	\$ 400,000
Technology Area	University Training and Research

This project aims to establish high-throughput characterization methods for arsenic (As) and selenium (Se) species in coal fly ash and understand how coal combustion parameters might influence leachable As and Se contents from fly ash. Specifically, the project will (1) compare methods for determining As and Se concentration, chemical speciation, and mass distribution in fly ash and establish the efficacy of these methods, taking into account data quality and operator accessibility; (2) evaluate As, Se, and fly ash characteristics and measurement methods that can improve indications of leachability and mobilization potential from fly ash; and (3) perform a survey of As and Se characterization for fly ashes representing a variety of coal feedstocks, combustion conditions, and emissions controls. Duke University will study methods to quantify the chemical forms of As and Se by comparing a series of state-of-the-art quantitative methods (e.g., synchrotron-based X-ray spectroscopy and microscopy) with alternative benchtop spectroscopy methods that are commonly employed in the materials and geological sciences.

The evaluation will consider benefits and trade-offs of each method, including quantitative versus qualitative determination, throughput capacity, and ease of sample processing. These characterization techniques will be compared to As and Se mobilization potential from fly ash as indicated by waste leaching protocols established by waste disposal regulations. These evaluations of As and Se concentration, speciation, mass distribution, and mobilization potential will be applied to a large variety of coal fly ashes that represent a range of coal sources, boiler types, ash collection systems, emissions controls, and combustion conditions.

Results obtained from this work will enable practitioners to understand data generated from qualitative methods that may be more accessible than state-of-the-art synchrotron techniques. A comprehensive database of As and Se speciation in a variety of coal fly ashes and other residuals will be generated. The study will outline advantages and tradeoffs for each method and establish correlations to leaching potential.

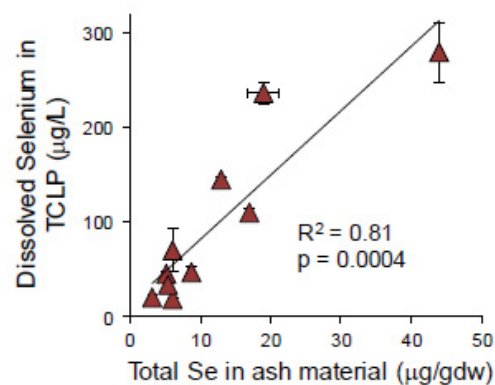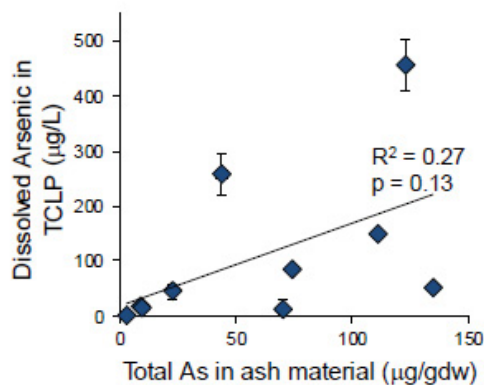

LLeachable As and Se from 10 coal ash samples subjected to the toxicity characteristic leaching procedure. Data from Schwartz et al. 2018.


Magnetohydrodynamic Channel Testing and Simulation

Performer	National Energy Technology Laboratory
Award Number	FWP-1022456 Task 83
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 5,473,002
Technology Area	Plant Optimization Technologies

This task will design, simulate, build, and test a laboratory magnetohydrodynamic (MHD) channel to validate computational predictions of performance and to assess the viability of newly identified use cases. Experiments in this task will be performed to assess plasma generation, wall heat transfer, boundary layer voltage drops, and channel


material durability. These parameters have a significant impact on system performance and, in turn, cost. The overarching goal is to reduce the cost of a high-temperature direct-fired MHD power cycle intended to economically enable carbon capture, utilization, and storage (CCUS).

PLASMA DIAGNOSTIC

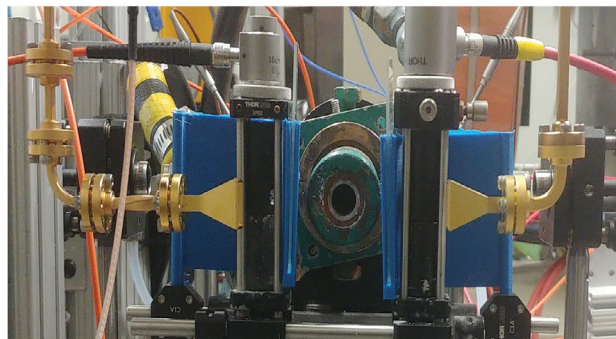

Optical Absorption
(Potassium Density)

Microwave Scattering
(Laser-induced
conductivity)

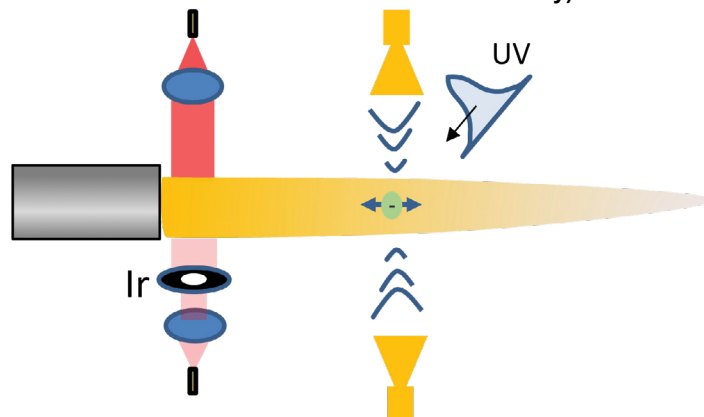


Artificial Intelligence-Based Theoretical Approach for Screening and Design of Functional Materials for the Harsh Environment Applications

Performer	National Energy Technology Laboratory
Award Number	FWP-1022456 Task 86
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 76,000
Technology Area	Plant Optimization Technologies

This task will develop a machine learning (ML)-based model to screen for new gas sensing materials to measure gas concentrations in harsh environments relevant to FECM applications, such as carbon capture, SOFCs, and energy storage technologies. The team seeks to understand the temperature dependence of sensing

materials and sensing mechanism responses in harsh environments. Subtasks include building a materials database and development and optimization of an ML model to enable prediction of temperature dependence and explore gas sensing mechanisms suited for high-temperature applications.

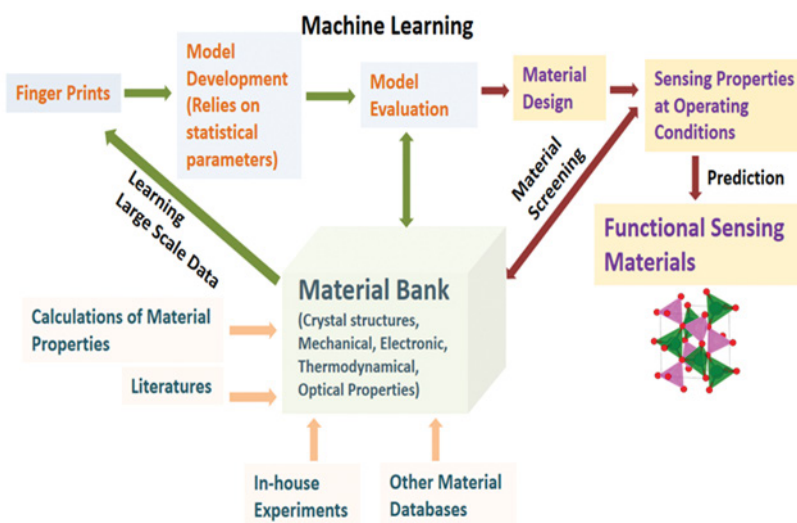

Machine learning framework for sensing materials properties and mechanisms.


Quantum Sensing for FECM Applications

Performer	National Energy Technology Laboratory
Award Number	FWP-1022456 Task 87
Project Duration	04/01/2018 – 03/31/2024
Total Project Value	\$ 131,000
Technology Area	Plant Optimization Technologies

In this task the team intends to use quantum sensing materials, quantum optics, and quantum sensing methodologies to realize unprecedented performance in advanced sensing instrumentation for high priority FECM applications, with at least an order of magnitude improvement as compared to classical counterparts within acceptable cost budgets.

Research will integrate quantum materials for chemical

sensing in subsurface monitoring of pH, CO₂, etc., of natural gas infrastructure (for CH₄), and rare earth element detection. Emphasis will be placed on low-cost quantum sensing materials that can be produced from coal byproducts. Electronic, magnetic, and optical properties of nitrogen-vacancy (NV) defective nanodiamonds will be explored as quantum sensor mechanisms.

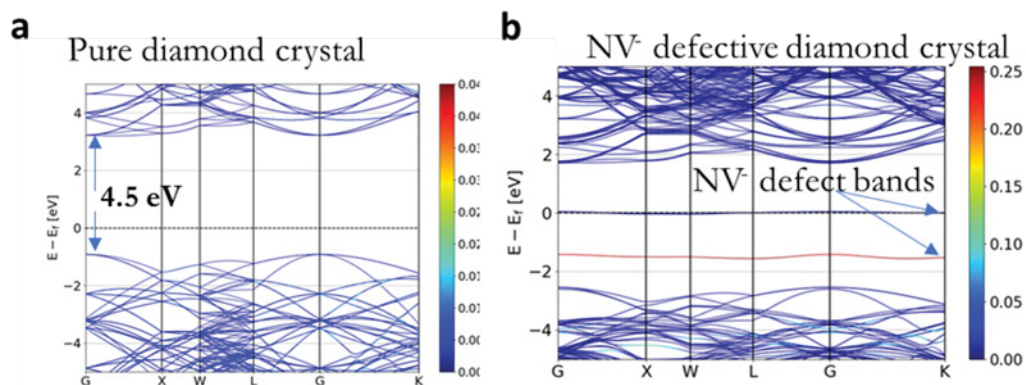


Comparison of (a) pure diamond crystal with (b) NV defective crystal.

Towards AI-Enabled Autonomy of Robotic Inspection Platforms for Sustainability of Energy Infrastructure

Performer	Oklahoma State University
Award Number	FE0032196
Project Duration	02/01/2023 – 01/31/2026
Total Project Value	\$ 508,000
Technology Area	University Carbon Research

The overall objective of the research is to develop an AI-driven integrated autonomous robotic visual inspection (RVI) platform that can perform real-time defect identification, dynamic path planning, and safe navigation in a closed-loop manner. The team's research activities have been divided into two phases: Phase I focuses on development of deep learning algorithms for image enhancement, meta-learning for defect identification, and reinforcement learning for dynamic path and motion planning for autonomous navigation. In Phase II the team will focus on simulation and experimental validation of these algorithms.

RVI technologies are employed for inspection of pipes, tanks, and other hard-to-access parts that are critical to energy sectors, hydrogen production, transport, and combustion processes, as well as carbon capture, utilization, and storage. The RVI assures the integrity of these critical energy infrastructure components, limits fugitive emissions, and ensures efficient operations. Therefore, the RVI technologies contribute to safety and emissions reduction in the energy value chain and help to enable the low-carbon energy transition.

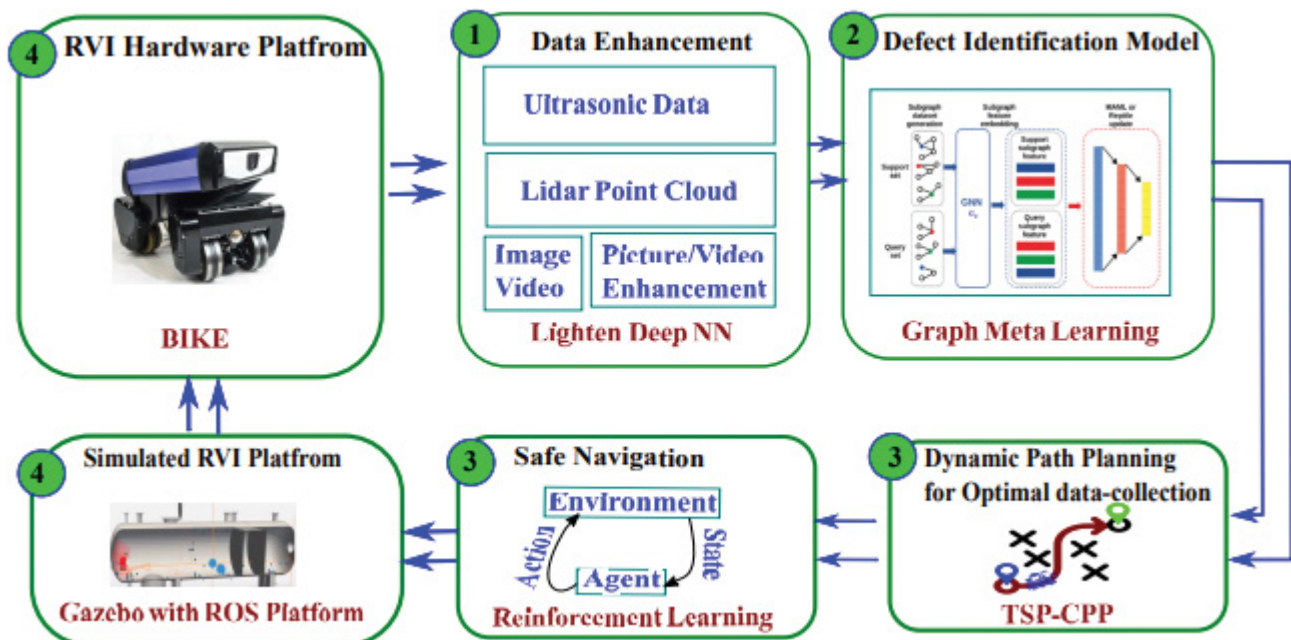


Closed-loop architecture of the proposed AI-driven autonomous robotic inspection vehicle platform.

Harnessing Quantum Information Science for Enhancing Sensors in Harsh Fossil Energy Environments

Performer	University of California - Riverside
Award Number	FE0031896
Project Duration	09/20/2020 – 09/19/2023
Total Project Value	\$ 500,000
Technology Area	University Training and Research

The project plans to utilize real-time quantum dynamics simulations and quantum optimal control algorithms to (1) harness near-surface nitrogen vacancy (NV) centers to detect chemical analytes in harsh fossil energy environments and (2) design optimally constructed electromagnetic fields for initializing these near-surface NV center spins for

efficient sensor performance and detection. Together, these objectives will leverage quantum information science to enable new sensing modalities for the extremely sensitive monitoring (i.e., below classical measurement limits) of critical operating parameters of fossil energy infrastructures in harsh environments.

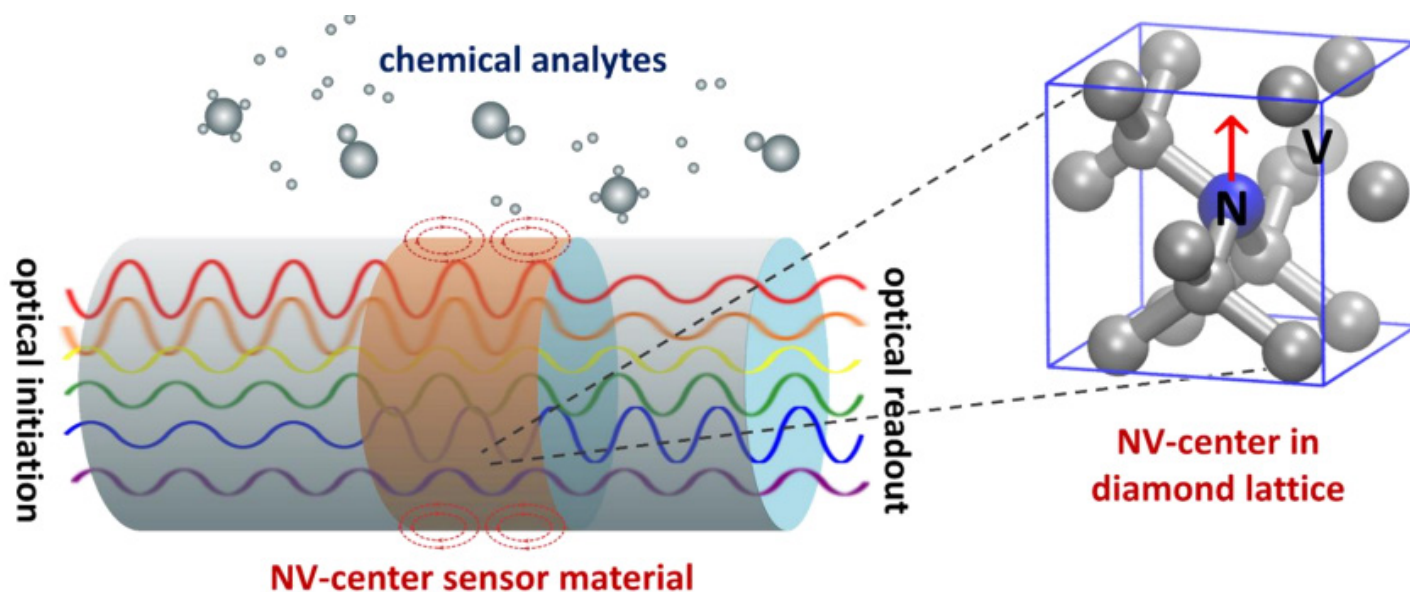

Improving sensing modalities in fossil energy infrastructures.

Ultra-Low Disorder Graphene Quantum Dot-Based Spin Qubits for Cyber Secure Fossil Energy Infrastructure


Performer	University of Texas at El Paso
Award Number	FE0031908
Project Duration	09/01/2020 – 08/31/2023
Total Project Value	\$ 499,546
Technology Area	University Training and Research

The specific research objectives of the project will be to define graphene quantum dots (GQDs) on graphene nanoribbon (GNR) with ultralow local defects and characterize the edge roughness and local disorder by diverse microscopic and spectroscopic techniques; conduct low-temperature characterization of quantum transport and spin relaxation times in GQDs to evaluate the effect of lower local disorder; and develop a multi-GQD-based qubit platform and analyze coupling effects and performance improvements achieved through the new synthetic protocols for quantum communication applications. To achieve the objectives, the team will first leverage the nanotomy technique to prepare GNRs of various widths and characterize its superiority by comparing their structural and disorder status with lithographically prepared GNRs (which will function as the baseline in the project). Subsequently, scanning probe microscopy-based oxidation lithography (SPM-OL) will be used to fabricate geometrically confined GQDs with tunnel barriers on the GNRs. Then the team will fabricate electrode patterns that connect the quantum dots to source and drain electrodes.

An in-depth study will be conducted characterizing the

local density of states and conductance of the GQDs with variable widths. Cumulatively, these studies will help in developing an optimized GQD qubit system fabricated using nanotomy and SPM-OL. Quantum transport and spin relaxation measurements conducted at mK temperatures will reveal the superiority of the present GQDs with ultralow defects. Further, the optimized GQD fabrication process will be extended to develop an array of GQDs integrated with local gate electrodes and quantum point contact to study the inter-dot coupling effects in the GQD arrays.

The primary benefit of the project is that it will result in an alternative and significantly improved strategy to formulate GQD qubits (individual and multi-GQDs) with ultralow local defects and higher spin relaxation times ($>\mu$ -seconds). The development of such GQD platforms is expected to advance state-of-the-art graphene quantum structure fabrication technologies and semiconductor spin qubits. This project will also be beneficial for ongoing research efforts to develop highly secured communication systems and thus enable the implementation of GQD spin qubits in quantum processors for cyber-resilient grid infrastructure.

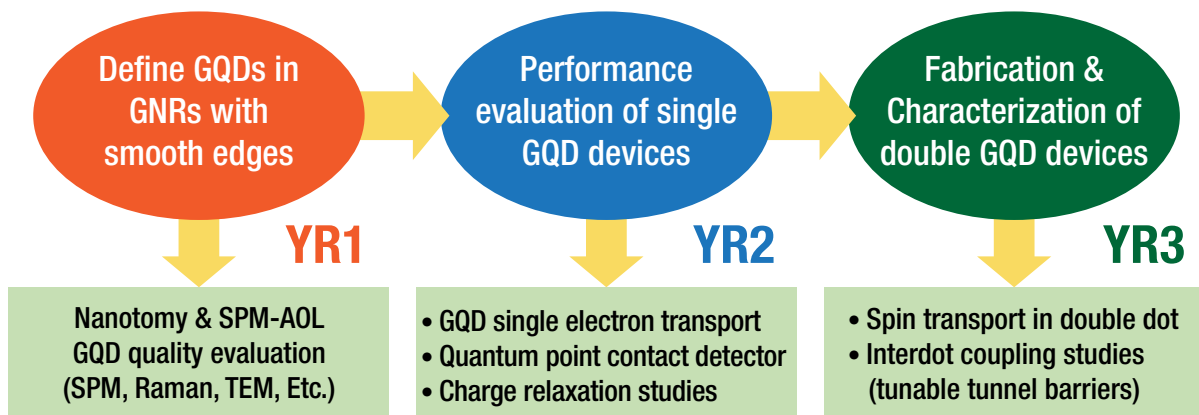

Outline of the overall effort of the proposed project.

ABBREVIATIONS

°C.....	degrees Celsius	LIBS.....	laser-induced breakdown spectroscopy
3D.....	three-dimensional	MHD.....	magnetohydrodynamic
5G-TSN.....	fifth-generation time-sensitive networking architecture	ML.....	machine learning
AI.....	artificial intelligence	N ₂	nitrogen (molecular)
Al ₂ O ₃	aluminum oxide; alumina	NETL.....	National Energy Technology Laboratory
Ar.....	argon	NV.....	nitrogen vacancy
As.....	arsenic	O ₂	oxygen (molecular)
CBM.....	condition-based monitoring	ORAP.....	Operational Reliability Analysis Program (Strategic Power Systems, Inc.)
CCUS.....	carbon capture, utilization, and storage	psi.....	pounds per square inch
CFPP(s).....	coal-fired power plant(s)	QoS.....	quality of service
CO ₂	carbon dioxide	R&D.....	research and development
CPS.....	cyber physical systems	R-SOFC.....	reversible solid oxide fuel cells
Cr ₂ O ₃	chromium (III) oxide	ReACT.....	Reaction Analysis and Chemical Transformation (NETL laboratory)
DEC.....	distributed edge computing	RF.....	radio frequency
DOE.....	Department of Energy (U.S.)	RFID.....	radio frequency identification
EMI.....	electromagnetic interference	RGA.....	Raman gas analyzer
FECM.....	Office of Fossil Energy and Carbon Management (DOE)	RVI.....	robotic visual inspection
FP.....	Fabry-Perot	SBE.....	Simulation-Based Engineering (NETL program)
FWP.....	Field Work Proposal	SCADA.....	supervisory control and data acquisition
GE.....	General Electric Company	Se.....	selenium
GNR.....	graphene nanoribbon	SmB ₆	samarium hexaboride
GQD.....	graphene quantum dot	SOFC.....	solid oxide fuel cell
H ₂	hydrogen (molecular)	SPM-OL.....	scanning probe microscopy-based oxidation lithography
H ₂ O.....	water	SSC-CCS.....	stainless steel/ceramic coaxial cable sensing
HCM.....	Hydrogen with Carbon Management	TEM.....	transmission electron microscopy
HRSRG.....	heat recovery steam generator	TRL.....	technology readiness level
IASM.....	Integrated Additive and Subtractive Manufacturing	U.S.....	United States
IoT.....	internet of things	UTEP.....	University of Texas at El Paso
IT.....	information technology	ZrB ₂	zirconium diboride

CONTACTS

Patcharin Burke

Technology Manager

Sensors, Controls, and Other Novel Concepts

412-386-7378

patcharin.burke@netl.doe.gov

David K. Lyons

Technical Project Coordinator

Integrated Carbon Management Team

304-285-4379

k.lyons@netl.doe.gov

Seth Lawson

Team Supervisor

Integrated Carbon Management Team

304-285-0578

seth.lawson@netl.doe.gov

WEBSITES:

<https://netl.doe.gov/carbon-management/sensors-and-controls>

<https://www.netl.doe.gov/carbon-management>

<https://www.energy.gov/fecm/plant-optimization-technologies>

ACKNOWLEDGEMENTS

The Sensors, Controls, and Other Novel Concepts Portfolio was developed with the support of many individuals. Key roles were played by principal investigators, federal project managers, the technology manager, the supervisor, and National Energy Technology Laboratory site-support contractors.



1450 Queen Avenue SW
Albany, OR 97321-2198
541-967-5892

3610 Collins Ferry Road
P.O. Box 880
Morgantown, WV 26507-0880
304-285-4764

626 Cochran Mill Road
P.O. Box 10940
Pittsburgh, PA 15236-0940
412-386-4687

Program staff are also located in
Houston, TX and **Anchorage, AK.**

Visit us: www.NETL.DOE.gov

@NationalEnergyTechnologyLaboratory

@NETL_DOE

@NETL_DOE



U.S. DEPARTMENT OF
ENERGY

April 2024