

2023

SUCCESS STORIES

Carbon Conversion



U.S. DEPARTMENT OF
ENERGY



NATIONAL
ENERGY
TECHNOLOGY
LABORATORY

Achieving Unprecedented Carbon Dioxide Utilization in Concrete

- CO₂Concrete™ products are projected to reduce the global warming potential (GWP) by at least 45% compared to OPC-concrete of equivalent performance grade

Anodes from Coal Waste can Significantly Improve Anode Capacity when Compared to Graphite

- The CO₂-to-concrete process was field tested at the Integrated Test Center in Gillette, Wyoming and a pilot-scale demonstration was performed at Plant Gaston (1,800 MW) which provides flue gas for the National Carbon Capture Center in Wilsonville, Alabama
- Approximately 15,000 blocks were carbonated
- Testing was successful with coal and natural gas flue gas without upfront CO₂ capture
- Achieved in excess of 75% CO₂ utilization efficiency
- CO₂Concrete product complied with industry standard specifications. Production price parity was achieved with conventional concrete blocks



- ✓ Cement production emits nearly 10 % of global CO₂
- ✓ 0.9 tons of CO₂ are emitted per ton of cement produced; 4.5 billion tonnes of cement produced annually
- ✓ Global concrete market ~ \$1 trillion /year


Waste CO₂ is incorporated and locked into the CO₂Concrete™ product.

CO₂Concrete™ Has Advantages that Solve Challenges

- Potential gigaton(s) CO₂ Utilization in Concrete by 2030
- Lower temperature routes for binder production; portlandite (800 °C) vs. Portland cement (1500 °C)
- Insensitivity to SO_x and NO_x enables direct use of stack flue gas (without CO₂ capture step)
- Mineralization is the only “thermodynamically downhill” process for CO₂ utilization
- Abundant and Low-value coal combustion residues (CCRs) used as reactants
- Manufacturability of multiple product designs: hollow core slabs, wall panels, and beams. Alternate manufacturing methods may be unlocked (3DP)

Potential CO₂ Utilization in Concrete by 2030 (gigatons)

0.6-1.4



■ Strategic actions implemented
□ Without strategic actions

Deployment will remediate waste CO₂ and coal combustion residues (CCRs).


Process Demonstrated at Pilot Scale

Field-tested using actual flue gas at the National Carbon Capture Center

- CO₂Concrete™ Products exhibit compressive strength, water absorption, etc. that comply with industry standard performance criteria (ASTM C90, PCI design manual)


Upcycle industrial wastes and CO₂

- Produce low-carbon CO₂ concrete products from coal combustion residues, flue gas CO₂, and low-grade waste heat

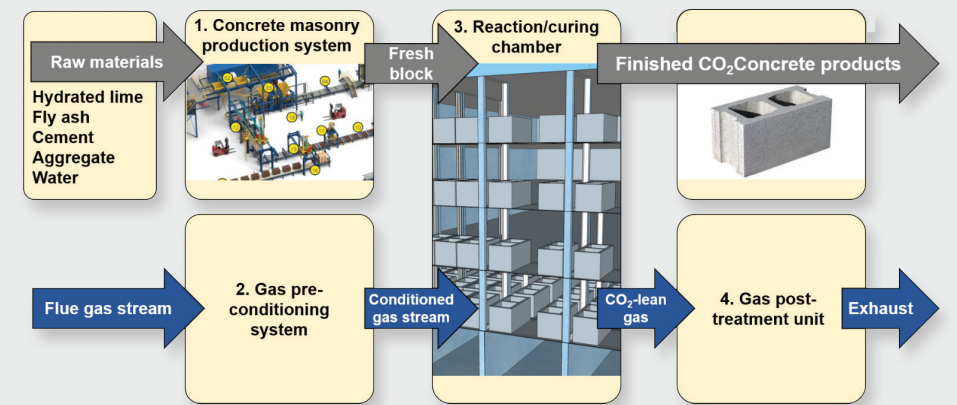

Low-carbon CO₂ concrete test samples.

Lime cycle enables scalable CO₂ mineralization

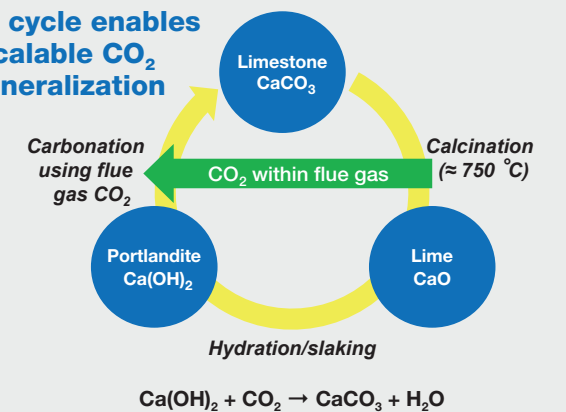

Commercialization efforts are supported by meeting best-in-class industry performance standards.

Prize Winning Technology

UCLA Wins Rigorous NRG - Canada's Oil Sands Innovation Alliance (COSIA) Carbon XPRIZE Global Competition



- In part through an NETL sponsored project, CarbonBuilt Inc., a University of California-Los Angeles (UCLA) spin-off, won a \$7.5 million grand prize in the NRG - Canada's Oil Sands Innovation Alliance (COSIA) Carbon XPRIZE Global Competition for their process that locked away and incorporated CO₂ from the emissions of power plants and industrial facilities into marketable, industrial-strength concrete
- The UCLA group became the first university team to win the grand prize in the NRG COSIA Carbon XPRIZE

Target CO₂Concrete™ Products include hollow core slabs, wall panels, and beams.

PARTNERSHIP WITH:




SCAN FOR MORE INFORMATION:



Economically Competitive, CO₂-Negative-Emission Decking Material Composites

Large-Volume Biopolymers can be Large Volume CO₂ Sinks when Modified for Decking Applications

Lignin (and/or) lignite can be upgraded through reaction with CO₂. The CO₂ modification provides the “velcro” to help lignin and lignite bond securely to other polymer matrixes. CO₂-upgraded lignin/lignite (CO₂LIG) is then used as a filler material to form CO₂LIG/plastic composites for decking applications. CO₂LIG composites produced with 60% and 70% lignin filler show higher tensile strength and elastic modulus than wood plastic composite (WPC).

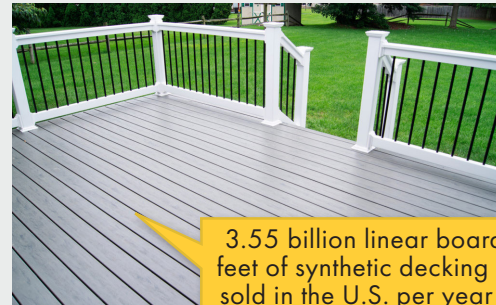

3.55 billion linear board feet of synthetic decking is sold in the U.S. per year - a \$2.8 billion market.

Minimum CO ₂ LIG selling price (\$/kg)	
Lignin	0.375
Chemicals	0.085
Utilities	0.028
By-product credits	-0.043
Capital depreciation	0.071
O&M	0.088
Return on Investment	0.106
Others (tax, etc.)	0.112
TOTAL	0.820

Preliminary Economic Analysis



Lignin is a biopolymer that provides structural support in plants




Lignite is formed from naturally compressed peat

CO₂LIG could be a CO₂ negative building material at lower cost (\$0.82/kg) than conventional building materials (HDPE, \$1/kg).


CO₂ Upgrading of Lignin and/or Lignite Filler

Incorporating CO₂ into the structure of lignin/lignite improves the compatibility and strength of adhesion with the polymer matrix materials used in decking products.

- The Kolbe-Schmidt carboxylation reaction is used to bind CO₂ to aromatic phenolates that are common in the lignin/lignite structure. This forms durable carbon-carbon bonds that lock CO₂ into the lignin/lignite structure
- It is possible to incorporate 1-5 wt.% CO₂ into the lignin/lignite structure through chemical modification – due to the size of the U.S. market, this implies that through this process, hundreds of thousands of tonnes of CO₂ per year could be sequestered in CO₂LIG composites for decking applications

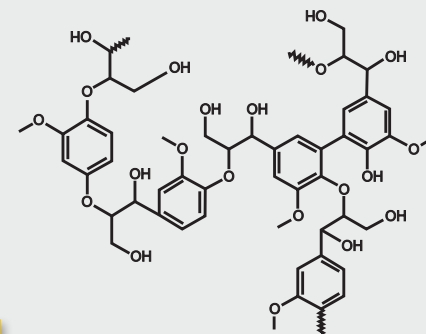


Kolbe-Schmidt Reaction



Waste CO₂ is incorporated and locked into the composite decking product.


Composite Development Efforts are Showing Promise

The process conditions for manufacturing CO₂LIG-polymer composites have been identified

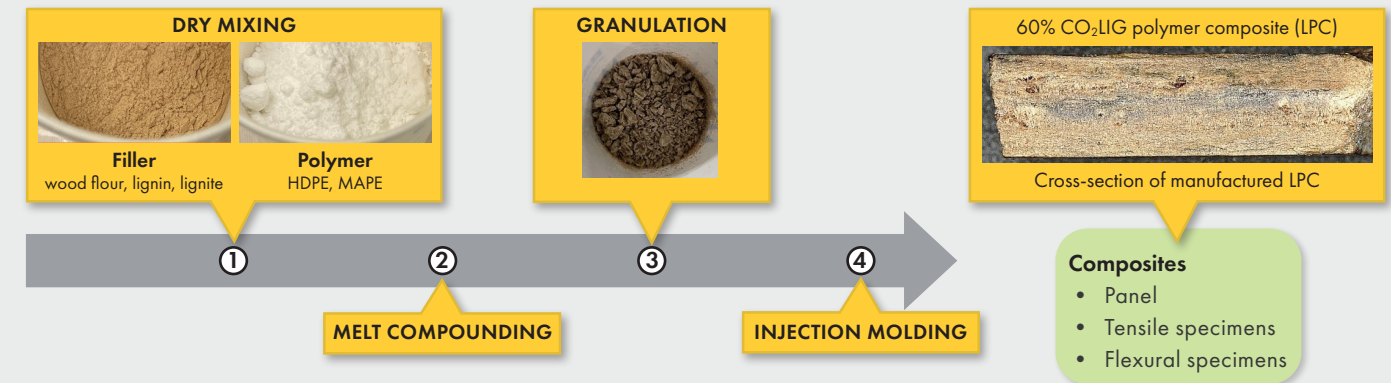

The composites produced have shown favorable mechanical properties

60% and 70% CO₂LIG polymer composites (DEC25 and DEC26) show comparable mechanical properties to other composite materials: WF = wood flour plastic composites. MAPE = maleic anhydride polyethylene

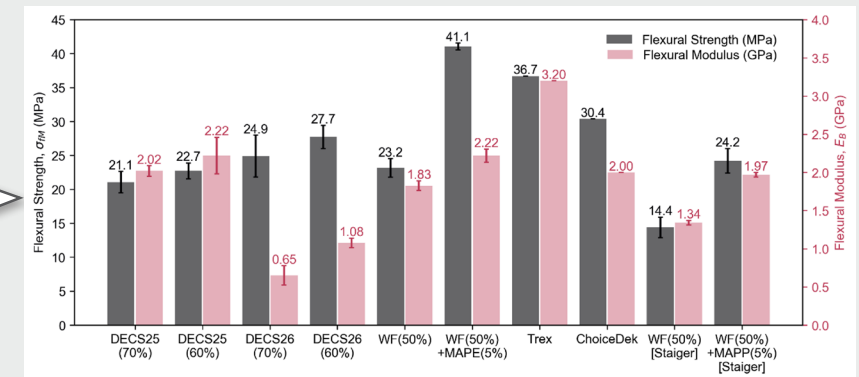

CO₂LIG composites show comparable mechanical properties to commercial products.

Significant Knowledge Gained and Shared for Manufacturing CO₂-Negative Building Composites

- 2 Submitted U.S. Patent/Provisional Patent Applications
- 1 Invention Disclosure
- 3 Manuscript Publications in Preparation
- 1 Keynote Talk at Baker Hughes’s Energy Frontier Summit
- 2 Presentations (Workshop at University of Minnesota and 2023 Spring ACS Meeting)
- 3 Abstracts Submitted to Conferences (47th International Technical Conference on Clean Energy and 2023 AIChE Annual Meeting)



Dissemination of project results benefits the R&D community.

PARTNERSHIP WITH:



SCAN FOR MORE INFORMATION:





NETL Produces Syngas with Massive Carbon Savings using Proprietary Microwave Technologies

NETL Microwave Catalysts Produce Syngas by Consuming Waste Greenhouse Gases and Using Little Energy

NETL has used microwave technologies to demonstrate mixed reforming of methane (MRM) to generate syngas in a 2:1 ratio (H₂:CO). Syngas with this composition is an ideal chemical precursor used in the production of common industrial chemicals.

NETL's microwave catalysts can produce syngas by generating H₂ with just 22 kWh/kg energy use and simultaneously produce CO with just 3.3 kWh/kg energy use.

Such low energy use is far below the DOE water electrolysis energy use target of 43 kWh/kg H₂ and well below the conventional carbon dioxide electrolyzer energy use of 4.8 kWh/kg CO.

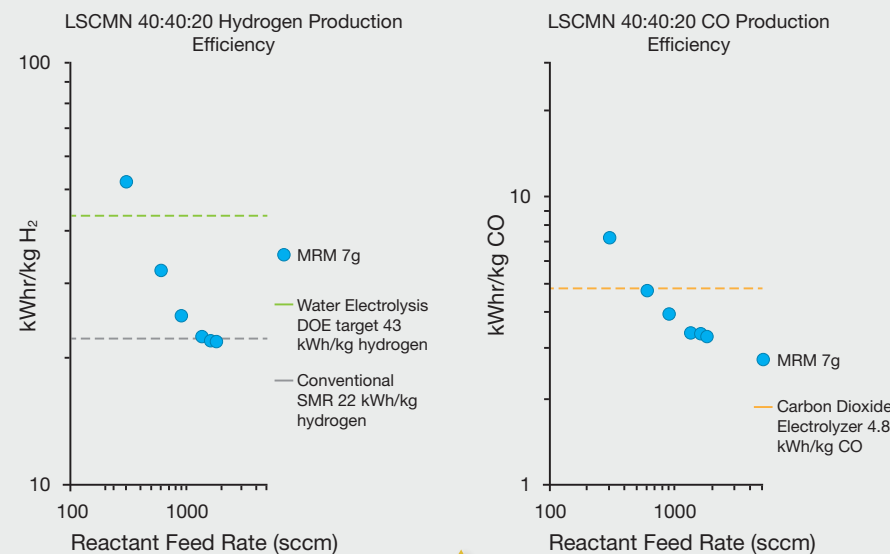

Energy requirements for H₂ and CO production through microwave-assisted mixed reforming of methane (MRM), steam methane reforming (SMR), and electrochemical processes.

NETL's microwave-assisted production of syngas uses only slightly more energy as fossil-based production but consumes waste CO₂ and is powered by clean electricity.

Benefits of Microwave-Assisted Catalytic Processes

- Can reduce carbon emissions by converting greenhouse gases into value-added products
- Rapid and selective heating of catalysts and/or reactants which allows for the use of smaller reactors and smaller downstream separation units
- Flexible and tunable microwave fields can be used to respond to variations in feed rate and feed composition
- Just like state-of-the-art electrochemical technologies, microwave systems can be powered by clean, low-carbon electricity
- Low energy use (highly efficient) and high product yield


Pre-pilot Scale Microwave Demonstrations



Unlocking the benefits of microwave technology could promote the commercialization of low-carbon or net-negative carbon products.

Microwave Development Efforts are Showing Diversified Promise and Go Beyond Syngas Production


NETL is developing microwave-active materials that convert waste CO₂ into chemical feedstocks (syngas) used for industrial chemicals production, is pursuing the identification and scale-up of microwave-active catalysts for use in reactive capture and conversion applications, and is pursuing the microwave-assisted conversion of CO₂ into polycarbonates.

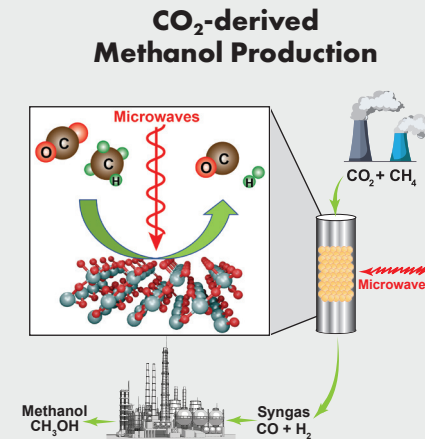

Techno-economic analysis (TEA) shows the NETL-developed microwave process can produce CO₂-derived methanol (using syngas as a precursor) at prices (\$1-2/gallon) approaching those of current industrial practices.

Sorbents for Microwave Reactive Capture and Conversion

The performances of SrO, CaO, BaO, Li₂O, and La₂O₃ have been screened in their oxide and hydroxide forms to down-select the most efficient and selective CO₂ reactive capture material. SrO was selected for further development due to its superior stability and run-to-run consistency.

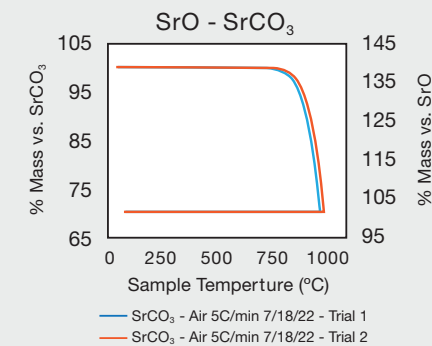

Conversion of CO₂ into polycarbonates

Initial development efforts are targeting to demonstrate 10% diol conversion and at least 20% polycarbonate yield at reaction times < 8 hrs.

- Initial reaction runs show that unintended moisture must be removed from the reaction media as its presence results in low equilibrium carbonate yield. However, the microwave systems had less water than thermal systems and reached equilibrium faster than the thermal baseline.

Microwave technologies are being applied to multiple processes and products.

Critical Findings are Being Patented and Shared and Scale-Up Efforts are Ongoing

These efforts have resulted in several discussions with potential industrial partners, and the team has successfully produced 10-kg scale batches of its microwave catalysts for near-term, commercial-scale demonstration.

NETL has filed patents and published many peer-reviewed articles demonstrating proof-of-concept of this technology.



Engagement of industrial partners is underway.



SCAN FOR MORE INFORMATION:




Testing Integrated Capture and Conversion at Engineering Scale through Algae Cultivation

Successfully Scaled the Integrated Algae Cultivation System to a 3.2 Acre Raceway

The 0.2 acre, 0.3 acre, and 3.2 acre-raceways were updated to improve scalability and productivity while using Global Algae's proprietary cultivation technology

- The integrated system, as shown to the right, includes power plant flue gas supply, CO₂ capture absorbers, algae cultivation raceways, harvesting system, and product processing systems.
- Parametric testing and integrated tests (~ten 7-day long tests) were performed using power plant CO₂ (~3.5% CO₂ concentration) with full media recycle.

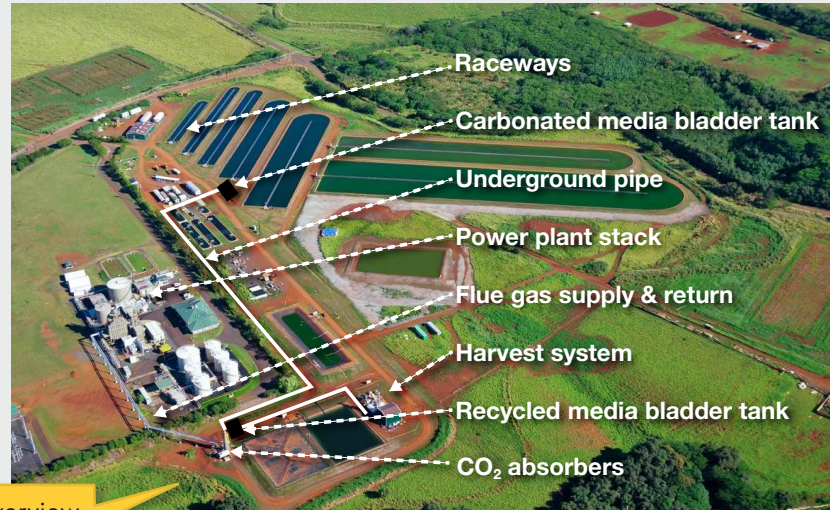

Operations Overview

Flue gas CO₂ is incorporated and locked into bio-derived products.

New Upgrades Bring Advantages

The integrated system, with new pumps and lines to connect the absorber, raceways, and harvester with the new water bladder tanks enables the capture and storage of CO₂ for 24 hours/day to account for variable demand.


- Eliminates the need for raceway gas distribution systems and controls
- The absorber demonstrated ~88% CO₂ capture efficiency
- Expected to result in \$25-50/ton CO₂ captured, stored, and delivered to the raceway
- 90%-100% CO₂ utilization efficiency is projected



Recycled Media Bladder Tank



Carbonated Media Bladder Tank


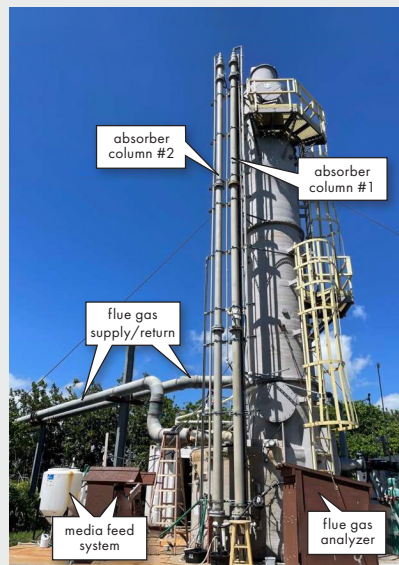


Absorber System

Integrated system supports low total cost of CO₂ capture, storage, and delivery.

Favorable Performance and Economics Expected for the Fully Integrated System

Techno-economic analysis shows that the total product production cost is \$1224/mt whereas the value of the composite product (includes all products in the adjacent table) is \$1400/mt, which indicates that this approach can profitably utilize CO₂ and convert it into value-added products.

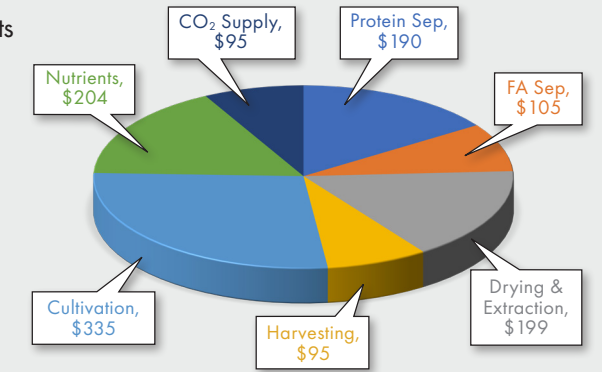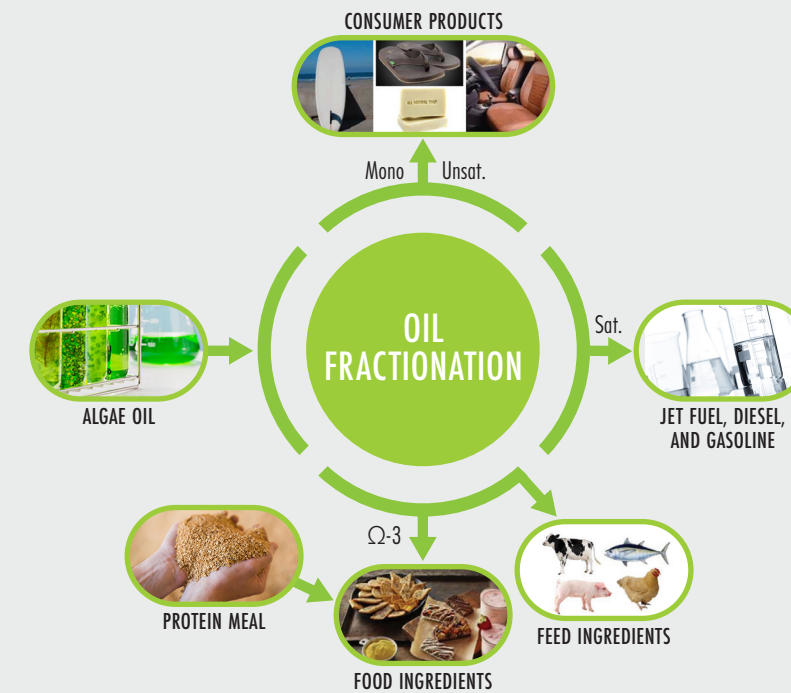

Product	% of AFDW	Value (\$/mt)
Protein concentrate	12%	1800
M. unsat. fatty acid	17%	2300
Sat. fatty acid	17%	1400
Omega-3	6%	4200
Glycerin	5%	1100
Protein meal	43%	570
Composite price	100%	1400

Favorable economics justify further scaleup and investment.

Grading Permit Issued for Further Scaleup

Going beyond favorable economics, scaleup is encouraged due to demonstrated absorber performance that matches process model predictions, algae productivity that is same whether CO₂ from fresh bicarbonate or CO₂ absorbed from flue gas is used, and because test output performance can be predicted with 97% accuracy based on input variables.



Scaleup and commercialization efforts are rapidly progressing.

PARTNERSHIP WITH:



SCAN FOR MORE INFORMATION:



For more information on Carbon Conversion, visit us at:

<https://netl.doe.gov/carbon-management/carbon-conversion>

Get Social with Us

There are several ways to join the conversation and connect with NETL's Carbon Conversion activities:



Carbon Conversion Contacts:

Joseph Stoffa

NETL Technology Manager
304-285-0285
joseph.stoffa@netl.doe.gov

Emily Connor

HQ Program Manager
emily.connor@hq.doe.gov



U.S. DEPARTMENT OF
ENERGY



NATIONAL
ENERGY
TECHNOLOGY
LABORATORY