

# PROJECT facts

U.S. DEPARTMENT OF ENERGY  
OFFICE OF FOSSIL ENERGY  
NATIONAL ENERGY TECHNOLOGY LABORATORY



## DEVELOPMENT AND EVALUATION OF NANOSCALE SORBENTS FOR MERCURY CAPTURE FROM WARM FUEL GAS

### CONTACTS

#### Robert R. Romanosky

Advanced Research  
Technology Manager  
National Energy Technology  
Laboratory  
3610 Collins Ferry Road  
P.O. Box 880  
Morgantown, WV 26507  
304-285-4721  
robert.romanosky@netl.doe.gov

#### Ronald W. Breault


Project Director  
National Energy Technology  
Laboratory  
3610 Collins Ferry Road  
P.O. Box 880  
Morgantown, WV 26507  
304-285-4486  
ron.breault@netl.doe.gov

#### Raja A. Jadhav

Principal Investigator  
Gas Technology Institute  
1700 South Mount Prospect Road  
Des Plaines, IL 60018-1804  
847-768-0807

### Background

Control of mercury emissions from coal gasifier systems is a difficult task, in part due to its high volatility and much lower concentration in a large volume of fuel gas. In addition, mercury in the fuel gas exists predominantly in the elemental form, the most difficult form to capture. Activated carbon-based processes are currently available for removal of mercury at lower temperatures ( $< 250$  °F). However, for IGCC systems, such low-temperature processes result in severe energy penalty and reduced efficiency. Therefore, current focus is on developing sorbents for removal of mercury from warm fuel gas in the temperature range of 300–700 °F and at high pressures (300–1000 psi). Highly reactive mercury sorbents with a potential to remove other pollutants (such as  $H_2S$  and arsenic) are desired. In addition, there is a need of fundamental understanding of sorbent-mercury interaction in realistic fuel gas conditions, so that reactive and high-capacity sorbents can be developed.

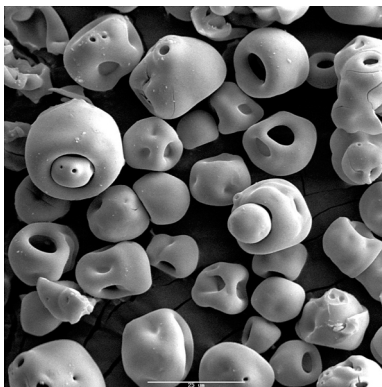

The SEM picture on left shows clusters of NanoActive™ metal oxide with agglomerates in 10–30 micrometer size range. These porous agglomerates consist of highly reactive nanocrystals, typically 2–10 nanometers in size, that can be granulated into even larger clusters or pellets for practical application as shown in the photograph on the right side.



## ADDRESS

### **National Energy Technology Laboratory**

1450 Queen Avenue SW  
Albany, OR 97321-2198  
541-967-5892

2175 University Avenue South  
Suite 201  
Fairbanks, AK 99709  
907-452-2559

3610 Collins Ferry Road  
P.O. Box 880  
Morgantown, WV 26507-0880  
304-285-4764

626 Cochran Mill Road  
P.O. Box 10940  
Pittsburgh, PA 15236-0940  
412-386-4687

One West Third Street, Suite 1400  
Tulsa, OK 74103-3519  
918-699-2000

## CUSTOMER SERVICE

**1-800-553-7681**

## WEBSITE

[www.netl.doe.gov](http://www.netl.doe.gov)

Gas Technology Institute, in collaboration with NanoScale Materials, Inc., is evaluating novel nanocrystalline sorbents for removal of mercury from coal-gasifier fuel gas. These nanomaterials exhibit a wide array of remarkable chemical and physical properties. These materials have large surface areas due to their unique morphology and porous nature. Such unusual morphology results in enhanced chemical reactivity of the sorbent. These sorbents have a potential to reduce mercury concentration in fuel gas to ultra-low levels to meet the DOE requirement for future Vision 21 power plants.

## Objective

The overall objective of this project is to develop and evaluate nanocrystalline sorbents with a potential to remove 100% mercury from post-gasification warm fuel gas (300–700 °F). Another objective is to carry out detailed experimental studies to understand the mechanism of mercury capture by the sorbents.

## Goals

- Synthesize nanocrystalline metal oxides and binary metal oxides with high surface area and pore volume.
- Evaluate metal oxides/sulfides for their potential to remove mercury from vapor phase.
- Analyze reacted sorbents to understand the fundamental nature of interaction between the sorbent and mercury.

## Benefits

Nanocrystalline sorbents, because of their higher reactivity, have the potential to remove mercury (and possibly H<sub>2</sub>S and arsenic) from fuel gas to ultra-low levels, and they could drastically reduce the overall cost of pollutant control.