


TURBINE THERMAL MANAGEMENT

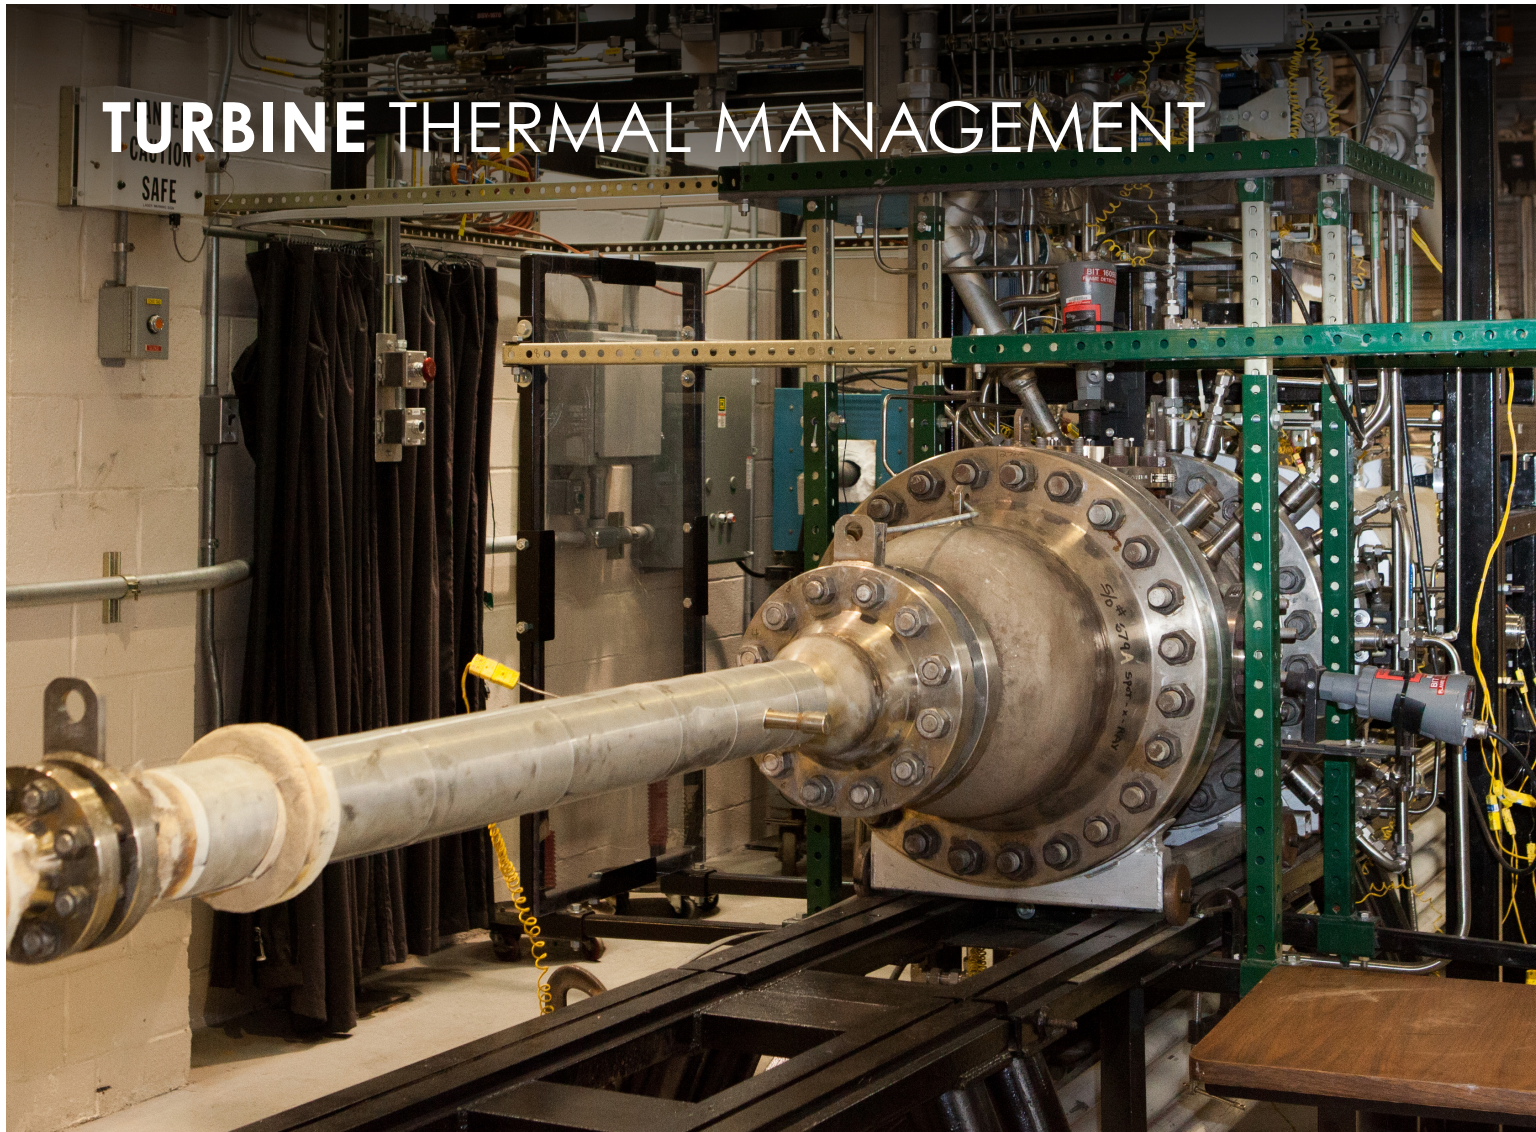

NETL

NATIONAL ENERGY TECHNOLOGY LABORATORY

The gas turbine is the workhorse of power generation, and technology advances to current land-based turbines are directly linked to our country's economic and energy security. Technical advancement for any type of gas turbine generally implies better performance, greater efficiency, and extended component life. From the standpoint of cycle efficiency and durability, this suggests that a continual goal for higher gas turbine-inlet temperatures with reduced coolant levels is desirable.

The realization of future high-efficiency, near-zero-emission turbine power systems depends on the advancement of thermal protection of hot sections such as first-stage vanes and blades and control of secondary flows. Current technology for protecting such airfoils relies primarily on the combined effects of a thermal barrier coating (TBC) and convective cooling. However, state-of-the-art development in both TBC materials and cooling technologies is insufficient to meet the thermal-mechanical demands imposed by hot gases with elevated turbine-inlet temperatures. This suggests that significant advances in turbine cooling effectiveness as well as TBC performance and durability are required. This research effort aims to significantly advance TBC material and aerothermal cooling technologies.

In addition to addressing technology advancements that improve gas turbine airfoil performance, pressure gain combustion has been identified as a possible means for improving plant operating efficiency. Unlike the Brayton Cycle of a conventional gas turbine engine (which experiences a pressure drop across the combustor), the combustion process in a Humphrey (or Atkinson) Cycle produces a pressure gain that even under conservative estimates could result in up to a 6% increase in overall system efficiency. Rotating Detonation Combustion (RDC) capitalizes on this cycle and offers potential as a drop in replacement for conventional gas turbine combustors. In addition to the potential gain in efficiency due to minimal time spent at peak combustion temperatures, NO_x may also be reduced. The work conducted in the Turbine Thermal Management project explores the potential of RDC and is addressing its technical challenges.

TURBINE THERMAL MANAGEMENT RESEARCH AT NETL

The U.S. DOE NETL Turbine Thermal Management team is taking an integrated, systematic approach to addressing advanced turbine needs. The primary objective of this research is to support the hydrogen turbine technology area in meeting the Department of Energy's (DOE) advanced turbine development goal, which calls for a 5% increase in power island efficiency and a 30% power increase above the hydrogen-fueled combined cycle baseline.

Research projects utilize the extensive expertise and facilities readily available at NETL and participating universities. The research approach includes explorative studies based on scaled models and prototype coupon tests conducted under realistic pressurized, high-temperature turbine operating conditions.

Technical goals for turbine thermal management research include:

- Development of novel, manufacturable internal airfoil cooling technology concepts that achieve a cooling enhancement factor of approximately five times that of smooth state-of-the-art cooling channel surfaces
- Development of advanced, manufacturable airfoil film cooling concepts that achieve a 50% reduction in required cooling flow
- Design, construction, and operation of a world-class facility for testing new cooling improvement strategies for the turbine rotating blade platform
- Development of advanced material system architectures that permit operation of turbine airfoils at temperatures approximately 50–100 °C higher than current state-of-the-art components
- Manufacture of commercially cast test coupons that contain advanced cooling concepts (i.e., fully bridged or partially detached pin-fins, tripod film cooling holes, trailing edge configurations, and near-surface-embedded micro-channels) with subsequent integration into airfoil geometries for prototype, sub-pilot-scale testing under representative gas turbine engine conditions

Technical goals for pressure-gain combustion research include:

- Demonstrate reliable deflagration-to-detonation transition and detonation initiation with natural gas and natural gas-hydrogen fuel blends
- Achieve sustained rotating detonation combustion in an annular combustor operation with natural gas and natural gas-hydrogen fuel blends
- Explore optimal operating conditions to reduce non-detonative combustion that adversely impacts potential efficiency improvements
- Examine combustor configurations to achieve quasi-steady exit flow
- Consider the influence of mixing strategy and operating conditions on NO_x emissions
- Produce high-fidelity experimental data intended for the validation of continuous detonation numerical models.


IMPACT AND BENEFITS

Research results obtained through these projects can directly benefit the U.S. power and utility turbine industries by improving product development and meeting DOE's advanced turbine program goals for higher efficiencies and reduced emissions. Higher efficiencies implies alleviating dependence on foreign resources and improving preservation of domestic natural resources as we transition to greater reliance on renewable energy. Reduced emissions implies better environmental conditions and lower costs for pollution controls, including carbon capture and sequestration. These factors will eventually lead to greater energy security and economy for our country as we work toward net-zero carbon emissions in the power sector by 2035 and in the broader economy by 2050.

Trailing Edge Cooling

UPitt, NETL


- Experimental Testing and CFD Modeling of Zig-Zag Designs w/w-o Turbulators & w/w-oTrench



Advanced Internal & Transpiration Cooling

UPitt, NETL


- Advanced Fully Bridged and Detached Pin Fin Internal Cooling Concepts
- Near Surface Embedded Micro-Channel Concept



Aerothermal Testing

NETL


- High Temperature, Pressurized Testing of Advanced Cooling Concepts under Combustion Gas Conditions




Advanced Film Cooling

VT, NETL

- Tripod Hole Experimental Testing and CFD Modeling



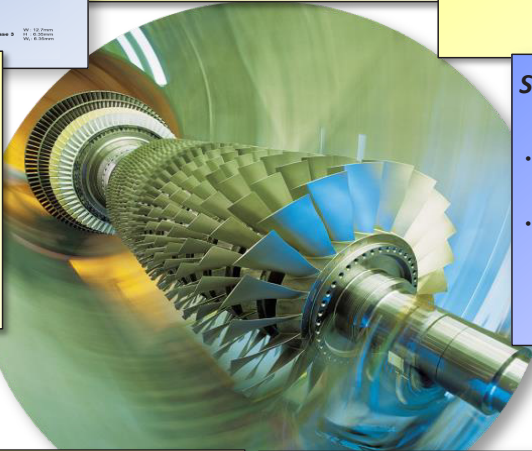


Secondary Flow Rotating Rig

PSU, NETL


- World Class Test Facility to Reduce Fuel Burn
- Assessment of Advanced Airfoil Cooling Concepts



Materials Development

NETL, CFI, WPC, UPitt


- Low Cost Bond Coat Systems
- Diffusion Barrier Coatings
- Extreme Temperature Overlayers
- High Temperature Testing with Steam



Advanced Materials

NETL, NASA GRC, Ames Lab


- Ceramic Matrix Composites (CMCs)
- Oxide Dispersion Strengthened (ODS) Matrices



Concept Manufacturing

NETL, Mikro Systems Inc.


- Internal Cooling Pin Fin Arrays
- Trailing Edge Configurations
- Film Cooling Tripod Holes
- Near Surface Embedded Micro-Channels



Pressure Gain Combustion

NETL

- Rotating Detonation Combustion to produce a pressure gain across the combustor for improved efficiency



NETL is a U.S. Department of Energy national laboratory that drives innovation and delivers technological solutions for an environmentally sustainable and prosperous energy future. By leveraging its world-class talent and research facilities, NETL is ensuring affordable, abundant and reliable energy that drives a robust economy and national security, while developing technologies to manage carbon across the full life cycle, enabling environmental sustainability for all Americans



Research Partners

Leidos Research Support Team (LRST) | The Pennsylvania State University | University of Pittsburgh | Virginia Polytechnic Institute and State University

Contacts

Peter Strakey

Principal Investigator

Research Scientist

Peter.Strakey@netl.doe.gov

Ronald Breault

Supervisor, Thermal Sciences Team

Energy Conversion Engineering Directorate

Ronald.Breault@netl.doe.gov